METRIC

A-A-54740
1 September 1992

COMMERCIAL ITEM DESCRIPTION

CRUCIBLE, FILTERING, LABORATORY
(Gooch, Low Form)

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Military Specification MIL-C-3659A which is cancelled.

This Commercial Item Description covers all glass Gooch low form type laboratory filtering crucibles with fine grade porosity fritted disks.

Salient Characteristics:

Shall be reusable low form glass Gooch type filtering crucibles with the following milliliter capacities (see "Ordering data").

15 ml
30 ml

Shall include a fused-in fritted disk with each crucible. Each fritted disk shall have a porosity size between 3.5 and 5.5 microns.

Shall have body and fritted disk for each crucible fabricated from borosilicate glass conforming to Type 1, Class A of ASTM E438.

Shall conform to Figure 1 for design and dimensions. (See Page 5). Slight variations in configuration from that indicated in Figure 1 shall be acceptable provided they do not conflict with other requirements in this document. Commercial tolerances shall apply to the nominal dimensions. Each crucible shall be circular in cross section, and shall include a top rim that has a reinforcing bead or is fire polished, and a bottom rim that is fire polished.

Shall be permanently marked to include the manfuacturer's name or trademark, the rated capacity, and the porosity grade of the disk (e.g. letter symbol "F").

AMSC\NA FSC 6640

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.

Shall be designed for collecting fine precipitates by filtration and drying laboratory procedures. Shall be suitable for drying the precipitates to constant weight at 110°C.

Workmanship. The laboratory filtering crucibles shall be free from defects which detract from their appearance or impair their serviceability.

Unit. Each (EA). One crucible, as specified, constitutes one unit.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Inspections and tests. Inspections and tests shall be conducted on the laboratory filtering crucibles in accordance with commercial practice to determine compliance with specification requirements. Sampling for the inspections and tests shall be in accordance with commercial practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.

Metric Products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerance specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerance specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.

Preservation, packaging, packing, labeling and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Other publications. The following documents form a part of this specification to the extent that is specified herein. Unless otherwise indicated, the effect on date of invitation for bids or request for proposals shall apply.

ASTM E438 Standard Specification for Glasses in Laboratory Apparatus.

(Application for copies should be addressed to ASTM, 1916 Race Street, Philadelphia, PA 19103).

Ordering data. Capacity size required, intermediate/exterior package quantities and labeling and marking must be specified in the contract and/or order.

NOTE: The following National Stock Number is covered by this document:

NSN	ITEM IDENTIFICATION
6640-00-419-3050	CRUCIBLE, FILTERING, LABORATORY, Gooch, Low Form, Fritted, 30 ml

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

PREPARING ACTIVITY:
DoD - MB

Agent:


DLA-DM

CIVIL AGENCY COORDINATING ACTIVITY:

VA-OSS
USPHS
FDA-MPQAS

Project No. 6640-1774

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.

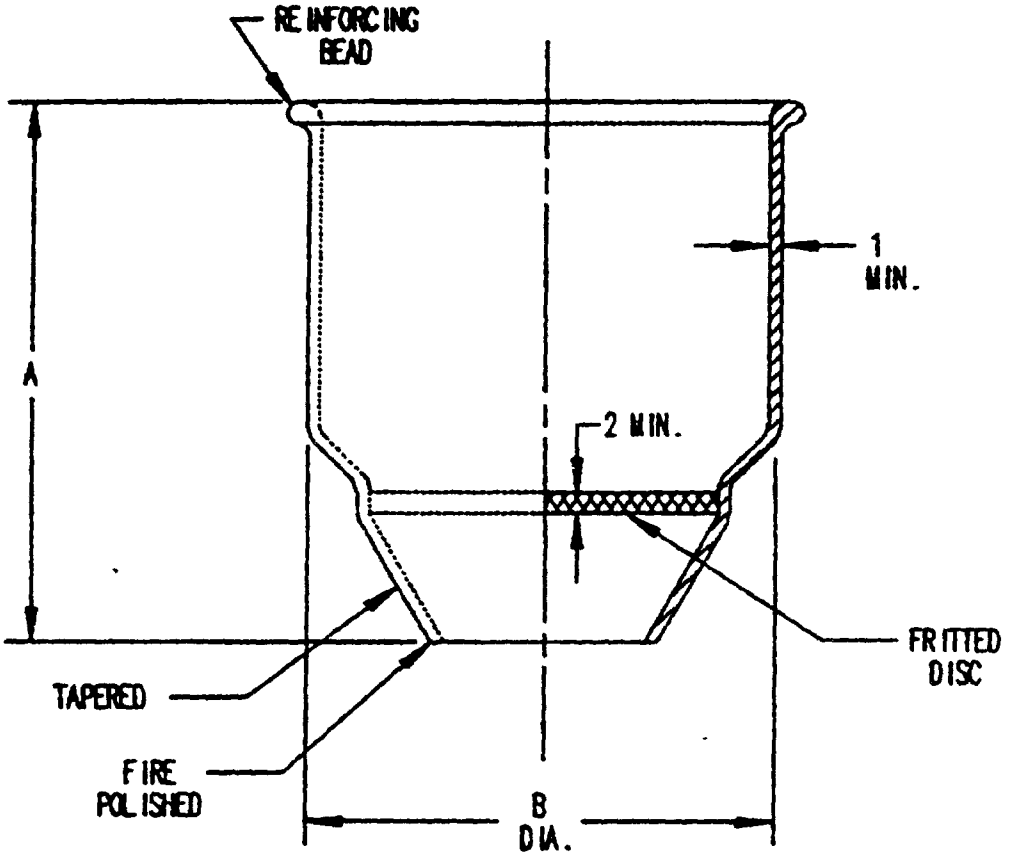

NOTE:

1. ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

NSN	CAPACITY	A	B	DIAMETER OF FRITTED DISC
	15 ML	45	30	20
6540-00-419-3050	30 ML	50	41	30

FIGURE 1 CRUCIBLE, FILTERING, LABORATORY, (GOOCH, LOW LEVEL)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-54740	1 SEP 92

3. DOCUMENT TITLE

CRUCIBLE, FILTERING, LABORATORY (Gooch, Low Form)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON	e. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Defense Personnel Support Center ATTN: DPSC-MSE	(215)7372870	444-2870
c. ADDRESS (Include Zip Code) 2800 South 20th Street Philadelphia, PA 19145	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 — Previous editions are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:38Z
Check the source to verify that this is the current version before use.