INCH-POUND

MIL-DTL-14639/53B
4 February 2004
SUPERSEDING
MIL-DTL-14639/53A
8 April 2003

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, CHIEF WARRANT OFFICER CW5, MARINE CORPS, NAVY, AND ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-14639.

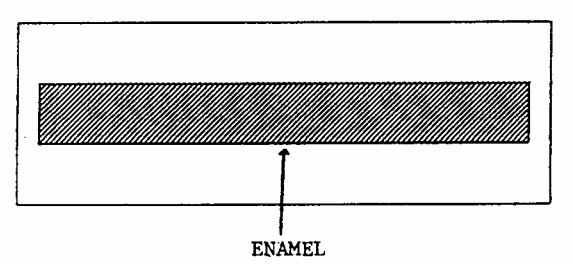

DASH NO.

-1: Regular size Marine Corps
-2: Miniature size Marine Corps
-3: Regular size Navy
-4: Miniature size Navy
-5: Regular size, full color, Army
-6: Regular size, subdued, Army

MATERIAL: Gilding Metal or Red Brass

FINISH:

-1 thru -4: Hard Enameled or Epoxied, Nickel Plated (Red Brass only), Rhodium Plated, Mirror-like Polished.
-5: Hard Enameled or Epoxied, Nickel Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
-6: Dull flat olive drab baked enamel finish with the area indicated (above) as enameled to be dull flat black baked enamel finish.

DIMENSIONS:

HEIGHT:
-1, -3, -5, & -6: 3/8 inch (REF)
-2 & -4: 1/4 inch (REF)
WIDTH:
-1, -3, -5, -6: 1-1/8 inches (REF)
-2 & -4: 3/4 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:12Z
Check the source to verify that this is the current version before use.

THICKNESS (at thickest point):
-1, -3, -5, -6: 0.065 ± 0.005 inch
-2 & -4: 0.065 ± 0.005 inch

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and the following distance apart.

-1.-3, -5, -6: 7/8 inch ± 1/64 inch
-2 & -4: 5/8 inch ± 1/64 inch.

3. Enamel/epoxied areas for full color insignia shall be as indicated. When hard enamel is used, the material requirement shall be for gilding metal. When epoxy is used, the material may be either gilding metal or red brass. Colors shall conform to TIOH Hard Enamel Color Chip Numbers listed below:

COLOR	CHIP NUMBER
Scarlet (-1 & -2 Marine Corps)	1
Ultramarine Blue (-3 & -4 Navy)	18
Black (-5, Full color, Army)	26

4. Baked enamel colors for the subdued Army insignia (-6) shall be olive green and black conforming to Chip Number 34096 and 37038 respectively of Fed-STD-595.

5. -1, -3, -5, & -6 shall be dapped on the horizontal plane to a 5 inch ± 1/64 inch radius.

6. Navy and Marine Corps insignia may be made from sterling silver for commercial sale and, if so, the thickness dimensions are for reference only. A minimum weight of 52 grains for -1 and -3 and 18 grains for -2 and -4 shall govern. The finish shall be mirror-like polished.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy – NU

Preparing activity:
Army - IH
(Project No. 8455-0135/003)

Review activities:
Navy - MC
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:12Z
Check the source to verify that this is the current version before use.