INCH-POUND
A-A-50454
24 January 1992

COMMERCIAL ITEM DESCRIPTION

*LAMP, INCANDESCENT, G-6,*
BAYONET CANDELABRA, DOUBLE CONTACT

The General Services Administration has authorized the use of this commercial item description as a replacement for MS15569 which is canceled.

Abstract. This commercial item description covers G-6 incandescent lamps with a bayonet candelabra base. These lamps can be identified by the industry numbers specified in the notes section herein.

Salient characteristics.

1. Physical.

| | |
|---|---|
| Bulb designation | G-6 |
| Bulb finish | (See lamp characteristics) |
| Base designation | Bayonet candelabra, double contact |
| Filament designation | (See lamp characteristics) |
| Light center length (distance from the center of the light source to the top of the base pins) | 13/16 inch |
| Dimensions | (See figure 1) |

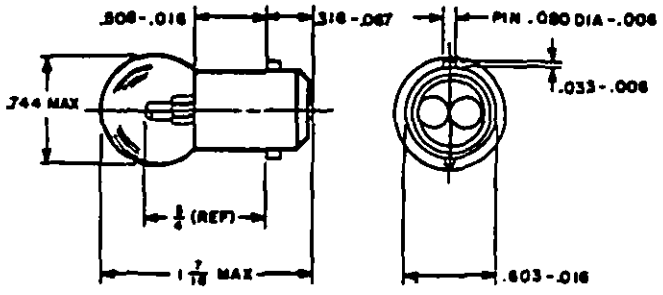



FIGURE 1. Lamp dimensions (inches).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: Commander, Naval Sea Systems Command, Attn: 55Z3, Washington, DC 20362-5101.

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T08:42Z
Check the source to verify that this is the current version before use.

2. Lamp characteristics.

| CID PART NUMBER | INDUSTRY NUMBER 1/ | CANDLE POWER 2/ | DESIGN VOLTS | DESIGN AMPS | FILA-MENT TYPE | AVG.S LIFE (HOURS) |
|---|---|---|---|---|---|---|
| A50454-1 | 64 | 3 ± 8% | 7.00 | 0.63 ± 5% | C-2R | 1000 |
| A50454-2 | 64R | 3 ± 8% | 7.00 | 0.63 ± 5% | C-2R | 1000 |
| A50454-3 | 82 | 6 ± 9% | 6.50 | 1.02 ± 5% | C-2R | 500 |
| A50454-4 | 90 | 6 ± 15% | 13.00 | 0.58 ± 8% | C-2R | 750 |
| A50454-5 | 90R | 6 ± 15% | 13.00 | 0.58 ± 8% | C-2R | 750 |
| A50454-6 | 68 | 4.0 | 13.50 | .59 | C-2R | 5000 |
| A50454-7 | 1252 | 3 | 28.00 | 0.23 | 2C-2V | 2000 |
| A50449-8 | 304 | 6 | 28.00 | 0.30 | C-2F | 500 |

1/ R designates a red bulb finish. Other lamps have a clear bulb finish.
2/ For lamps A50454-2 and A50454-5, candle power applies to lamp before red coating is applied.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes.

1. Ordering data. Purchaser should specify the following:

(a) Title, number, and date of this commercial item description.
(b) CID part number required (see salient characteristics).



Source: https://assist.dla.mil -- Downloaded: 202640-26T08:42Z
Check the source to verify that this is the currentversion before use.

2. Cross reference to specification-based part numbers.

| CID PART NUMBER | MS PART NUMBER | INDUSTRY NUMBER |
|---|---|---|
| A50454-1 | MS15569-1 | 64 |
| A50454-2 | MS15569-2 | 64R |
| A50454-3 | MS15569-3 | 82 |
| A50454-4 | MS15569-4 | 90 |
| A50454-5 | MS15569-5 | 90R |
| A50454-6 | MS15569-6 | 68 |
| A50454-7 | MS15569-7 | 1252 |
| A50454-8 | MS15569-8 | 304 |

MILITARY INTERESTS:

Custodians
Army - ME
Navy - SH
Air Force - 99

Review activities
Air Force - 82
DLA - GS

Preparing activity:
Navy - SH
(Project 6240-1264)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.