
MILITARY SPECIFICATION SHEET

POST, BINDING, ELECTRICAL, WATERPROOF (INSULATED),

TYPE PB07FA01

The complete requirements for procuring the binding posts described herein shall consist of this document and the latest issue of Specification MIL-P-55149.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense

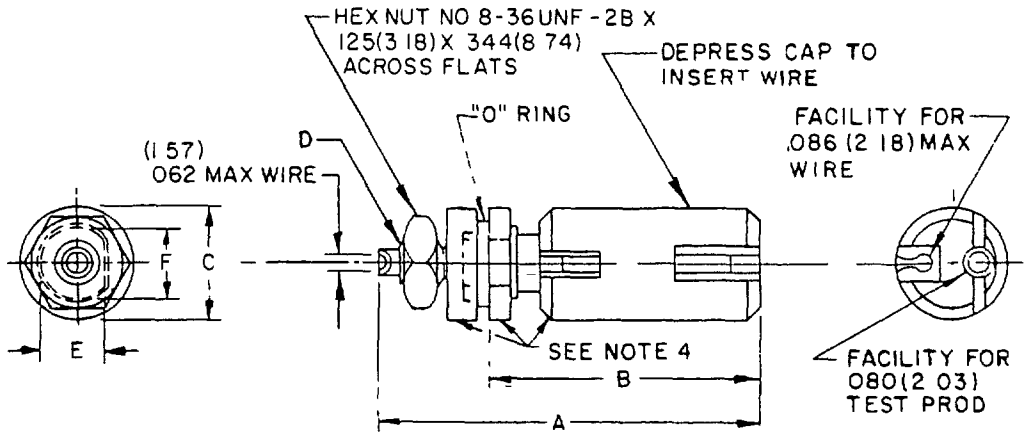

Type designation	Insulation color	Dimensions 1/ A (max)	B (max)	C (max dia)	D	E ± 001 (03)	F ± 002 (05)	Used on panel thickness (Reference information)
PB07FA01	Olive drab	1 612 (40 94)	1 072 (27 23)	400 (10 16)	8-36 UNF-2A	241 (6 12)	272 (6 91)	062 to 125 (1 57 to 3 18)

1/ Dimensions are in inches with metric equivalents (mm) in parentheses


NOTES
1. Dimensions are in inches
2. Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
3. Unless otherwise specified, tolerance is .xxx ± 015(38 mm).
4. This is insulated portion
5. Drawing exemplifies only general characteristics and is not intended to limit specific manufacturing processes. Type of insulated portion is optional

FIGURE 1 Type PB07FA01 binding post

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.

INCHES	MM
.245	6 22
249	6 32
.278	7.06
.282	7.16

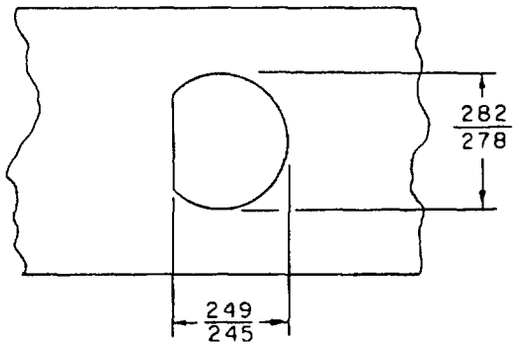

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 inch = 25 4 mm

FIGURE 2 Test-mount hole

REQUIREMENTS

Dimensions and configuration See figure 1

Metal finish Nickel plate

Finish of solder terminal end Tin coating applicable

Cap spring pressure 3 pounds minimum, 5 pounds maximum

Dielectric withstanding voltage

(a) Special preparations or conditions - Aluminum foil shall be wrapped around the sides and top of the cap, but not closer than 1/32 inch to the base of the side-wall, and not indented into any of the cap cavities (see figure 2).
(b) Magnitude of test voltage - 1, 000 Vac rms
(c) Points of application of test voltage - Between the test mount and the foil-covered cap which shall be grounded to the binding-post terminal

Solderability of solder terminal end Applicable

Contact resistance test Applicable.

Insulation resistance test Applicable

Conductor retention Method I

Panel seal test Applicable

Vibration test· Applicable.

Shock test Applicable

Cap retention test Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.

Custodians
Army - EL
Navy - EC
Air Force - 80

Review activities
Army - EL, MI, AT
Navy - AS
Air Force -
DSA - GS

User activities
Army - WC
Navy - OS SH MC
Air Force - 17

Preparing activity
Army - EL

Agent
DSA - ES

(Project 5940-0633)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Communications - Electronics Command
ATTN. DRSEL-ED-TO
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.