
FED. SUP CLASS
6640

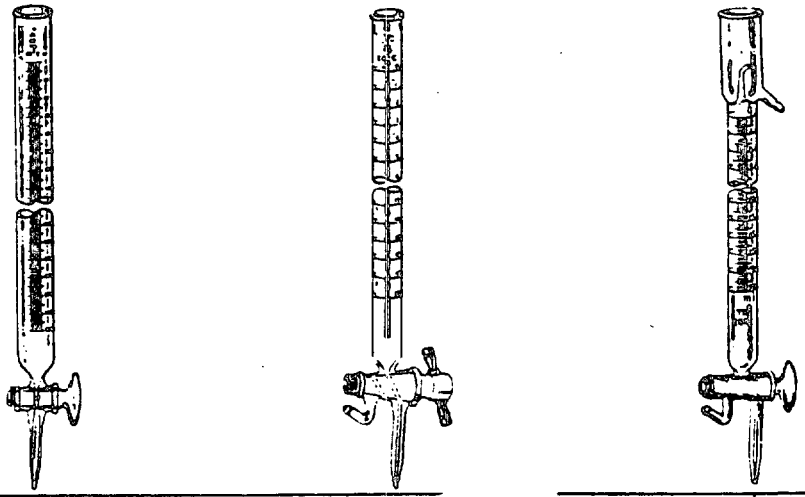

PART NUMBER	DESIGN	ITY	GRADUATED INTERVAL mL	NUMBERED INTERVALS mL
MS35971-1	D-	02	0.05	0.5
MS35971		03	0.1	1.0
		05	0.1	1.0
		1	0.01	0.1
		)	0.1	1.0
M.			0.05	0.5
M.			0.1	1.0
M.			0.1	1.0

CANCELLED
CANCELLED AFTER 9 OCT 1991
NO SUPERSEDING STANDARD

MAT. ...ordance with ASTM E438, Type ... in accordance with the above specifi- ...ylene in accordance with Federal Specification

DESIGN ... shall be cylindrical in shape with a straight bore and of a design as noted in the table. They shall be calibrated "to deliver" at 20°C. Graduation marks shall be permanently etched or fused. Stopcock and delivery tip shall be permanently attached to the buret. Each stopcock plug shall be provided with a retaining device to prevent accidental dislodging. Stopcock shall have a standard stopper number size 2 and provide a leakproof fit. MS35971-4 and MS35971-5 shall have a 3-way oblique bore stopcock and a turned back filling tube.

NOTES:

1. Protective dust cap is an optional feature.
2. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
3. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
4. Referenced documents shall be of the issue in effect on date of invitations for bid.
5. FSCM: 14674 and 84116.

© CANCELLATION

P.A.	EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	MS 99		BURET, STRAIGHT PRECISION	MS35971
Procurement Specifications	NNN-B-789	SUPERSEDES:	MS35975, MS35976, and MS35977	SHEET 1 OF 1

DD FORM 1426 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

CANCELLATION
Project Number 6640-1728-0

APPROVED 23 Dec 1959 REVISED (A) 14 July 1969 (B) 4 OCT 1983 (C) 9 OCT 1991

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REVIEWER ACTIVITIES: ARMY - MF
AIR FORCE - 82

USER ACTIVITIES: ARMY - MD, DM
NAVY - MS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-05-23T17:13:22Z
Check the source to verify that this is the current version before use.