
FED. SUP CLASS

6630

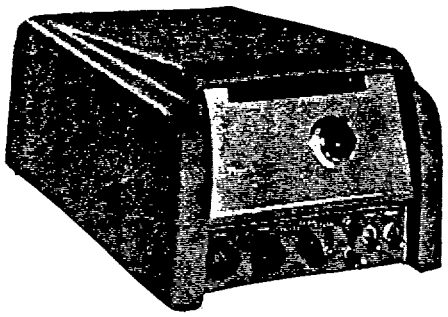

PART NUMBER	O/A DIMENSIONS (in.) H	W	D	WEIGHT (LBS)	ELECTRICAL VOLTS	Hz
MS36526-1	8	11	17	31	115	50-60

MATERIAL: Case shall be of cast aluminum with a chemical resistant finish. The analysis unit shall be corrosion-resistant, and the analysis cell shall be shock mounted.

DESIGN: The analyzer shall be a dual range instrument of the paramagnetic type, and shall have the following performance characteristics.

Ranges: Dual range including one overall range. Overall ranges available: 0 to 10% oxygen (O_2); 11 to 21% O_2; 0 to 25% O_2; 0 to 50% O_2; 0 to 100% O_2. Subrange to be selected with a span of no less than 1/10 the span of the overall range. (Percent figures assume total pressure of 760 mm Hg.)

Accuracy: PORM 0.5% of span on ranges from 5 to 90% O_2 with a minimum span of 5% O_2. PORM 1% of range span on range spans of less than 5% O_2, and between 90 to 100% O_2.

Sensitivity: PORM 0.1% of range span.

Reproducibility: PORM 0.3% of range span.

Response time: For flowing samples.
Standard - One minute.
Rapid response unit - 10 seconds.

Cell volume: Standard cell - 10 cm^3.
Static sample cell - 3 cm^3.

Required flow rates: Standard cell - 40 to 250 mL per minute.
Rapid response cell - 40 to 60 mL per minute.

Sample conditions: Gas, free of solids or liquids, with a temperature between 50° to 110°F (10° to 43°C).

Controls: Zero and span adjustment controls to compensate for barometric pressure changes and background gas changes.

Readout: Oxygen concentration readout from a dial, using a null-type circuit.

PURPOSE: To determine the percent by volume of oxygen in static or flowing gas samples.

NOTES:
1. Items differing from this Military Standard by minor variation in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.
2. FSCM: 05721.

ENTIRE STANDARD REVISED.

APPROVED 29 JUNE 1967 REVISED (A) 24 JUL 1986

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
EA		ANALYZER, OXYGEN, DUAL RANGE	MS36526
Other Cust MS 99			
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NUMBER 6630-0437-2

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved by the Department of the and shall be used by that activity. All other military activities are required to employ this standard where suitable.

REVIEWER ACTIVITIES: ARMY - AR, ME, MI USER ACTIVITIES: ARMY - ER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:42Z
Check the source to verify that this is the current version before use.