
FED. SUP CLASS
5935

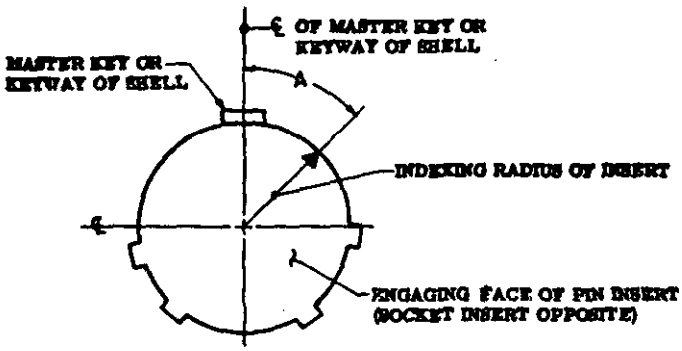

APPLICABLE CONNECTORS (REF)		
RECEPTACLES		PLUGS
MS3110	MS3128	MS3116
MS3111	MS3440	MS3126
MS3112	MS3442	MS3475
MS3113	MS3443	MS3476
MS3114	MS3449	
MS3115	MS3470	
MS3119	MS3471	
MS3120	MS3472	
MS3121	MS3473	
MS3122	MS3474	
MS3124	MS3477	
MS3127	MS3479	

(F)

NOTES:

(F) 1. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH USASI Y 14.5 - 1966 (ANSI). DIMENSIONS IN INCHES.

(F) 2. DIMENSIONS LOCATING CONTACTS AND INSERTS ARE TRUE POSITION. FOLLOWING TOLERANCES APPLY TO INSERT INSTALLED IN SHELL:

(A) CENTER OF EACH HOLE IN INSERT SHALL BE LOCATED AT TRUE POSITION WITHIN .010 DIA.

(B) CENTER OF ENGAGING END OF EACH CONTACT SHALL BE LOCATED AT TRUE POSITION WITHIN .012 DIA.

3. DIMENSIONS AND MARKINGS SHOWN ARE FOR ENGAGING FACE OF PIN INSERT (SOCKET INSERT OPPOSITE).

4. UNLESS OTHERWISE INDICATED, DIMENSIONS ARE SYMMETRICAL ABOUT CENTERLINES.

5. EACH INSERT ARRANGEMENT IS SHOWN IN ITS NORMAL POSITION IN THE SHELL.

6. IN NORMAL POSITION, THE INDEXING RADIUS COINCIDES WITH ℄ OF THE MASTER KEY OR KEYWAY OF SHELL.

7. IN ALTERNATE POSITIONS THE PIN INSERT IS ROTATED CLOCKWISE SO THAT ANGLE "A" BETWEEN THE INDEXING RADIUS AND THE ℄ OF THE MASTER KEY OR KEYWAY OF SHELL IS AS REQUIRED.

8. IN ALTERNATE POSITIONS THE SOCKET INSERT IS ROTATED COUNTERCLOCKWISE SO THAT ANGLE "A" BETWEEN THE INDEXING RADIUS AND THE ℄ OF THE MASTER KEY OR KEYWAY OF SHELL IS AS REQUIRED.

CANCELLED AFTER 25 APRIL 1978
SUPERSEDED BY MIL-STD-1669.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(G) CANCELLED

REVIEW ACTIVITIES:
NAVY - EC

APPROVED 14 MAY 59 — REVISED (A) 26 FEB 61 (B) 24 AUG 62 (C) 1 NOV 65 (D) 11 AUG 67 (E) 1 APR 71 (F) 27 MAR 74 (G) 25 APR 78

This military standard is approved by the Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE INSERT ARRANGMENTS, ELECTRIC CONNECTOR, BAYONET COUPLING, SHELL SIZE 8	MILITARY STANDARD MS33708 (NAVY)
PROCUREMENT SPECIFICATION MIL-C-26482	SUPERSEDES:	SHEET 1 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.

DD FORM 672-1 (SUPERSEDES PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.)

PLATE NO. 17709
PROJECT NO. 5935-N857-1