

FED. SUP CLASS
6640

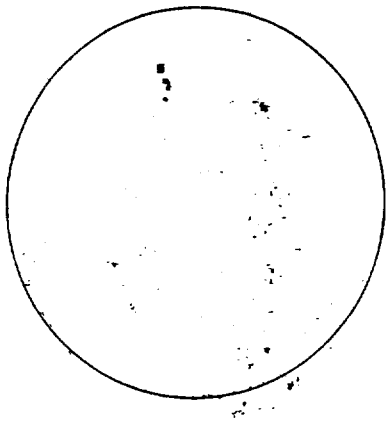

MS36320-1

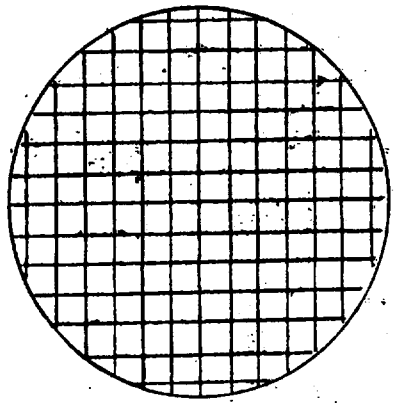

MS36320-2
& MS36320-3

PART NUMBER	PORE SIZE microns	DIAMETER millimeters	THICKNESS microns	TYPE	MARKING	COLOR
MS36320-1	0.80 ± 0.05	13	150 ± 10	Aerosol	Plain	White
MS36320-2	0.80 ± 0.05	47	150 ± 10	Hydrosol	Grid	White
MS36320-3	0.45 ± 0.02	47	150 ± 10	Hydrosol	Grid	White

MATERIAL: Filtering disks shall be fabricated from a cellulose ester polymer having a refractive index of 1.49 to 1.51.

DESIGN: The grid design imprinted on MS36320-2 and MS36320-3 shall subdivide the effective filtering surface into 100 squares.

NOTE: 1. An absorbent pad shall be provided with MS36320-2 and MS36320-3 disks.

APPROVED 28 JUN 1963 REVISED

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved for use by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MU	TITLE	MILITARY STANDARD
Other Cust BuMed MAA	DISK, BACTERIAL FILTERING, MICROPOROUS	MS36320
Procurement Specification None	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:38Z
Check the source to verify that this is the current version before use.