
MILITARY SPECIFICATION SHEET

POWER DIVIDERS, QUADRATURE, FLAT PACK

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the power dividers described herein shall consist of this document and the latest issue of specification MIL-P-23971.

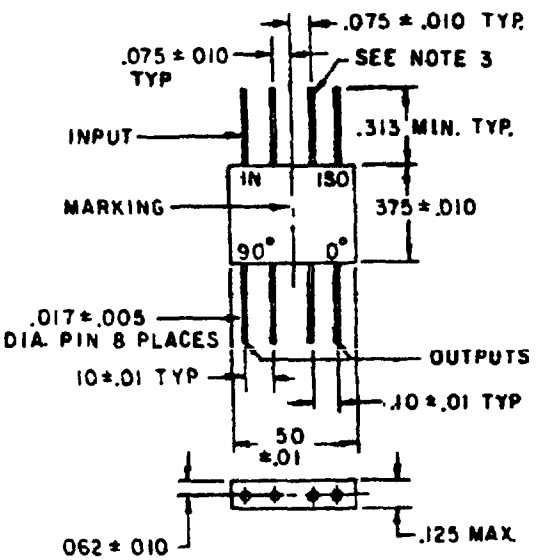


INCHES	MM
.005	.13
.01	.3
.017	.43
.062	1.57
.075	1.90
.10	2.5
.125	3.18
.313	7.95
.375	9.52
.50	12.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Pins that are not marked, are grounded to the internal circuit of the power divider, by the manufacturer

FIGURE 1. Dimensions and configuration, dash number 01.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

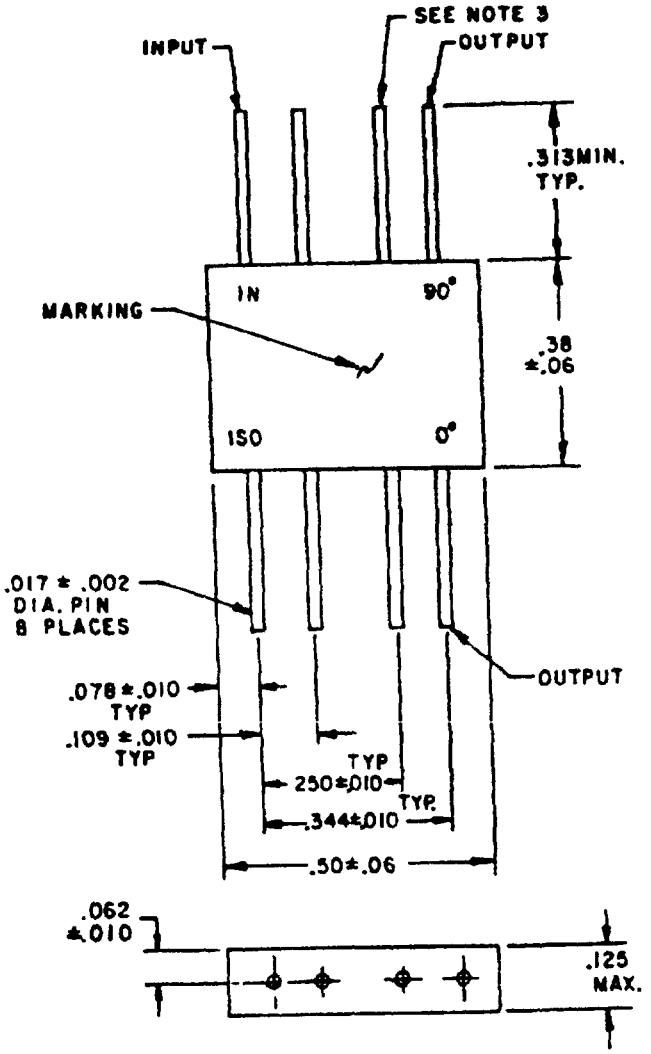

INCHES	MM
.002	.05
.010	.25
.017	.43
.06	1.5
.062	1.57
.078	1.98
.109	2.77
.125	3.18
.250	6.35
.313	7.95
.344	8 74
.38	9.7
.50	12.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Pins not marked are grounded to the internal circuit of the power divider, by the manufacturer.

FIGURE 2. Dimensions and configuration, dash number 02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

TABLE I Electrical performance characteristics and physical requirements

M23971/8	Impedance (ohms)	Frequency range (MHz)	Average coupling (dB)	VSWR max	Insertion loss max (dB)	Isolation min (dB)	Phase balance max (degree)	Amplitued balance (dB) max	Power level pk (W)	Weight pounds (grams)	Ambient temperature		Figure
											Operating	Storage	
01	50	7 14	3 + 2 − 0	1 2.1	0 5	25	±2 0	±0 75	1/	-	−54° to +125°C	−54° to +125°C	1
02	50	40-80	3 + 2 − 0	1 2 1	0 5	20	±3 0	±0 75	2/	062 (28 1)	−55° to +85°C	−55° to +85°C	2

1/ Power level 5 watts to +100°C, derated linearly to 1 watt at +125°C
2/ Power level 5 watts at +25°C, derated linearly to 1 watt at +85°C

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Design and construction: See figures 1 and 2.

Case. Hermetically sealed.

Material: Cold rolled steel 1010
Finish: Gold plated per Mil-G-45204, type I, class 1.

Cover:
Material: Cold rolled steel 1010.

Finish:
Dash number 01. Gold plated per MIL-G-45204, type I, class 1.
Dash number 02: Plated electroless nickel per MIL-C-26074, class 1, .00012 inch thick.

Terminals:
Dash number 01: Dumet or Kovar, gold plated per MIL-G-45204.
Dash number 02: Input and output leads: Dumet, type D, per MIL-STD-1276.
Dash number 02: Ground leads: No. 52 alloy, type F, per MIL-STD-1276.

Electrical characteristics: See table I

Weight: See table I

Ambient temperature: See table I

Environmental tests: In accordance with MIL-P-23971 except

Dash number 01.
Seal: In accordance with method 112 of MIL-STD-202, test condition C, procedure IIIa, followed by gross leak in accordance with test condition B

Thermal shock: In accordance with method 107 of MIL-STD-202, test condition B for 10 cycles.

Shock. In accordance with method 213 of MIL-STD-202, test condition I.

Part number: M23971/8- (dash number from table I).

NOTE: Power dividers covered by this specification sheet are substituted for the following manufacturer's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	94987 32252	147546-1 FP-J4-100-10	
02	05869 21912 49956	723141-1 JH-115 954428-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army -
Navy -
Air Force -
DLA - ES

User activities:
Army -
Navy - AS, OS, MC
Air Force -

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0894)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command (ELEX 8111)
Washington, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:34Z
Check the source to verify that this is the current version before use.