
FED. SUP CLASS
5315

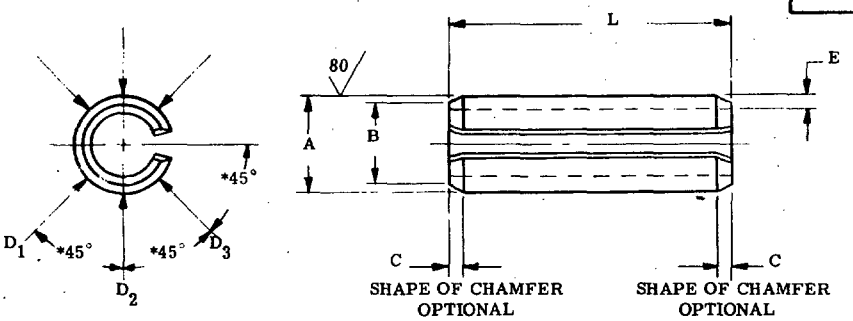

*APPROX

A			B	C		E	RECOMMENDED HOLE SIZE		APPROX WEIGHT LBS PER 100
NOMINAL	MAXIMUM (GO RING GAGE)	MIN AVERAGE DIA $(D_1+D_2+D_3)1/3$	MAX	MIN	MAX	STOCK THICKNESS	MIN	MAX	
.062	.069	.066	.059	.007	.028	.012	.062	.065	L x .049
.078	.086	.083	.075	.008	.032	.018	.078	.081	L x .092
.094	.103	.099	.091	.008	.038	.022	.094	.097	L x .140
.125	.135	.131	.122	.008	.044	.028	.125	.129	L x .240
.156	.167	.162	.151	.010	.048	.032	.156	.160	L x .340
.188	.199	.194	.182	.011	.055	.040	.187	.192	L x .510
.219	.232	.226	.214	.011	.065	.048	.219	.224	L x .700
.250	.264	.258	.245	.012	.065	.048	.250	.256	L x .850
.312	.328	.321	.306	.014	.080	.062	.312	.318	L x 1.30
.375	.392	.385	.368	.016	.095	.077	.375	.382	L x 1.99
.438	.456	.448	.430	.017	.095	.077	.437	.445	L x 2.40
.500	.521	.513	.485	.025	.110	.094	.500	.510	L x 3.20

MATERIAL: STEEL - AMS5120 OR AMS5121
FINISH: CADMIUM PLATE AMS 2400-2
SURFACE ROUGHNESS: AS291
MANUFACTURING SPECIFICATION: AMS 7205
BREAK SHARP EDGES: .003-.015 UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES
SEE SHEET 2 FOR PART NUMBER

(A) CANCELED AFTER 3 NOV 80 USE MS171401 THRU MS171900. INTERCHANGEABILITY RELATIONSHIP: MS171401 THRU MS171900 ITEMS CAN REPLACE THE CANCELED MS9048 ITEMS. THE CANCELED MS9048 ITEMS SHOULD BE USED FOR REPLACEMENT PURPOSES UNTIL EXISTING STOCK IS DEPLETED. USE THE SUPERSEDING MS ITEMS FOR DESIGN.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE. (A) Denotes Changes

APPROVED 10 AUG 56 REVISED (A) 3 NOV 80

User activities:

Review activities:
ARMY - AR, ME, MI
DLA - IS
NS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. 11	TITLE	MILITARY STANDARD
Other Cust AS	PIN - SPRING, STEEL, CADMIUM PLATED	MS9048
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5315-0316 PLATE NO 23065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:09Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Review activities:
ARMY - AR, ME, MI
DLA - IS
NS

User activities:

DD FORM 1 MAR 72 672-1 (Coordinated)

PROCUREMENT SPECIFICATION: NONE

P.A. 11
Other Cust AS

SUPERSEDES:

TITLE
PIN - SPRING, STEEL, CADMIUM PLATED

MILITARY STANDARD
MS9048
SHEET 2 OF 2

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5315-0316

PLATE NO. 23065

LENGTH L	NOMINAL DIAMETER											
	.062	.078	.094	.125	.156	.188	.219	.250	.312	.375	.438	.500
.188 ±.015	MS9048-002											
.250 ±.015	MS9048-003	MS9048-034	MS9048-065	MS9048-096								
.312 ±.015	MS9048-004	MS9048-035	MS9048-066	MS9048-097	MS9048-128	MS9048-159						
.375 ±.015	MS9048-005	MS9048-036	MS9048-067	MS9048-098	MS9048-129	MS9048-160	MS9048-191	MS9048-222				
.438 ±.015	MS9048-006	MS9048-037	MS9048-068	MS9048-099	MS9048-130	MS9048-161	MS9048-192	MS9048-223				
.500 ±.015	MS9048-007	MS9048-038	MS9048-069	MS9048-100	MS9048-131	MS9048-162	MS9048-193	MS9048-224				
.562 ±.015	MS9048-008	MS9048-039	MS9048-070	MS9048-101	MS9048-132	MS9048-163	MS9048-194	MS9048-225	MS9048-256	MS9048-287		
.625 ±.015	MS9048-009	MS9048-040	MS9048-071	MS9048-102	MS9048-133	MS9048-164	MS9048-195	MS9048-226	MS9048-257	MS9048-288		
.688 ±.015	MS9048-010	MS9048-041	MS9048-072	MS9048-103	MS9048-134	MS9048-165	MS9048-196	MS9048-227	MS9048-258	MS9048-289		
.750 ±.015	MS9048-011	MS9048-042	MS9048-073	MS9048-104	MS9048-135	MS9048-166	MS9048-197	MS9048-228	MS9048-259	MS9048-290		
.812 ±.015	MS9048-012	MS9048-043	MS9048-074	MS9048-105	MS9048-136	MS9048-167	MS9048-198	MS9048-229	MS9048-260	MS9048-291		
.875 ±.015	MS9048-013	MS9048-044	MS9048-075	MS9048-106	MS9048-137	MS9048-168	MS9048-199	MS9048-230	MS9048-261	MS9048-292		
.938 ±.015	MS9048-014	MS9048-045	MS9048-076	MS9048-107	MS9048-138	MS9048-169	MS9048-200	MS9048-231	MS9048-262	MS9048-293		
1.000 ±.015	MS9048-015	MS9048-046	MS9048-077	MS9048-108	MS9048-139	MS9048-170	MS9048-201	MS9048-232	MS9048-263	MS9048-294	MS9048-325	
1.125 ±.020	MS9048-016	MS9048-047	MS9048-078	MS9048-109	MS9048-140	MS9048-171	MS9048-202	MS9048-233	MS9048-264	MS9048-295	MS9048-326	
1.250 ±.020		MS9048-048	MS9048-079	MS9048-110	MS9048-141	MS9048-172	MS9048-203	MS9048-234	MS9048-265	MS9048-296	MS9048-327	MS9048-358
1.375 ±.020		MS9048-049	MS9048-080	MS9048-111	MS9048-142	MS9048-173	MS9048-204	MS9048-235	MS9048-266	MS9048-297	MS9048-328	MS9048-359
1.500 ±.020		MS9048-050	MS9048-081	MS9048-112	MS9048-143	MS9048-174	MS9048-205	MS9048-236	MS9048-267	MS9048-298	MS9048-329	MS9048-360
1.625 ±.020		MS9048-051	MS9048-082	MS9048-113	MS9048-144	MS9048-175	MS9048-206	MS9048-237	MS9048-268	MS9048-299	MS9048-330	MS9048-361
1.750 ±.020		MS9048-052	MS9048-083	MS9048-114	MS9048-145	MS9048-176	MS9048-207	MS9048-238	MS9048-269	MS9048-300	MS9048-331	MS9048-362
1.875 ±.020		MS9048-053	MS9048-084	MS9048-115	MS9048-146	MS9048-177	MS9048-208	MS9048-239	MS9048-270	MS9048-301	MS9048-332	MS9048-363
2.000 ±.020		MS9048-054	MS9048-085	MS9048-116	MS9048-147	MS9048-178	MS9048-209	MS9048-240	MS9048-271	MS9048-302	MS9048-333	MS9048-364
2.250 ±.025					MS9048-148	MS9048-179	MS9048-210	MS9048-241	MS9048-272	MS9048-303	MS9048-334	MS9048-365
2.500 ±.025					MS9048-149	MS9048-180	MS9048-211	MS9048-242	MS9048-273	MS9048-304	MS9048-335	MS9048-366
2.750 ±.025						MS9048-181	MS9048-212	MS9048-243	MS9048-274	MS9048-305	MS9048-336	MS9048-367
3.000 ±.025						MS9048-182	MS9048-213	MS9048-244	MS9048-275	MS9048-306	MS9048-337	MS9048-368
3.250 ±.030						MS9048-183	MS9048-214	MS9048-245	MS9048-276	MS9048-307	MS9048-338	MS9048-369
3.500 ±.030						MS9048-184	MS9048-215	MS9048-246	MS9048-277	MS9048-308	MS9048-339	MS9048-370
3.750 ±.030									MS9048-278	MS9048-309	MS9048-340	MS9048-371
4.000 ±.030									MS9048-279	MS9048-310	MS9048-341	MS9048-372

PART NUMBERS WITHIN ENVELOPE ARE THOSE NORMALLY CARRIED IN STOCK BY INDUSTRY, AVAILABILITY OF PART NUMBERS OUTSIDE THE ENVELOPE SHOULD BE CHECKED BEFORE SPECIFYING. LENGTHS AND DIAMETERS FOR PART NUMBERS NOT SHOWN ARE MANUFACTURED TO SPECIAL ORDER.

DO NOT USE UNASSIGNED PART NUMBERS.

FED. SUP CLASS 5315

APPROVED 10 AUG 56

(A) SEE SHEET 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:09Z
Check the source to verify that this is the current version before use.