NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

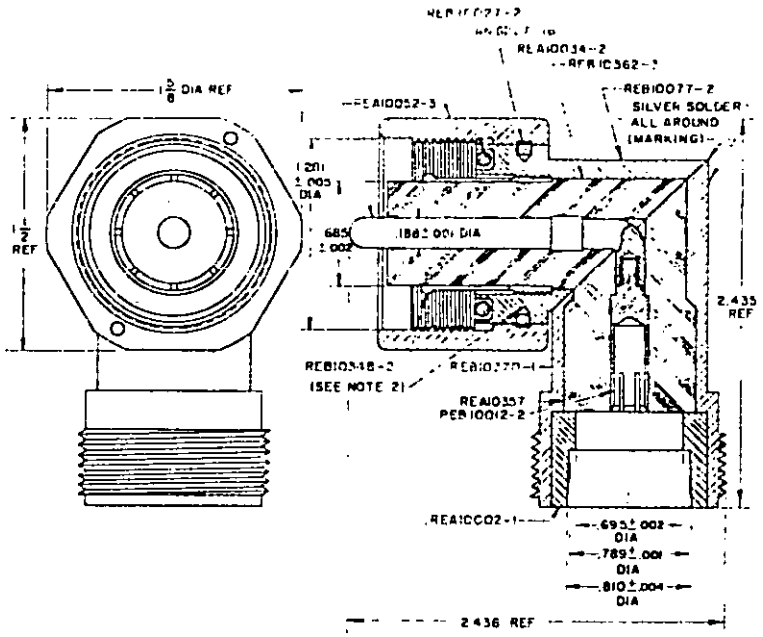

MS PART NO. MS91596-216B

BUREAU OF SHIPS DRAWING NO. OR AN PART NO.	DESCRIPTION	QUANTITY
REA10002-1	Bushing	1
REE10012-2	Contact	1
REB10027-2	Coupling nut	1
REA10034-2	Spring	1
REA10052-3	Contact	1
REB10077-2	Body	1
REB10348-2	Contact	1
REA10357	Insulator	1
REB10362-3	Insulator	1
REB10370-1	Body	1
AN6227-16	O ring	1

NOTES:
1. All dimensions in inches.
2. Stake to threads in four equally-spaced places.
3. Press-fit bushing REA10002-1 into body REB10370-1.
4. The dielectric withstanding test voltage shall be 5,000 volts root mean square.
5. Adapter UG-216B/U replaces adapters UG-216/U and -216A/U.
6. The MS part number consists of the MS military-standard number followed by a dash number. The dash number "216B" is derived from assigned nomenclature.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

ENGINEERING DATA: WEATHERPROOF, RADIOFREQUENCY, COAXIAL CONNECTOR ADAPTER; NOMINAL IMPEDANCE, 50 OHMS; RATED AT 5,000 VOLTS, PEAK; PRACTICAL FREQUENCY LIMIT, 1,000 MC/SEC; CONNECTS PLUG UG-154A/U, OR EQUAL, TO RECEPTACLE UG-352B/U, OR EQUAL.

(B) ENTIRE STANDARD REVISED (Project 5935-0102)

APPROVED 21 Sept. 1954 REVISED (A) 8 Apr. 1955 (B) 2 Dec. 1960

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Ships Other Cust SigC USAF	TITLE ADAPTER, CONNECTOR, SERIES UC, UG-216B/U	MILITARY STANDARD MS91596
PROCUREMENT SPECIFICATION MIL-C-3650	SUPERSEDES	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:43Z
Check the source to verify that this is the current version before use.