
MILITARY SPECIFICATION SHEET

SWITCH CAPSULE, DRY REED TYPE, SPST (NO), 1/4 AMPERE, OFFSET GAP

The complete requirements for procuring the switch capsule described herein shall consist of this document and the latest issue of Specification MIL-S-55433.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

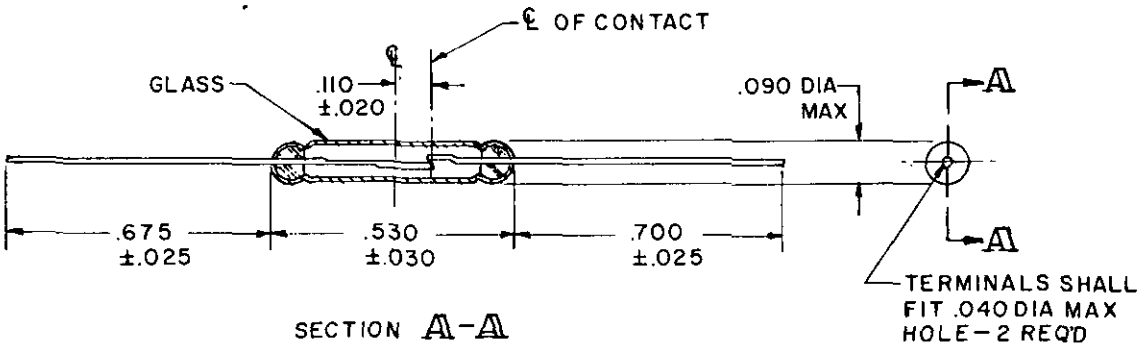

SECTION A-A



INCHES	MM
.020	.51
.025	.64
.030	.76
.040	1.02
.090	2.29
.110	2.79
.530	13.46
.675	17.15
.700	17.78

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

REQUIREMENTS:

Contact resistance: 200 milliohms maximum initial. 2 ohms maximum after life.

Operate and release ampere-turns:
Operate - 35 ± 1·5 NI.
Release - 30 to 75 percent of operate.

Contact bounce: 300 microseconds, maximum.

Operate and release time: 1 millisecond, maximum.

Mechanical resonance: 2, 700 Hz.

Operating temperature range: -55° to +125°C.

Dielectric withstanding voltage: 250 volts ac.

Terminal strength: Applied force - 2 pounds.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.

Load life: See table I.

TABLE I. Load life.

Load current Amperes dc	Millions of operations	
	Resistive	
	28v	6v
0.250 (high level)	10	15
0.030 (high level)	50	50
0.010 (low level)	50 at 50 mv	

The loads to be used for life test and the number for each test load shall be as follows:

0.250 amperes, 28v, resistive - 10 sample units
0.030 amperes, 28v, resistive - 5 sample units
0.030 amperes, 6v, resistive - 5 sample units
0.010 amperes, 50 mv, resistive- 10 sample units

The values shown were measured with the contact center at the midpoint of the test coil.

Application: Bending of terminals will increase ampere-turns based on type and location of the bend.

Part number: M55433/5-001.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MU
Navy - EC
Air Force - 11, 17, 85
DSA - ES

User activities:
Army-
Navy - CG
Air Force - 19

Preparing activity:
Army - EL

(Project 5930-0585)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.