
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE; BANANA RECEPTACLE, SINGLE TEST POINT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-39024.

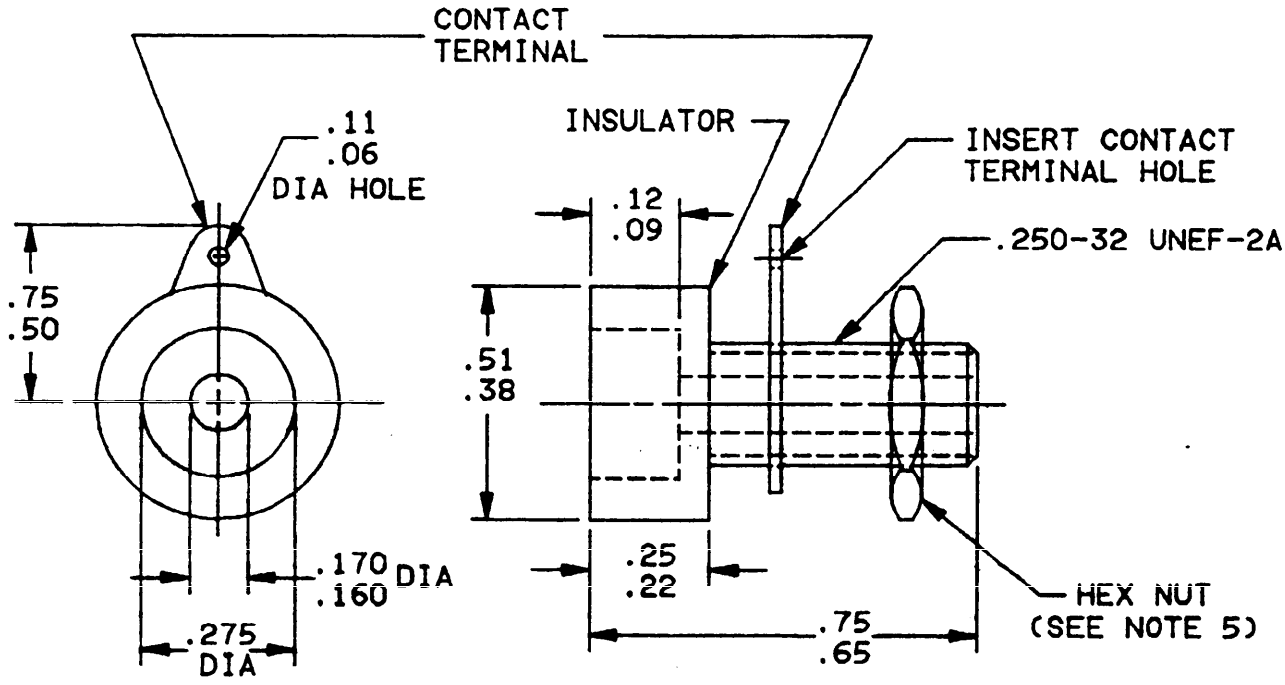

INCHES	MM	INCHES	MM
.06	1.5	.250	6.4
.09	2.3	.275	7.0
.11	2.8	.38	9.7
.12	3.0	.50	12.7
.160	4.0	.51	13.0
.170	4.3	.65	16.6
.22	5.6	.75	19.1

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010 (.25 mm).
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. All undimensioned pictorial configurations are for reference purposes only.
5. Hex nut .37 (9.4 mm) ±.005 (.13 mm) across flats x .09 (2.3 mm) ±.03 (.8 mm) thick.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:27Z
Check the source to verify that this is the current version before use.

FSC 5935

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.
Test probe: .170 ± 0.10 inch in diameter and .4375 inch (minimum) length.
Insulator (plastic parts): Nylon per L-P-410 or thermoset per MIL-M-14.

Contact current rating: 5 amperes (maximum).

Dielectric withstanding voltage (at sea level): 750 volts rms, 60 hertz

Insertion and withdrawal forces:

Insertion force: 5.0 pounds, maximum.

Withdrawal force: 0.5 pounds, minimum.

Part number: M39024/19- (dash number from table I).

OPERATING NOTES:

Maximum thickness of panel on which these connectors may be used is 0.234 inch.

Mating connector: Shall mate with a banana plug per MIL-C-28901.

TABLE I. Dash numbers.

Dash number	Insulation		Dash number	Insulation	
	Color	Number per FED-STD-595		Color	Number per FED-STD-595
-01	White	17875	-04	Green	14110
-02	Red	11105	-05	Blue	15123
-03	Black	17038	-06	Yellow	13655

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - EA, ME
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, CG, MC, OS, SH, YD
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3185-2)

★ U.S. GOVERNMENT PRINTING OFFICE: 1982—505-002/2171 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:27Z
Check the source to verify that this is the current version before use.