

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


NOTE: This drawing was approved by joint action of the War and Navy Departments as the Army-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

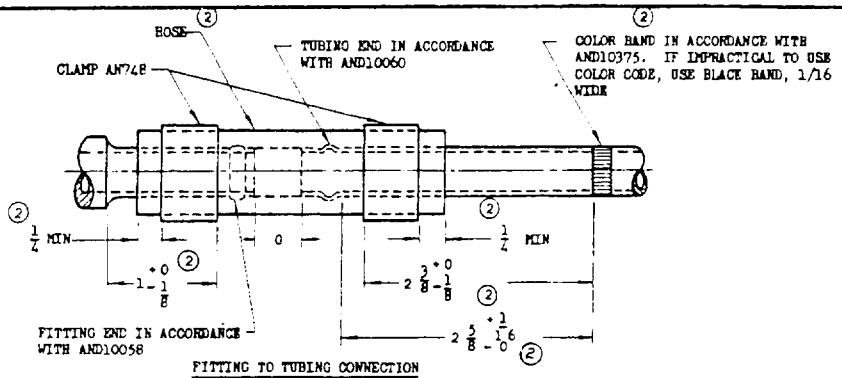

FITTING TO TUBING CONNECTION

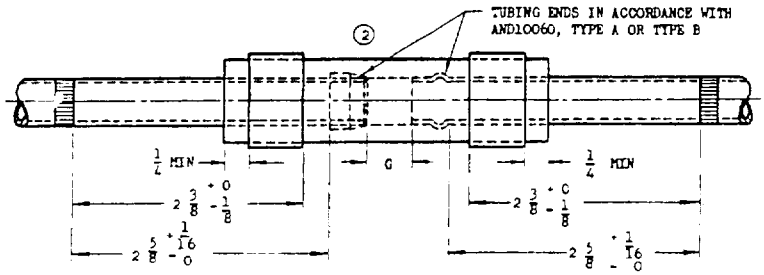


TUBING TO TUBING CONNECTION

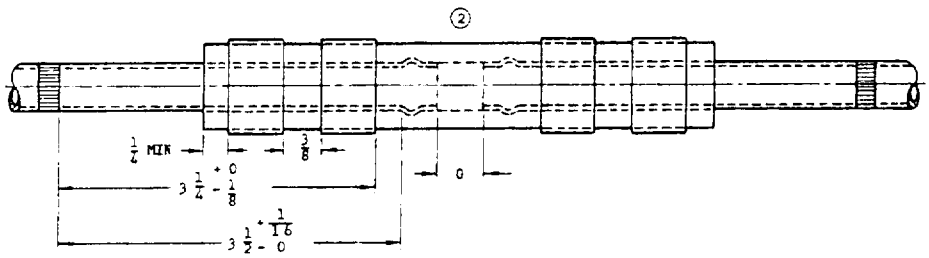

USE OF DOUBLE HOSE CLAMPS PERMITTED ONLY WITH THE SPECIFIC APPROVAL OF THE AIR TECHNICAL SERVICE COMMAND OR BUREAU OF AERONAUTICS AS APPLICABLE.

TUBING TO TUBING CONNECTION USING DOUBLE HOSE CLAMPS



MINIMUM GAP "G" SHALL BE 1/2 INCH OR $\frac{\text{TUBING OD}}{4}$, WHICHEVER IS GREATER.

MAXIMUM GAP "G" IS NOT LIMITED EXCEPT ON SUCTION LINES USING OTHER THAN SELF-SEALING HOSE. ON SUCH SUCTION LINES, MAX G SHALL BE 1-1/2 INCH OR ONE TUBE DIA, WHICHEVER IS GREATER.

(2)

AID FOR DETERMINING HOSE LENGTH

CONNECTION	HOSE OVER FITTING	GAP G	HOSE OVER TUBING (ONE END)	TOTAL HOSE LENGTH
FITTING TO TUBING CONNECTION	1-3/8	ACTUAL GAP	1-1/2	2-7/8 + GAP
TUBING TO TUBING CONNECTION		ACTUAL GAP	1-1/2	3 + GAP
TUBING TO TUBING CONNECTION USING DOUBLE HOSE CLAMPS		ACTUAL GAP	2-1/2 APPROX	5 + GAP

DIMENSIONS IN INCHES.

APPROVED 3 Nov 41 REVISED (1) 22 Aug 44 (2) 26 Mar 46

ARMY-NAVY AERONAUTICAL DESIGN STANDARD

CONNECTION ASSEMBLY-FLEXIBLE, FLUID, STANDARD DESIGN OF

AND 10065

NOT A PART NUMBER

SUPERSEDES AAF DWG 39A2397

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.