
NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
1660

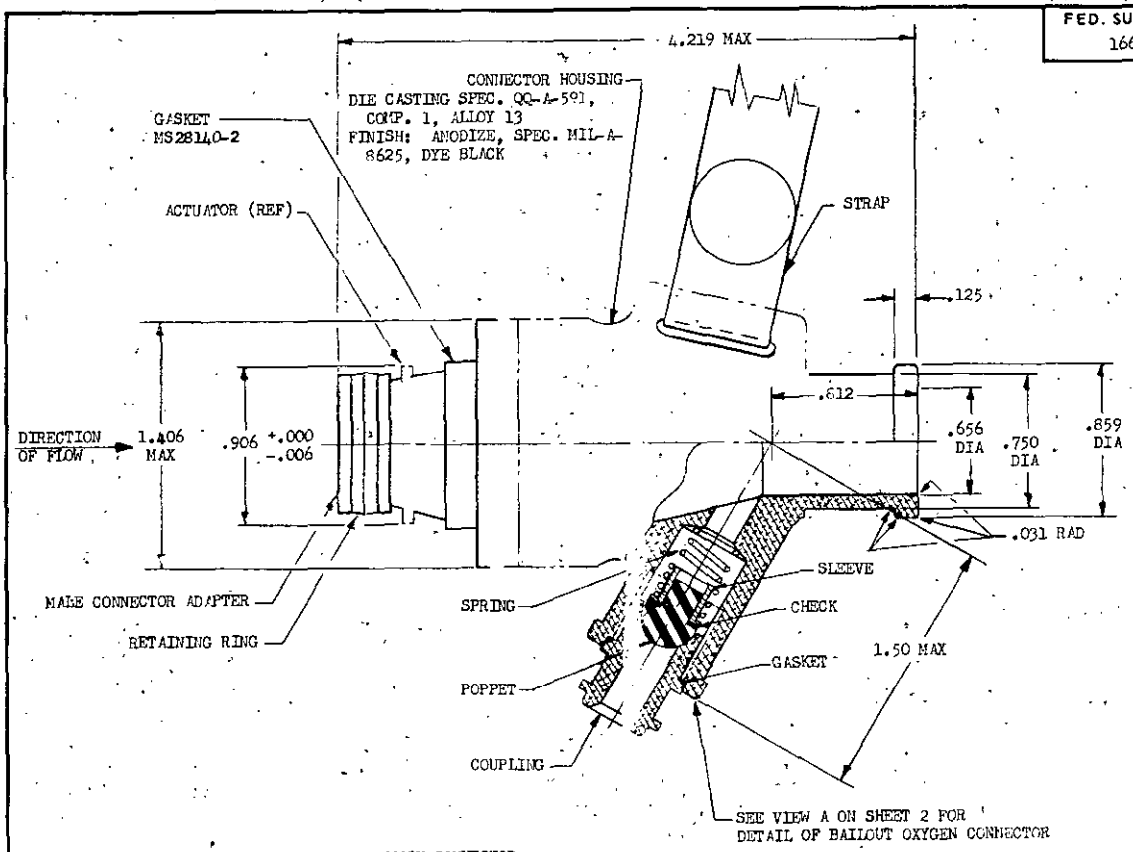

OXYGEN MASK CONNECTOR

MS PART NO.	FIIN	ITEM
MS28140-1		CONNECTOR
MS28140-2		GASKET

RESTRICTOR CONNECTOR SHALL INCORPORATE A TINNERMAN LOCK NUT OR EQUIVALENT TO PREVENT RESTRICTOR CONNECTOR FROM BEING JARRED OUT OF ACTUATOR. THE BAILOUT COUPLING SHALL BE TIGHTENED TO THE CONNECTOR HOUSING WITH A TORQUE OF 45 ± 5 INCH LBS.
GASKET MATERIAL AT BAILOUT CONNECTOR SHALL BE SUITABLE TO COMPLY TO THE FOLLOWING REQUIREMENTS:
(a) THERE SHALL BE NO LEAKAGE AT THE BAILOUT CONNECTOR BETWEEN THE COUPLING AND THE CONNECTOR HOUSING WHEN SUBJECTED TO AN INTERNAL PRESSURE OF 1.0 PSI.
(b) THE GASKET MATERIAL SHALL ALLOW A TORQUE OF 45 ± 5 INCH LBS. TO BE MAINTAINED BETWEEN THIS COUPLING AND THE CONNECTOR HOUSING.

REMOVE ALL BURRS AND SHARP EDGES
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES: FRACTIONS ± 1/64, DECIMALS ±.005, ANGLES ± 1/2°
THDS TO BE IN ACCORDANCE WITH SPECIFICATION MIL-S-7742

④CANCELLED. EFFECTIVE 1SEPTEMBER 1965. USE MS22016 (ASG)

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 25 SEPT 1960 REVISED Ⓐ 1 Sept 1965

P.A. Navy-Wep Other Cust	TITLE CONNECTOR, OXYGEN MASK TO REGULATOR, TYPE MC-3A	MILITARY STANDARD MS28140(WEP)
PROCUREMENT SPECIFICATION MIL-C-19246	SUPERSEDES:	SHEET 1 OF 3


DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.


FED. SUP CLASS
1660

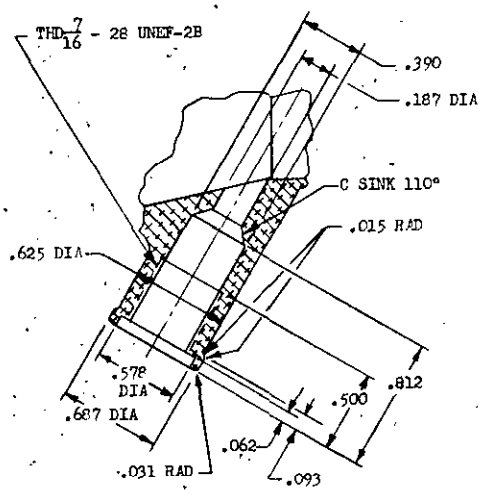

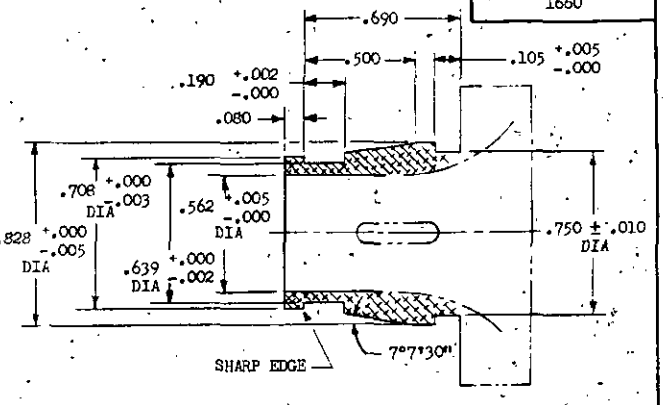


MALE CONNECTOR ADAPTER
MATERIAL: ALUM ROD, SPEC. QQ-A-365a, COMP. A, TEMPER T3
FINISH: ANODIZE SPEC. MIL-A-8625, TYPE II, RED


VIEW A

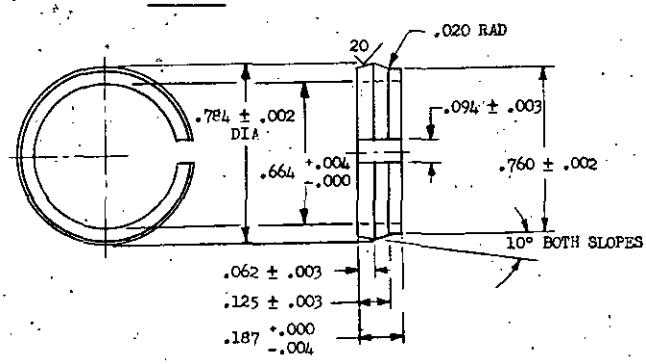


RETAINING RING
MATERIAL: STEEL, COLD ROLLED SAE 1095
FINISH: CHROME PLATE, SPEC. QQ-C-320, CLASS 2, TYPE I

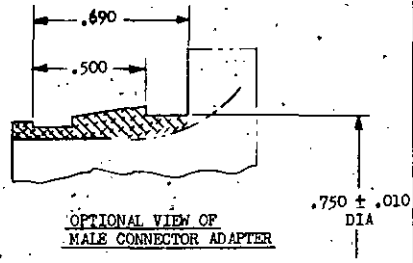

OPTIONAL VIEW OF
MALE CONNECTOR ADAPTER

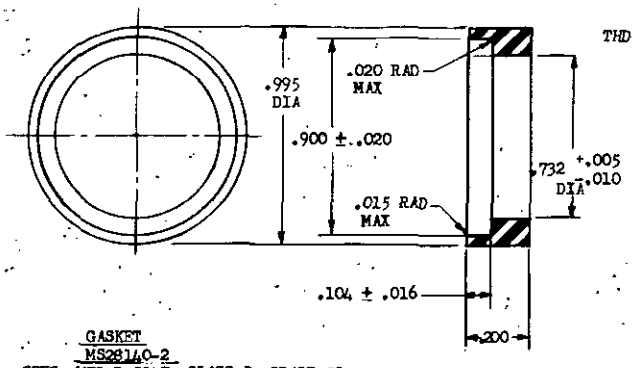

GASKET
MS28140-2
SPEC. MIL-R-5847, CLASS I, GRADE 50

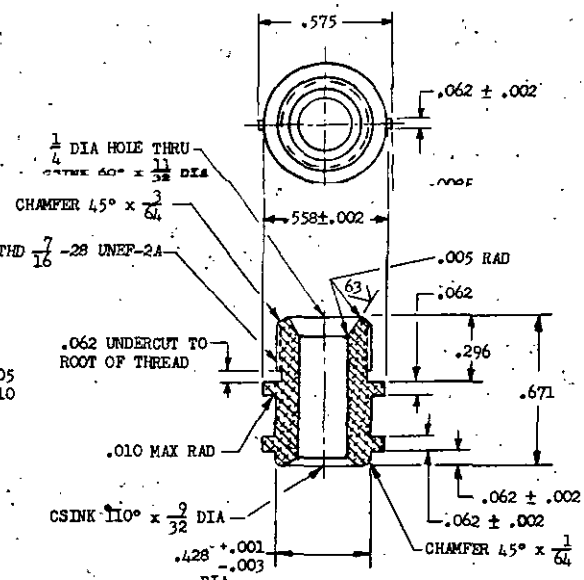

COUPLING
MATERIAL: BRASS ROD, SPEC. QQ-B-626, COMP. 22, 1/2 HARD
FINISH: CAD PLATE, SPEC, QQ-P-416, TYPE I, CLASS C, OR ZINC PLATE, SPEC. QQ-Z-325, TYPE II, CLASS 2

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 25 SEPT 1960 REVISED (A) 1 Sept 1965 see sheet 1

P.A. Navy-Wep Other Cust	TITLE CONNECTOR, OXYGEN MASK TO REGULATOR, TYPE MC-3A	MILITARY STANDARD MS28140 (WEP)
PROCUREMENT SPECIFICATION MIL-C-19246	SUPERSEDES:	SHEET 2 OF 3


DD FORM 672-1 (SEP 67) (PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


This standard has been approved by the Bureau of Naval Weapons Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
1660

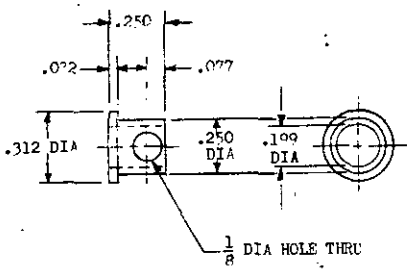


SLEEVE

MATERIAL: ALUM, SPEC QQ-A-268, COND T-4
FINISH: ANODIZE, SPEC MIL-A-8625, NATURAL

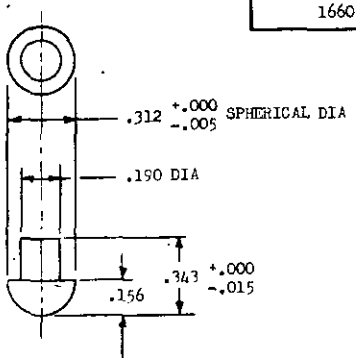


POPPET

MATERIAL: RUBBER, 65% NEW FIRST QUALITY NON-BLOOMING. MAY CONTAIN 20% OF REGROUND RUBBER OF SAME OR EQUAL STOCK. GRADE 60 ± 5 DUROMETER.

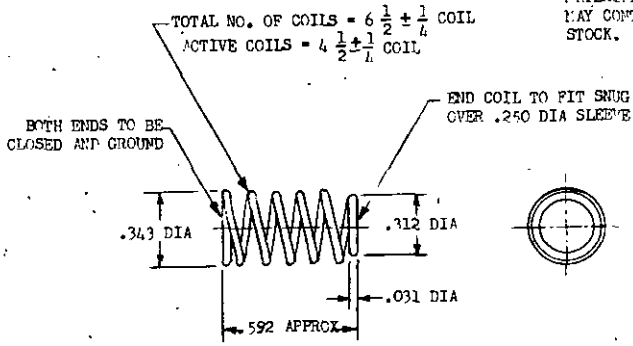


SPRING

MATERIAL: MUSIC WIRE, SPEC QQ-W-470
FINISH: CAD PLATE, SPEC QQ-P-416, TYPE I, CLASS C, OR ZINC PLATE, SPEC QQ-Z-325, TYPE II, CLASS 2
HEAT SPRING 500° - 550°F FOR 5 MINUTES AFTER PLATING
LOAD AT 9/32 LENGTH = 3 LBS. ± 10%

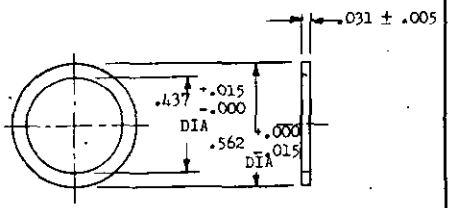


GASKET

SEE SHEET 1 OF 3 FOR NOTES

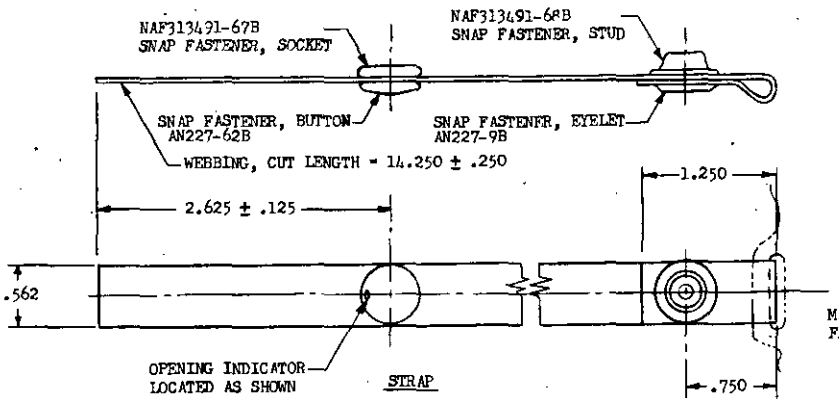

STRAP

MATERIAL: NYLON WEBBING MIL-W-4088, TYPE I, COND U, OLIVE DRAB



SLEEVE WASHER

MATERIAL: ALUM, SPEC QQ-A-355, COND T-3
FINISH: ANODIZE, SPEC MIL-A-8625, NATURAL

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

REVISED (A) 1 Sept 1965 SEE Sheet 1

APPROVED 25 SEPT 1960

P.A. Navy-Wep Other Cust	TITLE CONNECTOR, OXYGEN MASK TO REGULATOR, TYPE MC-3A	MILITARY STANDARD MS28140 (WEP)
PROCUREMENT SPECIFICATION MIL-C-19246	SUPERSEDES:	SHEET 3 OF 3

DD FORM 1 SEP 57 672-1 (Military Coordination) PREVIOUS EDITIONS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.