METRIC

A-A-55823A
24 FEBRUARY 2009
SUPERSEDING
A-A-55823
30 JULY 1996

COMMERCIAL ITEM DESCRIPTION

ALUMINUM SULFATE, TECHNICAL

The General Services Administration has authorized the use of this commercial item description.

1. SCOPE. This commercial item description (CID) covers technical grade aluminum sulfate, Chemical Abstract Service registry number (CAS#) 10043-01-3.

2. CLASSIFICATION. The aluminum sulfate shall be classified by the following types and classes.

2.1 Type. The aluminum sulfate shall be one of the types (see (7.3(b)).

Type I - Purified
Type II - Unpurified

2.2 Class. The aluminum sulfate shall be one of the classes (see 7.3(c)).

Class 1 - Lump
Class 2 – Ground
Class 3 - Rice Ground

3. SALIENT CHARACTERISTICS

3.1 Type I, Classes 1 and 2 . Type I, Class 1 and Class 2 aluminum sulfate shall conform to the American Water Works Association (AWWA) Standard B403, “Aluminum Sulfate---Liquid, Ground, or Lump”.

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center Richmond, ATTN: DSCR-VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616 or e-mailed to STDZNMGT@dla.mil . Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:57Z
Check the source to verify that this is the current version before use.

3.2 Type I, Class 3. Type I, Class 3 aluminum sulfate shall conform to the AWWA Standard B403, except that rice ground (Class 3) aluminum sulfate shall be of such size that 80% shall be retained on an 850 micrometer (#20) sieve, minimum, and 2% shall be passed on a 150 micrometer (#100) sieve, maximum, and water insoluble material shall not exceed 10.0%.

3.3 Type II, Classes 1 and 2. Type II, Class 1 and Type II, Class 2 aluminum sulfate shall conform to the AWWA Standard B403 with the exception that water insoluble material shall not exceed 10.0%.

3.4 Type II, Class 3. Type II, Class 3 aluminum sulfate shall conform to AWWA Standard B403 except that rice ground (Class 3) aluminum sulfate shall be of such size that 80% shall be retained on an 850 micrometer (#20) sieve, minimum, and 2% shall be passed on a 150 micrometer (#100) sieve, maximum, and water insoluble material shall not exceed 10.0%.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order (see 7.3(d)) and in accordance with Title 49 Part 173 Code of Federal Regulations (CFR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:57Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

A part numbering system for CID A-A-55823 is as follows:

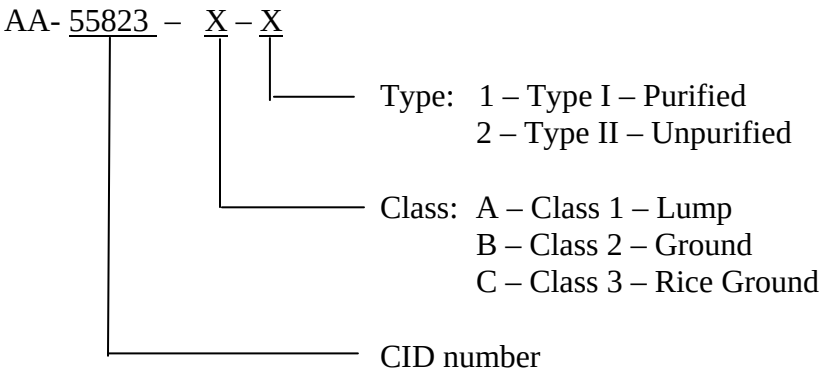

7.2 Source of documents.

7.2.1 CAS. Information on the CAS registration number can be obtained from the Chemical Abstract Service, Customer Services, P.O.Box 3012, Columbus, OH 43210-0012, phone 1-800-753-4227 (North America) or 1-614-447-3700 (worldwide). Electronic copied may be obtained from http://www.cas.org .

7.2.2 AWWA. Copies of the American Water Works Association standard may be obtained from the American Water Works Association, 6666 West Quincy Avenue, Denver, CO 80235-3098, phone 1-800-926-7337. Electronic copies may be obtained from http://www.awwa.org .

7.2.3 FAR. Copies of the FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies may be obtained from http://www.arnet.gov/far/.

7.2.4 CFR. Copied of the CFR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies may be obtained from http://www.gpoaccess.gov/cfr/.

7.3 Ordering data. The contract or order should specify the following information:

a. CID document number, revision, and CID PIN (see 7.1).
b. Type (see 2.1).
c. Class (see 2.2).
d. Preservation, packing, and marking (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:57Z
Check the source to verify that this is the current version before use.

7.4 National Stock Numbers (NSN). The following NSNs correspond to this CID. The list may not be indicative of all possible NSNs associated with this CID.

NSN	Type	Class
6810-00-686-5892	II	3
6810-00-281-7455	I	2

7.5 Subject term (key word) listing.

Sieve
Water insoluble

MILITARY INTERESTS:

Custodians:
Army – EA
Navy – SH
Air Force – 68

Review Activities:
Army – MD
Navy – MC, SA, YD

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing Activity:
DLA – GS3

(Project 6810-2009-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:57Z
Check the source to verify that this is the current version before use.