A-A-50456A
April 7, 1989
SUPERSEDING
A-A-50456
January 15, 1982

COMMERCIAL ITEM DESCRIPTION

VALVES, RADIATOR, HEATING
PACKED BONNET, CLASS 150 PSIG

The General Services Administration has authorized the use of this commercial item description in preference to Type I; Styles A and B; Patterns 1 and 2; Services 1, 3, and 4; Classes 25, 60, 100, 125, and 150 of Federal Specification WW-V-160.

Abstract. This Commercial Item Description (CID) covers packed bonnet shutoff glove valves for use on radiators and convectors in steam and hot water heating systems with pressures of 25 inches mercury vacuum up to and including 150 pounds per square inch gage (psig).

Salient characteristics. Leakage thru valve stem shall be prevented by means of non-metallic packing (non-asbestos) in accordance with manufacturers standard practice. Valves shall be designed to operate at 150 psig working steam pressure and coincident steam saturation temperature. Valves shall be copper alloy conforming to American Society for Testing and Materials (ASTM) specifications for materials. Valve disc and wheel handle shall be non-metallic. Inlet connection shall be threaded female. Outlet connection shall be threaded male tailpiece with union nut. Valve marking shall be in accordance with Manufacturers Standardization Society (MSS) standard
MSS SP-25. Valves shall be of the following patterns, styles, and sizes:

Pattern 1 - Straightway.
Pattern 2 - Angle.
Pattern 3 - Left hand.
Pattern 4 - Right hand.

Style A - Stuffing box with adjustable packing nut.
Style B - Stuffing box with spring loaded, self-adjusting packing.

Beneficial comments (recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: Commanding Officer, Naval Construction Battalion Center, ATTN: Code 156, Port Hueneme, CA 93043-5000

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 4520

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

Size 1 - 1/2 inch.
Size 2 - 3/4 inch.
Size 3 - 1 inch.
Size 4 - 1 1/4 inch.
Size 5 - 1 1/2 inch.
Size 6 - 2 inch.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this CID are met.


If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

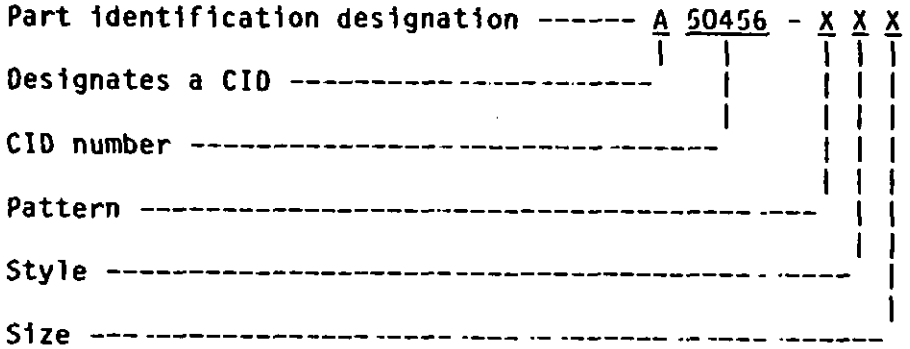

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

Notes. Purchaser should specify pattern, style, and size.

ASTM standards are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

MSS SP-25 is available from Manufacturers Standardization Society of the Valve and Fitting Industry, 1815 North Fort Myer Drive, Arlington, VA 22209.

FED-STD-376 is available from the Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.

MILITARY INTERESTS:

Custodians

Army - ME
Navy - YD
Air Force - 99

Review Activities

Air Force - 84
DLA - CS

User Activity

Army - CE

CIVIL AGENCY COORDINATING ACTIVITY:

GSA--FSS

PREPARING ACTIVITY:

Navy - YD

Project 4520-0326

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.