GGG-S-735/4
October 5, 1976

FEDERAL SPECIFICATION SHEET

STAMPING AND MARKING EQUIPMENT; RUBBER STAMP, POCKET

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the rubber stamps described herein shall consist of this document and the issue in effect of Federal Specification GGG-S-735/GEN.

REQUIREMENTS:

Configuration: The stamp shall conform to the requirements specified on figure 1.


Material: The stamp pattern and cushion shall be rubber which shall evidence no less than 15 nor more than 40 percent change in volume when tested for conformance with component and material inspection requirements of the general specification. The pattern and cushion shall be secured to the barrel face in accordance with the manufacturer's standard commercial practice.

The barrel and cap shall be aluminum and cylindrical in shape for the barrel and a high density polyethylene plastic, brass or stainless steel for the cap. The cap shall have a wool felt ink pad furnished without ink. Positive locking means such as threads, spring lock or snap on shall be used to hold the cap on the barrel. The loop for a wrist strap shall be stainless steel or brass, or shall be an integral part of the barrel.

The clip shall be a standard conventional clip, no less than 1-inch long, secured to and fixed in such a position so as to indicate the top of the pattern. The clip shall be made of corrosion-resistant steel or spring steel plated in accordance with the manufacturer's standard practice. The end of the clip shall be set to allow no more than 0.006-inch between the clip and the barrel and shall withstand being flexed 200 times without fracture, breakage or permanent deformation when tested for conformance with the end item requirements of the general specification.

FSC 7520

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

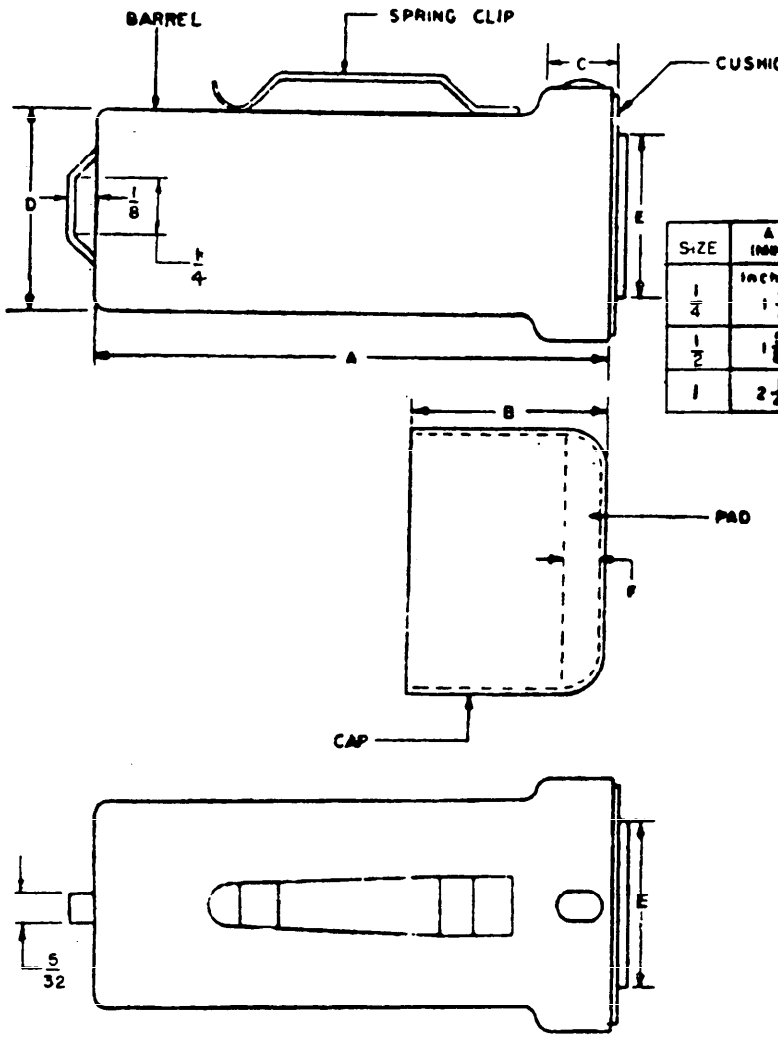

SIZE	A (MIN)	B (MIN)	C (MIN)	D (MIN)	SIZE E ±3%	F (MIN)
	inches	inch	inch	inch	inch	inch
1/4	1 5/8	5/8	3/8	5/8	1/4	1/8
1/2	1 5/8	5/8	3/8	5/8	1/2	1/8
1	2 1/4	5/8	3/8	5/8	1	1/8

UNLESS OTHERWISE SPECIFIED, TOLERANCE: PLUS OR MINUS 1/64 "E" DIMENSION (SEE FIGURE 1)

RUBBER STAMP, POCKET
FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

Part Number: GGGS735-4P - Partial Inspection Approval
GGGS735-4C - Complete Inspection Approval

Custodians:

Army - GL
Navy - SA
Air Force - 99

Review activities:

Army - MD
Navy - MS
DSA-CS

Preparing activity:

Army - GL

Civil Agency Coordinating Activity:

GSA-FSS

Project No. 5120-0862-4

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 25 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.