UU-C-250a
December 7, 1965

SUPERSEDING
Fed. Spec. UU-C-250
August 15, 1956

FEDERAL SPECIFICATION

CASE, FILING, TRANSFER, COLLAPSIBLE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. The transfer filing cases covered by this specification are of the collapsible, vertical, open end type, that are fitted with a telescopic style inner binder having a removable lock-arch paper holder.

1.2 Classification. Transfer filing cases shall be of one type and the following sizes as specified (see 3.4 and 6.2):

Letter size.
Legal size.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

UU-T-111—Tape; Paper, Gummed (Sealing and Securing).
PPP-B-636—Box, Fiberboard.
PPP-B-665—Boxes; Paperboard, Metal Stayed (Including Stay Material).
PPP-B-676—Boxes, Set-up, Paperboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standard from established distribution points in their agencies.)

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Standard product. Transfer filing cases furnished under this specification shall be the manufacturer's standard commercial product except for any design modifications and additional requirements specified herein.

3.2 Materials. Materials shall conform to the applicable requirements specified herein. Where materials are not definitely specified, they shall be of the best quality used for the purpose in commercial practice.

3.3 Design and construction. Transfer filing cases shall be made of a solid fiberboard, shall be collapsible, and shall consist of an outer case and a telescoping inner binder, equipped with a removable lock-arch paper holder. The components shall be so designed that the case or its contents show no evidence of damage or deformation when tested in accordance with 4.4.1. The case shall have the general design and construction illustrated by figure 1.

FSC 7520

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:20Z
Check the source to verify that this is the current version before use.

3.3.1 *Outer case.* The outer case shall be formed into an open-end setup box. The back end of the box shall be designed so that it can be securely fastened when the case is setup by an interlocking closure or any other means that will pass the test in 4.4.1. The front or open-end of the box shall be bound with cloth tape. The sides of the case shall not bend or bulge more than ¼-inch when subjected to the weight test in 4.4.2.

3.3.2 *Inner binder.* The inner binder shall be formed into a looseleaf type folder that snugly fits the outer case in 3.3.1, and completely closes the open end. The sides of the inner binder shall extend to the full depth and height of the inside of the outer case, and the corners of the flaps shall be rounded. The binding folder shall be equipped with a metal plate for mounting the removable arch paper holder in 3.3.3. The exposed end of the binder shall have a printed full face label with blank spaces for inscribing the nature and dates of the material filed, and a metal or leather pull tab to facilitate removing the binder from the outer case.

3.3.3 *Arch paper holder.* The arch paper holder shall have a metal base with two metal arches attached thereon spaced on 2¾ inch centers. Each arch shall have a movable and fixed portion. The movable portion shall be J-shaped wire approximately ½ inch in diameter. The fixed portion shall be 5/16-inch diameter, tubular construction with tops cut back to receive the ends of the movable arches. The arch paper holder shall be attachable to the metal plate in 3.3.2 by a suitable locking device, so that the mechanism does not become detached under ordinary usage.

3.3.3.1 *Adjustable metal compressor.* Each arch paper holder shall have an adjustable metal compressor designed with a locking device to fit over the fixed arch posts for holding papers in a compact arrangement.

3.4 **Sizes and dimensions.** The sizes and dimensions of the transfer filing cases shall be as shown in table I.

3.4.1 *Tolerance.* A plus tolerance of ¼-inch or a minus tolerance of ⅛-inch will be permitted in the dimensions shown in table I.

3.5 **Marking.** Each transfer case shall be permanently and legibly identified with the name or trademark of the manufacturer. Instruction data for assembly of the transfer filing cases shall be plainly indicated.

TABLE I.

Size	Dimensions (inches)		
	Height	Width	Depth
Letter size	9½	3½	12⅝
Legal size	9½	3½	15⅝

3.6 **Workmanship.** Transfer cases shall be free from any defects or imperfections which affect appearance or may impair the serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Component and material inspection.** In accordance with 4.1, the supplier is responsible for insuring that components and materials used were manufactured, examined, and tested in accordance with this specification or referenced subsidiary specifications to the extent specified.

4.3 **Sampling for inspection and acceptance.** Sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105, except where otherwise indicated. For sampling purposes, a lot shall consist of all transfer filing cases of the same size offered for delivery at one time.

4.3.1 *End item inspection.* The sample unit shall be one complete filing case assembly and the lot size shall be the number of cases in the inspection lot.

4.3.1.1 *Visual examination.* Transfer filing cases shall be examined for the defects classified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. *Classification of defects*

Defect	Category	
	Major	Minor
Not size specified	X	
Outer case:		
Not collapsible	X	
No fastening on back end	X	
No cloth binding on front edge	X	
Inner binder:		
Not collapsible	X	
Fits loosely in outer case	X	
Does not completely close open end of outer case	X	
Flaps not full depth and height of outer case	X	
Outer corners not rounded	X	
No metal plate	X	
Metal plate not securely attached	X	
No locking device on metal plate	X	
No printed label on end	X	
No metal or leather pull tab	X	
Arch paper holder:		
No arch paper holder	X	
Arch not spaced 2¾ inches	X	
Movable portion binds	X	
Movable portion not J-shaped	X	
Movable portion not ⅛-inch diameter	X	
Fixed portion not 3/16-inch diameter	X	
Fixed portion not tubular construction		X
Not attachable to metal plate in binder	X	
Does not lock in place when attached		X
No metal compressor	X	
No locking device on compressor	X	
Marking, manufacturer's name or trademark, instruction data not permanently marked, missing, incorrect, or illegible		X
Not clean		X
Not smooth		X

in table II. Inspection level II shall apply and acceptance determined using an acceptable quality level (AQL) of 1.5 major and 6.5 total defects per hundred units.

4.3.1.2 *Dimensional examination.* Transfer filing cases shall be examined for dimensional defects in table III. Inspection level S-2 shall apply and the AQL shall be 4.0 defects per hundred units.

TABLE III. *Dimensional defects*

Characteristic	Defects	
	Letter size	Legal size
Height	Over 9½ inches	Over 9½ inches.
	Under 9½ inches	Under 9½ inches.
Width	Over 3¾ inches	Over 3¾ inches.
	Under 3¾ inches	Under 3¾ inches.
Depth	Over 12¾ inches	Over 15¾ inches.
	Under 12¾ inches	Under 15¾ inches.

4.3.1.3 *Testing of the end item.* Each lot of transfer filing cases shall be tested in accordance with 4.4 to determine compliance with requirements in section 3. Inspection level S-2 shall apply and the AQL shall be 2.5 defects per hundred units.

4.3.2 *Examination of preparation for delivery.* The packaging, packing, and marking shall be examined to determine compliance with the requirements of section 5 and the special requirements in the contract or order. The lot size shall be the number of shipping containers in the end item inspection lot and the sample unit shall be one shipping container fully prepared for delivery. Inspection level S-2 shall apply and lot acceptance shall be based on an AQL of 4.0 defects per hundred units. The lot shall be examined for defects in table IV.

4.4 Tests.

4.4.1 *Drop test.* Insert a ream of 8- by 10½-inch paper, substance 20 (17 by 22-500), in the arch post and securely lock the compressor. Place the inner binder into the outer case in the usual manner. Locate the assembled transfer filing case in a vertical filing position on a flat table surface of a height of 30 ± 1 inch, making certain the back end of the case extends over the edge of the table. Push the case off the table so that the back end receives the full impact of the drop. Examine visually for evidence of loosening of the back and closure and the metal compressor, or for any crushed or dented corners that would render the transfer filing case unusable (see 3.3 and 3.3.1).

4.4.2 *Weight support test.* Remove the inner case from the outer case and locate the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:20Z
Check the source to verify that this is the current version before use.

TABLE IV. *Defects in preparation for delivery*

Examine	Defect
Marking: (Unit package and shipping container)	Not in accordance with specification requirements. Omitted, incomplete, incorrect, or illegible. Improper size, location, sequence, or method.
Packaging:	End item not in knockdown condition. Contents not packaged to prevent movement. Box not as specified. Box not sealed with tape. Components missing. (NOTE: Not less than three packages shall be randomly selected from each container in the sample size to determine the number of filing cases per package.)
Packing:	Not specified type of shipping container.
Level A	Container not waterproofed with case liner. Not specified case liner. Not strapped as specified.
Level B	Not specified type of container. Flaps not securely sealed with adhesive. Insufficient metal stitching.
Workmanship:	Incomplete or inadequate closure of case liner or shipping container. Loose strapping (where required). Insufficient strapping or taping. Contortion or bulging of the container. Damaged, bruised or crushed container.
Contents:	Less than the number of packages per container specified or indicated.

outer case on a flat table surface in the usual vertical filing position. Place a 5-pound weight, having an approximate 36-square-inch base, across the top surface of the outer case. Then place a straightedge to the sides of the outer case and measure the bend or bulge (see 3.3.1).

5. PREPARATION FOR DELIVERY

Fed. Std. No. 102 should be referred to for definitions and application of the various levels of packaging and packing.

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 *Level A.* Twelve transfer filing cases, in a knockdown condition, shall be packaged in a paperboard box conforming to PPP–B–665, style A or B, or in boxes conforming to type I, grade A, class A or B of PPP–B–676. The components shall be cushioned as needed to prevent movement of the contents, and each box shall be secured with gummed tape conforming to UU–T–111.

5.1.2 *Level C.* Transfer filing cases shall be packaged in a knockdown condition in accordance with the commercial practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 *Level A.* Thirty-six transfer filing cases, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard box conforming to class weather-resistant V3c or V3s, style RSC of PPP–B–636. Each shipping container shall be waterproofed, closed, and reinforced in accordance with the appendix to the container specification.

5.2.2 *Level B.* Thirty-six transfer filing cases, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard box conforming to class domestic type CF or SF, style RSC of PPP–B–636, except that the minimum bursting strength of the fiberboard shall be 275 p.s.i. Containers shall be closed and sealed in accordance with the appendix to the container specification.

5.2.3 *Level C.* Transfer filing cases, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.* Unless otherwise specified, each shipping container shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military agencies.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL–STD–129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:20Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Transfer filing cases are intended for storing inactive post-bound documents in a neat, clean, and compact manner so that they can be readily referenced.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, date, and number of this specification.
(*b*) Size (see 1.2 and 3.4).
(*c*) Level of packaging and packing (see 5.1 and 5.2).
(*d*) Marking required (see 5.3).

6.3 Transportation description. Transportation description and minimum weights applicable to this commodity are:

Rail:
Letter, invoice, or document files, not otherwise indexed by name, paper or pulpboard. (Specify flat or folded flat.)
Carload minimum weight 24,000 pounds, subject to Rule 34, Uniform Freight Classification.

Motor:
Letter, invoice, or document files, paper or pulpboard. (Specify flat or folded flat.)
Truckload minimum weight 24,000 pounds, subject to Rule 115, National Motor Freight Classification.

MILITARY CUSTODIANS:
Army—GL
Navy—SA
Air Force—67

Interested Activities:

Review
Army—GL
Navy—SA
Air Force—69

Users
Army—MO, MD
Navy—MC

Preparing Activity:
Navy—SA

Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on information in the current Federal Supply Classification Listing of DOD Standardization Documents.

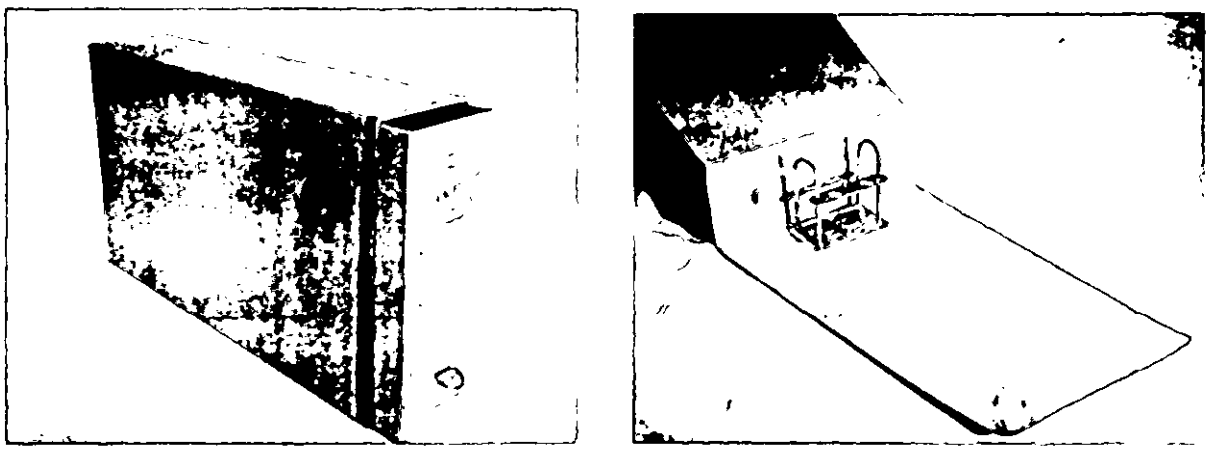


FIGURE 1. Case, filing, transfer, collapsible.

*U.S. GOVERNMENT PRINTING OFFICE: 1965

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:20Z
Check the source to verify that this is the current version before use.