[INCH-POUND]
A-A-55485/5D
29 August 2025
SUPERSEDING
A-A-55485/5C
14 August 2020

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, LEAD CONVERSION, .200 or .230 DIAMETER PIN CENTER TO A GRID PATTERN

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for MIL-M-38527/5D for all federal agencies.

The complete requirements for procuring the mounting pads described herein shall consist of this document and the issue in effect of CID A-A-55485.

CLASSIFICATION OR PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

A-55485	/05	-001	D
CID number	Applicable CID sheet (two digits)	Dash number (see figure 1)	Material letter

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Mounting pads supplied to this CID shall be as specified herein (see figure 1).

Materials. Material shall be diallyl phthalate (D) or nylon (N), or polyphenylene sulfide (S).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

COMMERCIAL ITEM DESCRIPTION


A-A-55485 - Mounting Pads, Electrical-Electronic Components, General Requirements for

(Copies of this document are available online at https://quicksearch.dla.mil).

AMSC N/A FSC 5999

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

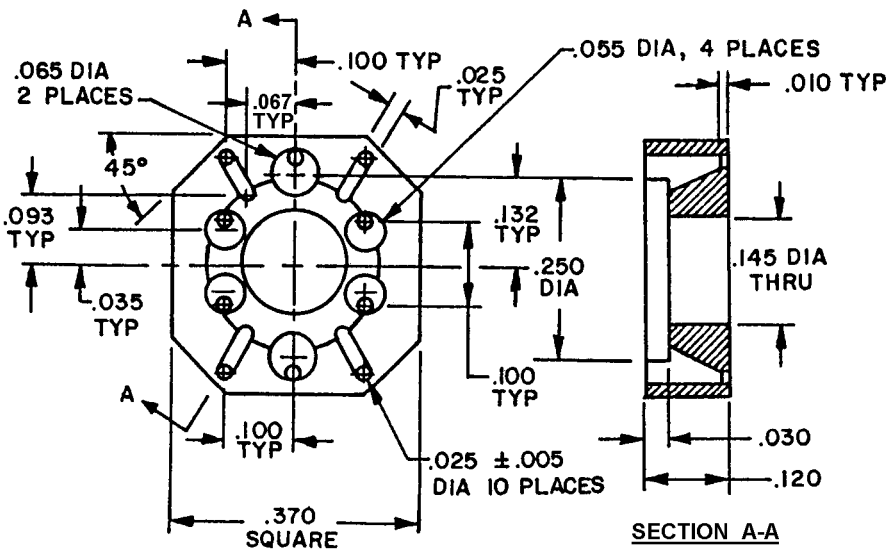


A-55485/05-001

Inches	mm
.005	0.13
.010	0.25
.025	0.64
.030	0.76
.035	0.89
.055	1.40
.065	1.65
.067	1.70
.093	2.36
.100	2.54
.120	3.05
.132	3.35
.145	3.68
.250	6.35
.370	9.40

FIGURE 1. Configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

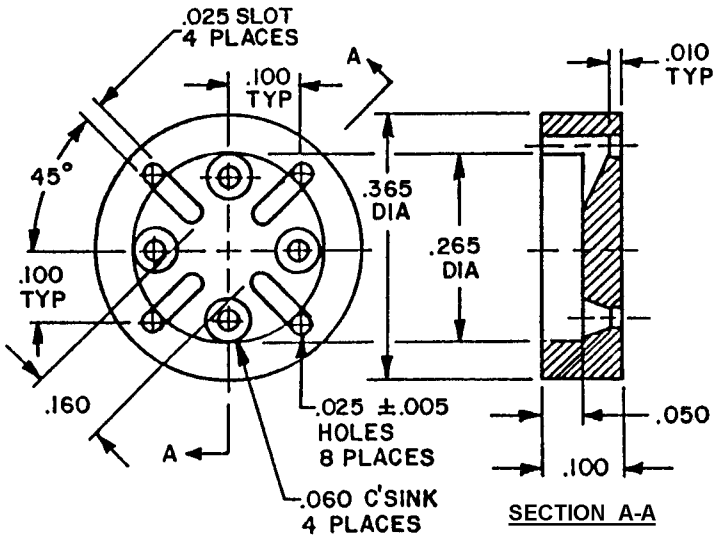


Inches	mm
.005	0.13
.010	0.25
.025	0.64
.050	1.27
.060	1.52
.100	2.54
.160	4.06
.265	6.73
.365	9.27

A-55485/05-002


FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

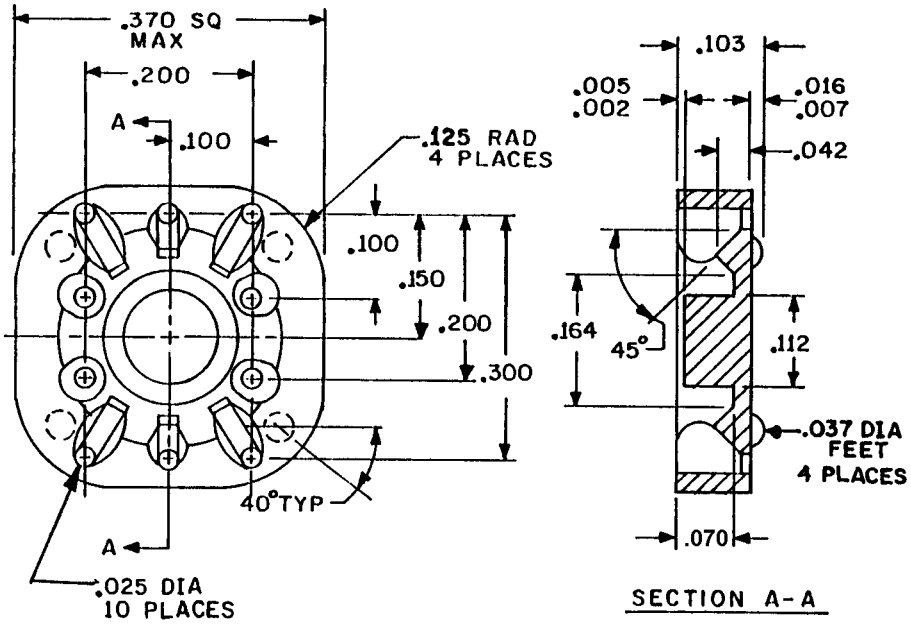

A-55485/05-003

Inches	mm
.002	0.05
.003	0.08
.005	0.13
.012	0.30
.016	0.41
.025	0.64
.037	0.94
.042	1.07
.070	1.78
.100	2.54
.103	2.62
.112	2.84
.150	3.81
.164	4.16
.200	5.08
.250	6.35
.300	7.62
.340	8.64
.370	9.40

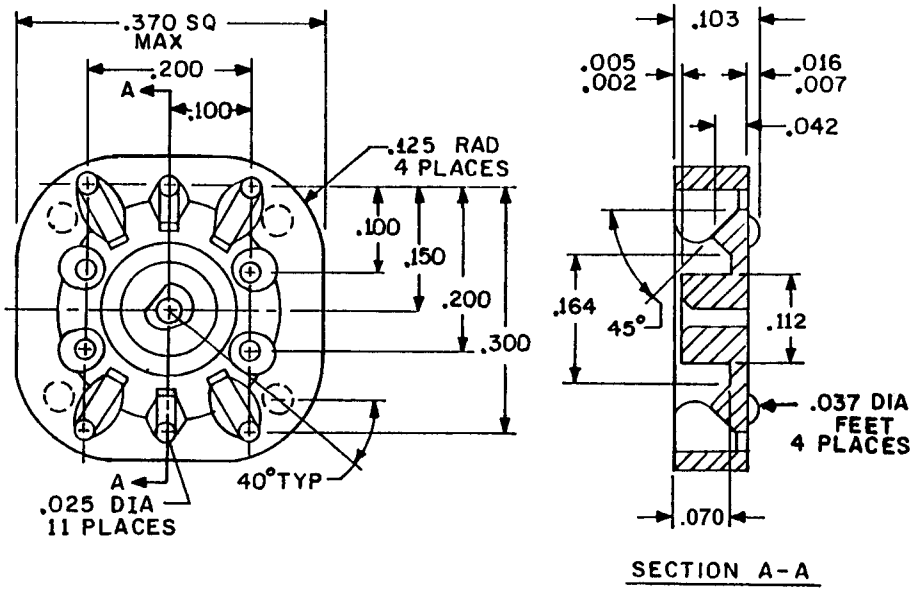


A-55485/05-004

Inches	mm
.002	0.05
.003	0.08
.005	0.13
.012	0.30
.016	0.41
.025	0.64
.037	0.94
.042	1.07
.070	1.78
.100	2.54
.103	2.62
.112	2.84
.150	3.81
.164	4.16
.200	5.08
.250	6.35
.300	7.62
.340	8.64
.370	9.40


FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

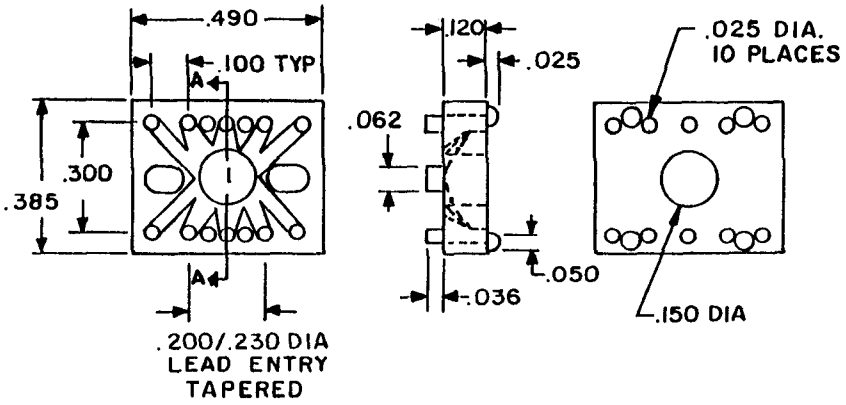


A-55485/05-005

Inches	mm
.025	0.64
.036	0.91
.050	1.27
.062	1.57
.100	2.54
.125	3.18
.150	3.81
.200	5.08
.230	5.84
.300	7.62
.385	9.78
.490	12.45

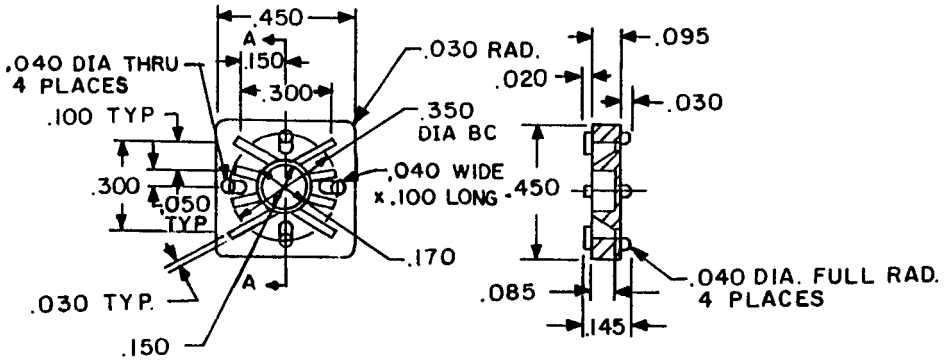

A-55485/05-006

Inches	mm
.020	0.51
.030	0.76
.040	1.02
.050	1.27
.085	2.16
.095	2.41
.100	2.54
.145	3.68
.150	3.81
.170	4.32
.300	7.62
.350	8.89
.450	11.42

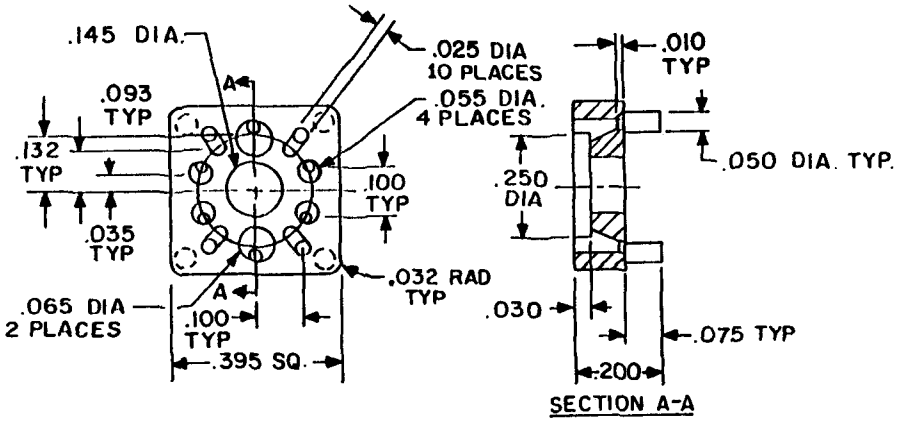


A-55485/05-007

Inches	mm
.010	0.25
.025	0.64
.030	0.76
.035	0.89
.050	1.27
.065	1.40
.075	1.91
.093	2.36
.100	2.54
.145	3.68
.152	3.86
.200	5.08
.250	6.35
.395	10.03


FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

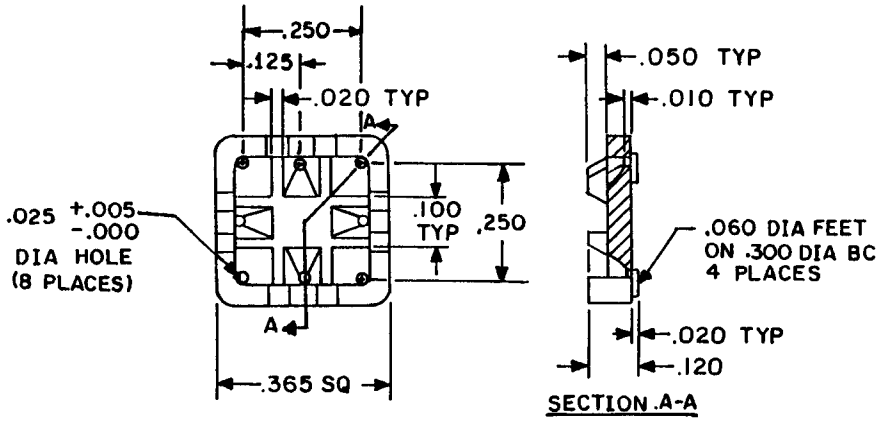

Inches	mm
.010	0.25
.020	0.51
.050	1.27
.100	2.54
.120	3.05
.365	9.27

A-55485/05-008

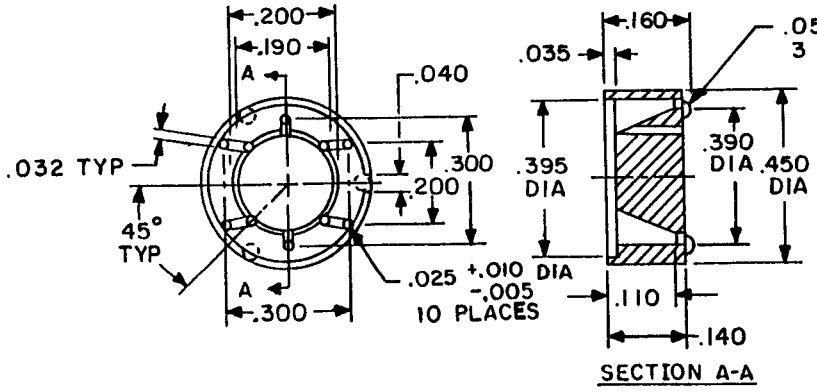


Inches	mm
.005	0.13
.010	0.25
.025	0.64
.032	0.81
.035	0.89
.040	1.02
.050	1.27
.110	2.79
.140	3.56
.160	4.06
.190	4.83
.200	5.08
.300	7.62
.390	9.91
.395	10.03
.450	11.43

A-55485/05-009


FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

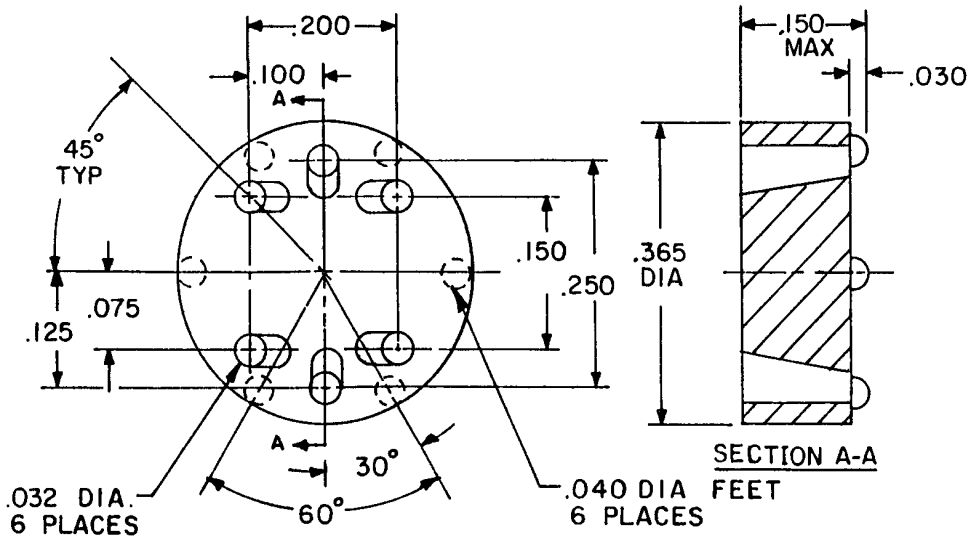

Inches	mm
.030	0.76
.040	1.02
.052	1.32
.075	1.91
.100	2.54
.125	3.18
.150	3.81
.200	5.08
.250	6.35
.365	9.27

A-55485/05-010

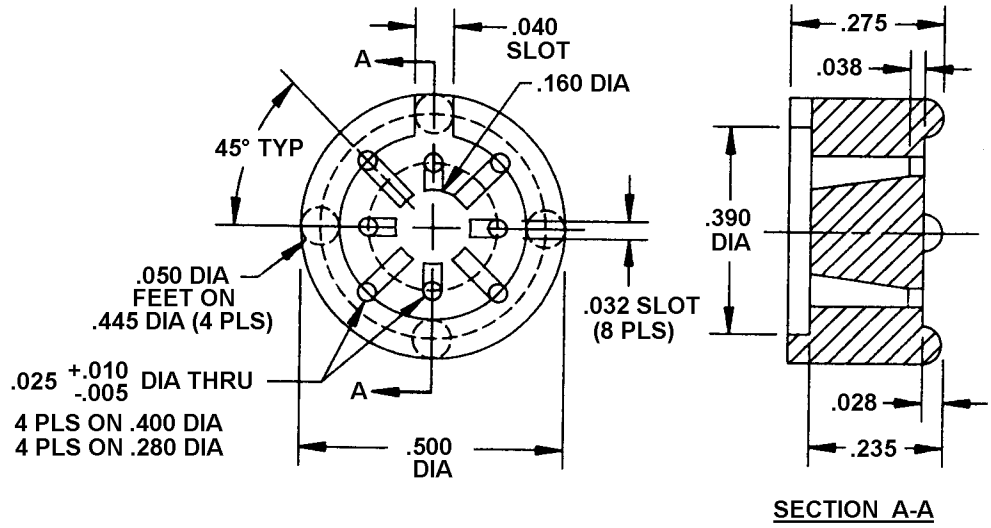


Inches	mm
.005	0.13
.010	0.25
.025	0.64
.028	0.71
.032	0.81
.038	0.97
.040	1.02
.050	1.27
.160	4.06
.235	5.97
.275	6.99
.280	7.11
.390	9.91
.400	10.16
.445	11.30
.500	12.70

A-55485/05-011

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

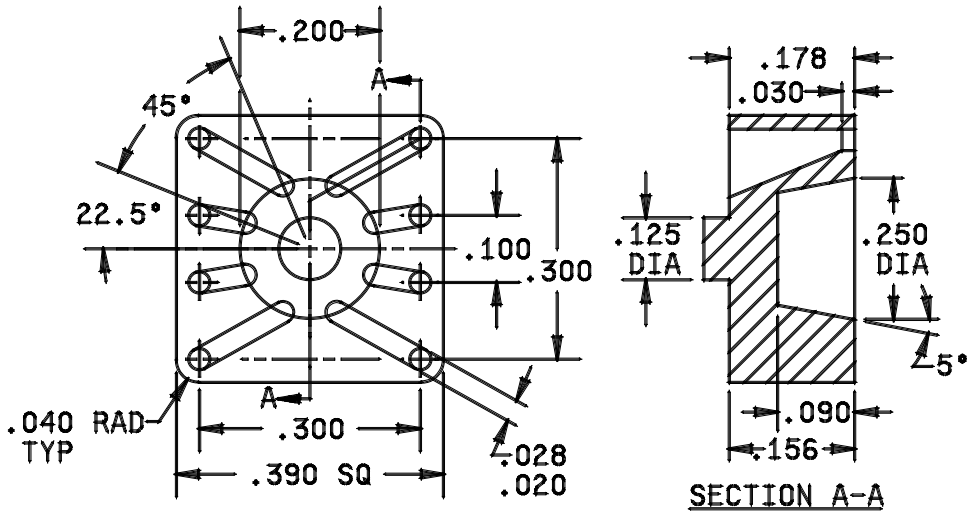


A-55485/05-012

Inches	mm
.020	0.51
.028	0.71
.030	0.76
.040	1.02
.090	2.29
.100	2.54
.125	3.18
.156	3.96
.178	4.52
.200	5.08
.250	6.35
.300	7.62
.390	9.91

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

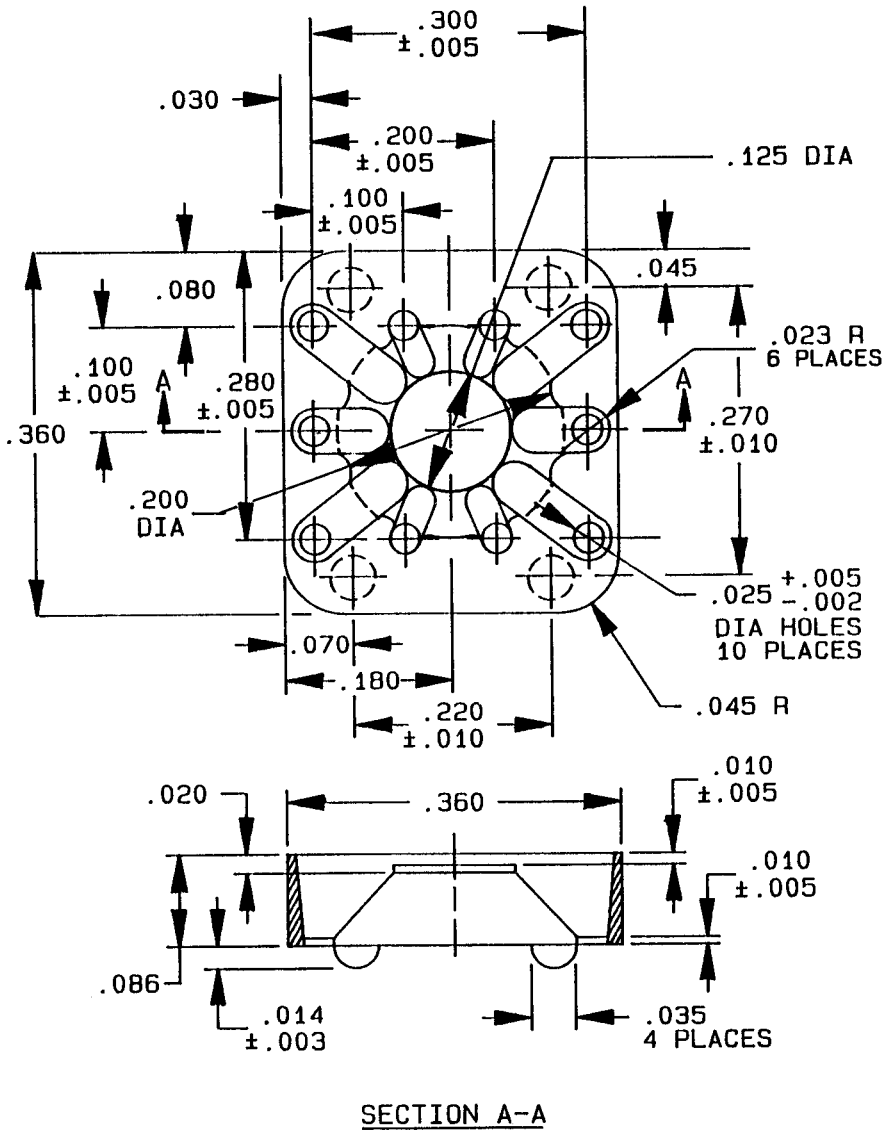


SECTION A-A

A-55485/05-013

Inches	mm
.002	0.05
.003	0.08
.005	0.13
.010	0.25
.014	0.36
.020	0.51
.023	0.58
.025	0.64
.030	0.76
.035	0.89
.045	1.14
.070	1.78
.080	2.03
.086	2.18
.100	2.54
.125	3.18
.180	4.57
.200	5.08
.220	5.59
.270	6.86
.300	7.62
.360	9.14

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

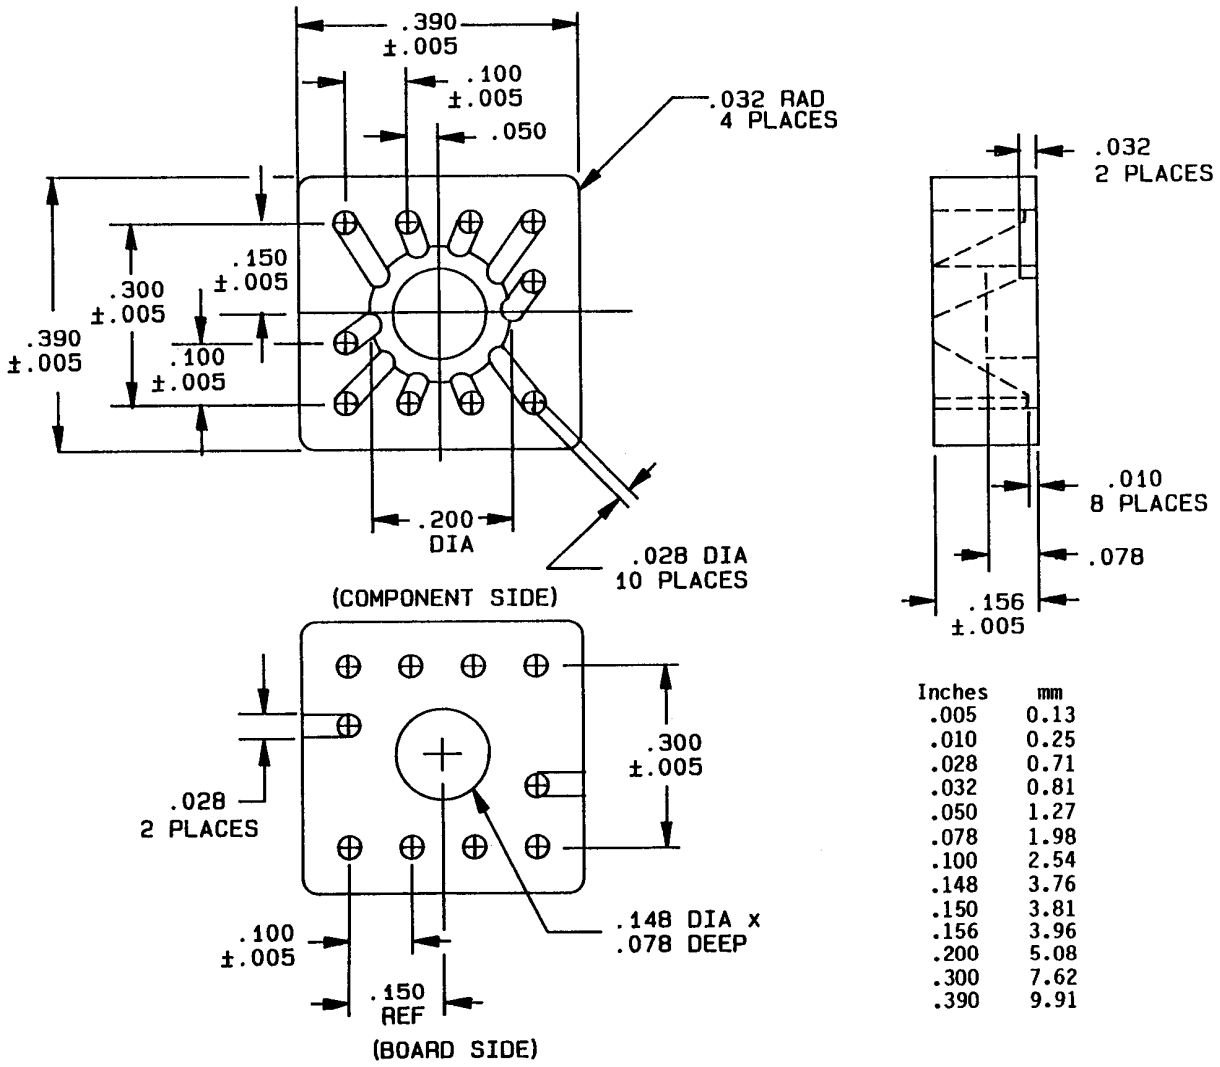

A-55485/05-014

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on height of pad shall be ±.015 (0.38 mm).
4. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for decimals and ±1° on angles. .010 (0.25 mm) radius is permissible on corners and edges. A 1° draft is permitted on sides.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict acquisition to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
0ZK84	Micro-Dimensional Products 199 W Spruce Street Norristown, PA 19401-3863 (610) 239-7940 https://www.microdimensional.com
21071	Globe Plastics, Inc. 13477 12th Street Chino, CA 91710-5206 (909) 464-1520 https://www.globecomposites.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID PINs supersede the following MFR's P/N's (table I) and (table II) as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE I. P/N Supersession data.

Dash number (see figure 1) A-55485/05-	Manufacturers part number 1/	
	CAGE 0ZK84	CAGE 21071
001D	10335D	10462-2
001N	10335N	10462-1
001S	10335PPS	10462-5
002D	10336D	10682-2
002N	10336N	10682-1
002S	10336PPS	10682-5
003D	10510D	10524-2
003N	10510N	10524-1
003S	10513PPS	10524-5
004D	10651D	
004N	10651N	
004S	10651PPS	
005D	10591D	10528-2
005N	10591N	10528-1
005S	10591PPS	10528-5
006D	10609D	10530-2
006N	10609N	
006S	10609PPS	
007D	10318D	10660-2
007N	10318N	10660-1
007S	10318PPS	10660-5
008D	10272D	
008N	10272N	
008S	10272PPS	
009D	10675D	
009N	10675N	
009S	10675PPS	
010D	10175D	10536-2
010N	10175N	10536-1
010S	10175PPS	10536-5
011D	10635D	10314-2
011N	10635N	10314-1
011S	10635PPS	10314-5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. P/N Supersession data - Continued.

Dash number (see figure 1) A-55485/05-	Manufacturers part number 1/	
	CAGE 0ZK84	CAGE 21071
012D	10615D	
012N	10615N	
012S	10615PPS	
013D	10616D	10888-2
013N	10616N	10888-1
013S	10616PPS	10888-5
014D	10411D	10892-2
014N	10411N	10892-1
014S	10411PPS	10892-5

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements see the marking paragraph.

TABLE II. MIL-M-38527/5 P/N supersession data. 1/

Superseded part number M38527/05 -	Replacement CID Part number A-55485/05 -
001	001
002	002
003	003
004	004
005	005
006	006
007	007
008	008
009	009
010	010
011	011
012	012
013	013
014	014

1/ Complete PIN shall include a suffix letter to denote material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this CID specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:

DLA - CC

(Project 5999-2025-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.