MILITARY SPECIFICATION

TERMINALS, LUG, STYLE LP08

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers the detail requirements for style LP08 lug terminals.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-C-17361 — Circuit Breakers, Air, Electric, Insulated Enclosure (Shipboard Use).

MIL-T-55156 — Terminals, Lug; Splices, Conductor; Screw Type, General Specification for.

(Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Requirements.** Requirements shall be in accordance with Specification MIL-T-55156, and as specified herein.

3.2 **Design and construction.** Lug terminals shall be of the design, construction, and physical dimensions specified on figure 1.

3.3 **Voltage drop.** The voltage drop shall be as specified on figure 1, as applicable.


3.4 **Tensile strength.** The tensile strength shall be as specified on figure 1, as applicable.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with Specification MIL-T-55156.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

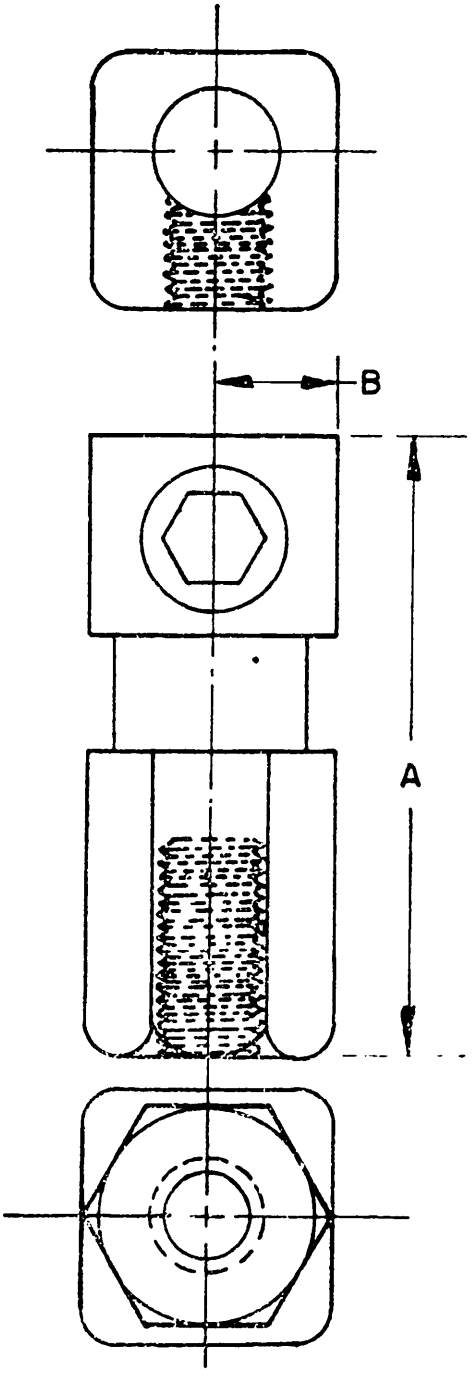

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

Item No.	Terminal size	Navy types AQB or NQB circuit-breaker frame size[1]	Breaker stud size	Dimensions		Rated current	Voltage	Tensile strength
				A (max)	B (max)			
		Amperes	*Inch by tpi*			*Amperes, max*	*Volt, max*	*Pounds, min*
1	14	100	3/8–16 UNC	2½	27/64	21	0.025	55
2	12–10	100	3/8–16 UNC	2½	27/64	66	0.025	115
3	9	100	3/8–16 UNC	2½	27/64	92	0.025	145
4	8	100	3/8–16 UNC	2½	27/64	117	0.025	180
5	6	100	3/8–16 UNC	2½	27/64	142	0.025	220
6	5	100	3/8–16 UNC	2½	27/64	165	0.025	260
7	4	100	3/8–16 UNC	2½	27/64	189	0.025	325
8	3	100	3/8–16 UNC	2½	27/64	215	0.025	390
9	2	100	3/8–16 UNC	2½	27/64	253	0.025	450
10	1	100	3/8–16 UNC	2½	27/64	300	0.025	490
11	0	100	3/8–16 UNC	2½	27/64	345	0.025	530
12	4	225	½–13 UNC	3	63/64	189	0.020	325
13	3	225	½–13 UNC	3	63/64	215	0.020	390
14	2	225	½–13 UNC	3	63/64	253	0.020	450
15	1	225	½–13 UNC	3	63/64	300	0.020	490
16	0	225	½–13 UNC	3	63/64	345	0.020	530
17	00	225	½–13 UNC	3	63/64	400	0.020	590
18	000	225	½–13 UNC	3	63/64	465	0.020	650
19	0000	225	½–13 UNC	3	63/64	540	0.020	750
20	00	600	1 –12 UNF	4	63/64	400	0.020	590
21	000	600	1 –12 UNF	4	63/64	465	0.020	650
22	0000	600	1 –12 UNF	4	63/64	540	0.020	750
23	300 MCM	600	1 –12 UNF	4	63/64	595	0.020	875
24	350 MCM	600	1 –12 UNF	4	63/64	670	0.020	900
25	400 MCM	600	1 –12 UNF	4	63/64	740	0.020	1,200

[1] Circuit breakers are as specified in Specification MIL-C-17361.

1. All dimensions in inches.
2. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

FIGURE 1. *Style LP08 lug terminals.*

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL–T–55156.

6. NOTES

6.1 The notes specified in Specification MIL–T–55156 are applicable to this specification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army—SigC
Navy—Ships
Air Force

Preparing activity:
Army—SigC

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.