
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN153501 THRU AN153800

FSC 5307

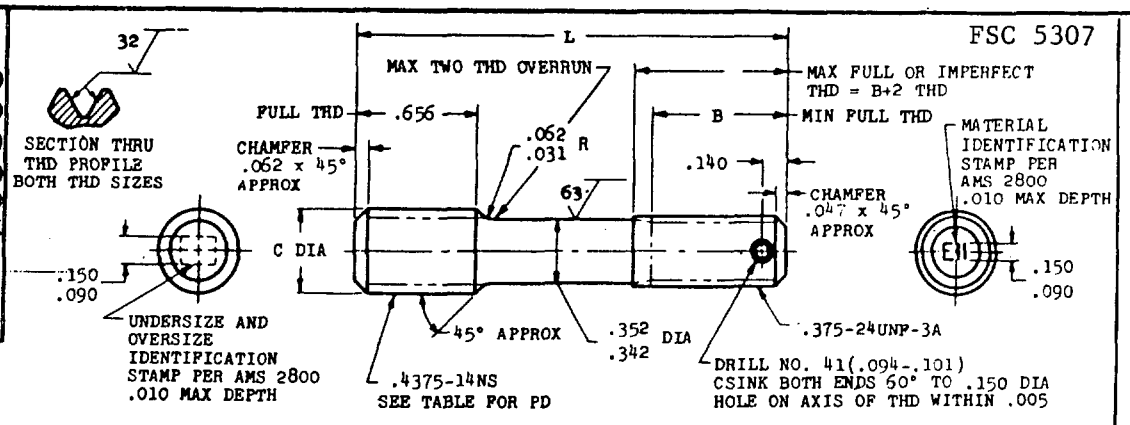

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD (O)	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.433- .438	.433- .438	.433- .438	.433- .438	.442- .447	.442- .447
PD BEFORE PLATING		.3927-.3937	.3957-.3967	.3987-.3997	.4017-.4027	.4047-.4057	.4077-.4087
PD AFTER PLATING		.3932-.3947	.3962-.3977	.3992-.4007	.4022-.4037	.4052-.4067	.4082-.4097
PD LEAD THREAD		.3861-.3881	.3891-.3911	.3921-.3941	.3951-.3971	.3981-.4001	.4011-.4031
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.344	.562	AN153519	AN153520	AN153521	AN153522	AN153523	AN153524
1.406	.625	AN153525	AN153526	AN153527	AN153528	AN153529	AN153530
1.469	.688	AN153531	AN153532	AN153533	AN153534	AN153535	AN153536
1.531	.688	AN153537	AN153538	AN153539	AN153540	AN153541	AN153542

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

MATERIAL: [redacted] (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) DO NOT USE UNASSIGNED PART NUMBERS.

(4) CANCELED AS OF 9 OCT 87

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 30 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (4) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN153501 THRU AN153800
NONE	STUD-STEPPED, DRILLED, 1.5 DIA ENGAGEMENT, .4375-14 x .375-24	

E-25-121

Project 5307-0375

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.