
MIL-C-13486/11
2 June 1964

MILITARY SPECIFICATION SHEET

CABLE, SPECIAL PURPOSE, ELECTRICAL: LOW TENSION,
HEAVY DUTY MULTIPLE CONDUCTORS UNSHIELDED

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Specification MIL-C-13486.

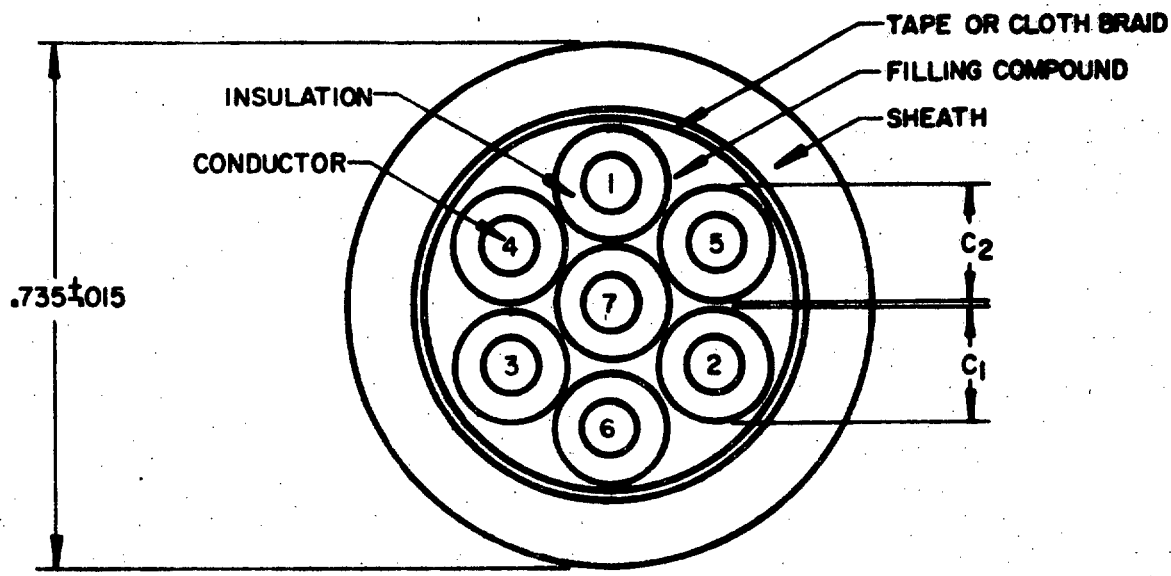

NOTE: All dimensions in inches.

REQUIREMENTS:

Dimensions and configuration: See above figure and diameter "C" below.
Conductor size: Conductors 1, 2 and 3 are size 12 and 4, 5, 6 and 7 are size 14 (see Table I of Specification MIL-C-13486).
Insulated conductor diameter "C": "C_1" = .156 ± .010 inches for insulated conductors 1, 2 and 3. C_2 = .137 ± .010 inches for "insulated" conductors 4, 5, 6, and 7.
Insulated conductors identification: See color code chart below.

FSC-6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:40Z
Check the source to verify that this is the current version before use.

Color code chart

Conductor No.	Base	Stripe or tracer
1	Green	None
2	Green	Black
3	Green	White
4	Red	None
5	Red	Black
6	Red	White
7	Red	Green

Part Number: M13486/11-1
Former Part Number: 7056685

Custodian:
Army - AT
Navy - SH

Preparing activity:
Army - AT

Project No. 6145-0295

Reviewer interest:
Navy - SH

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:40Z
Check the source to verify that this is the current version before use.