This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

REVIEWER SYMBOLS:
NAVY - AS
USAF - 80
ARMY - GL, MU

USER SYMBOLS:
NAVY - MC, SH, EC
ARMY - EL

P.A. NAVY - AS
Other Cust USAF - 84
ARMY - EL

PROCUREMENT SPECIFICATION: MIL-T-22520

SUPERSEDES:

TITLE: DIE, CRIMPING TOOL - FOR USE WITH MS25036, SIZE 8 THROUGH 4/0 TERMINALS

SHEET 1 OF 4


MILITARY STANDARD

MS23002

(D) ENTIRE STANDARD REVISED AND REDRAWN.

FOR NOTES SEE SHEET 4

UPPER & LOWER DIE ASSEMBLY

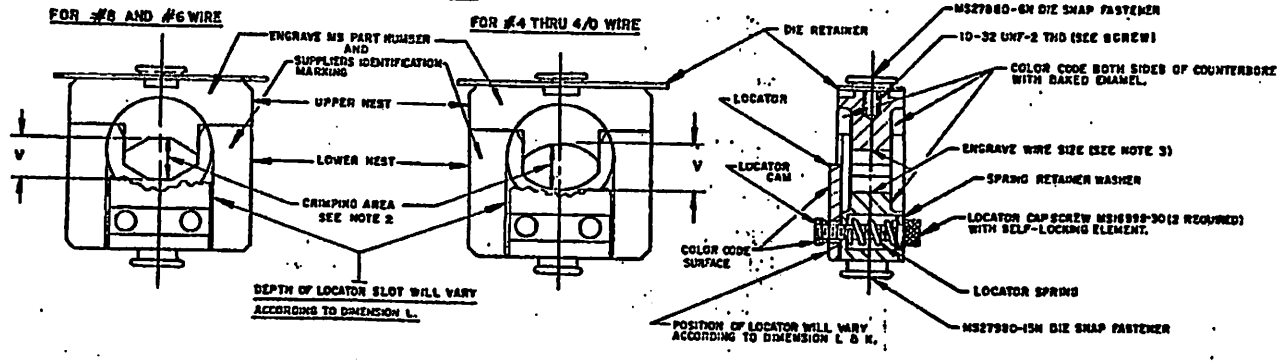

MS PART NO.	WIRE SIZE	COLOR CODE	A +.000 -.002	B +.000 -.002	C ±.002	D ±.002	E +.000 -.002	F +.000 -.002	G ±.005	H ±.005	J +.000 -.002	K +.000 -.002
MS23002-8	8	RED	1.181	1.184	.367	.361	.346	.262	.125	.250	.176	.235
MS23002-6	6	BLUE	1.210	1.213	.425	.419	.410	.339	.156	.312	.208	.274
MS23002-4	4	YELLOW	1.254	1.257	.513	.507	.470	-----	.187	.375	.216	-----
MS23002-2	2	RED	1.279	1.282	.563	.557	.532	-----	.250	.500	.220	-----
MS23002-1	1	WHITE	1.302	1.305	.610	.604	.563	-----			.224	-----
MS23002-01	1/0	BLUE	1.340	1.343	.685	.679	.626	-----	.218	.437	.256	-----
MS23002-02	2/0	YELLOW	1.375	1.378	.756	.750		-----	.281	.562	.253	-----
MS23002-03	3/0	RED	1.392	1.395	.790	.784	.657	-----			.219	-----
MS23002-04	4/0	BLUE	1.423	1.426	.852	.846		-----	.312	.625	.184	-----

MS PART NO.	L ±.005	M ±.005	P +.000 -.002	Q +.000 -.002	R +.000 -.005	V ±.002	W ±.005	X ±.015	Y ±.015	Z ±.005	ENGRAVING	GAGE NO.
MS23002-8	.502	.531	.156	.152	-----	.170	-----	-----	.093	1.156	8	MS23003-8
MS23002-6	.608	.545	.197	.187	-----	.202	-----	-----		1.050	6	MS23003-6
MS23002-4			-----	-----	.360	.254	-----	-----		1.000	4	MS23003-4
MS23002-2	.679	.616	-----	-----	.405	.312	-----	-----		.968	2	MS23003-2
MS23002-1	.686	.623	-----	-----	.440	.339	-----	-----		.937	1	MS23003-1
MS23002-01	.717	.654	-----	-----	.480	.370	-----	-----		.875	1/0	MS23003-01
MS23002-02	-----	.687	-----	-----	.535	.404	.031	.194	.062	.850	2/0	MS23003-02
MS23002-03	-----		-----	-----	.585	.438		.187	.062	.843	3/0	MS23003-03
MS23002-04	-----		-----	-----	.610	.473	.062	.157	.046	.675	4/0	MS23003-04

APPROVED 19 OCT 60 REVISED (D) 21 MAR 72

Project No. 5120-0723
FED. SUP CLASS 5136

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:46Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/usage information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
NAVY - AS
USAF - 60
ARMY - GL, MU

USER SYMBOLS:
NAVY - MC, SH, YC
ARMY - EL

P.A. NAVY - AS
Other Cust
USAF - 84
ARMY - EL
PROCUREMENT SPECIFICATION
MIL-T-22909


SUPERSEDS

TITLE
DIE, CRIMPING TOOL - FOR USE WITH MS25036, SIZE 8 THROUGH 4/0 TERMINALS


SHEET 2

MILITARY STANDARD
MS23002

FOR NOTES SEE SHEET 4

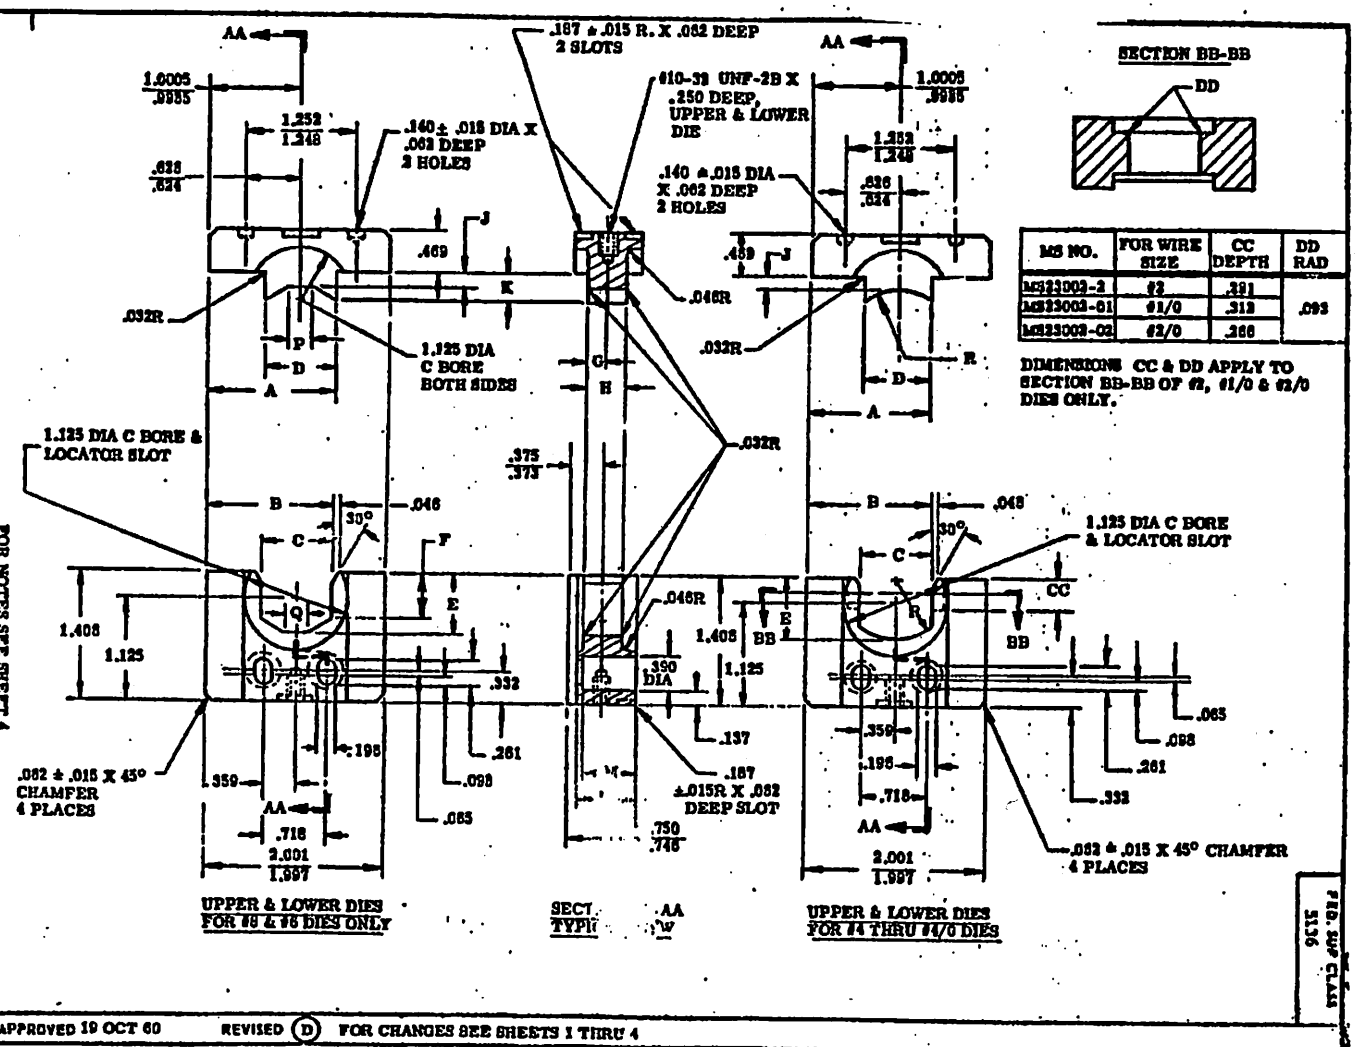

SECTION BB-BB




MS NO.	FOR WIRE SIZE	CC DEPTH	DD RAD
MS23002-2	#2	.291	.093
MS23002-01	#1/0	.313	
MS23002-02	#2/0	.366	

DIMENSIONS CC & DD APPLY TO SECTION BB-BB OF #2, #1/0 & #2/0 DIES ONLY.

FSC 5136

APPROVED 19 OCT 60 REVISED (D) FOR CHANGES SEE SHEETS 1 THRU 4

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:46Z
Check the source to verify that this is the current version before use.

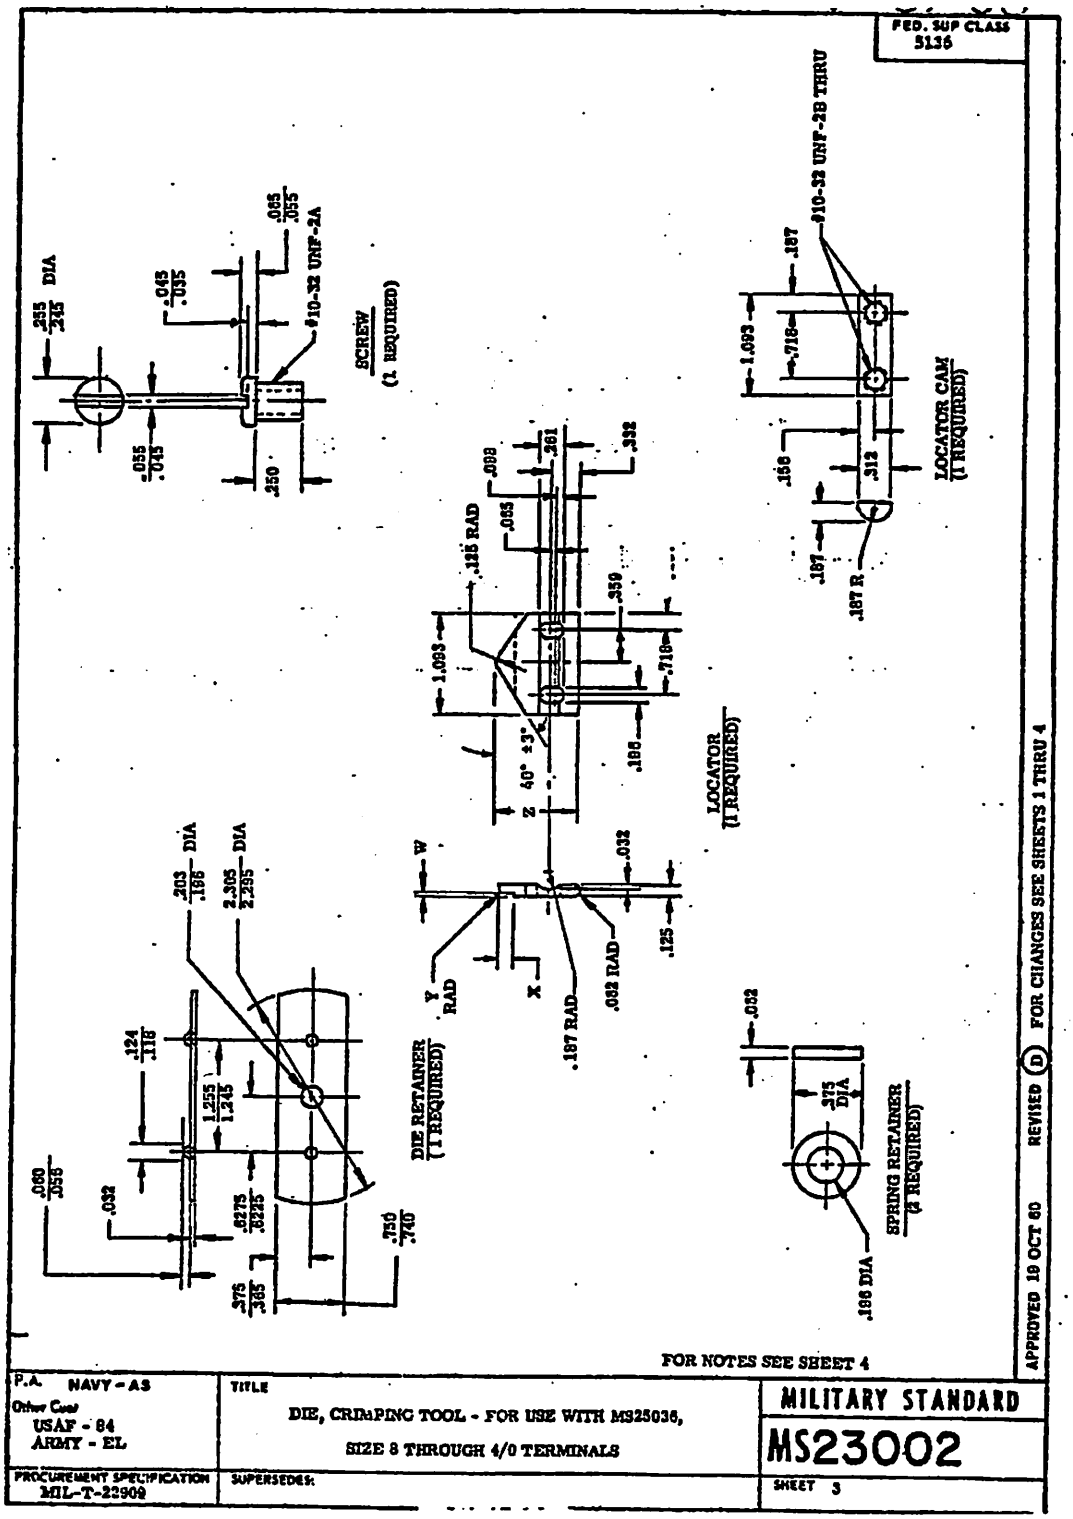

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:46Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Deletion for all non-engineering and design applications and for repetition can shall be made from this document.

"Engineering/user information is correct as of the date of this document. For future coordination of changes to this document, draft activities should be based on the information in the current DODISS."

SERVICES SYMBOLS
NAVY - AS
USAF - 80
ARMY - GL, MU

USER SYMBOLS
NAVY - MC, SH, AS
ARMY - EL

FED. SUP CLASS
5136

NOTES:

1. MATERIAL: DIES - SAE 4340, DIE RETAINER - SAE 1060 OR 1080 SPRING STEEL, LOCATOR - SAE 4140, LOCATOR CAM - SAE 4340. LOCATOR CAP SCREW - STEEL. SPRING RETAINER - SAE 1010.
2. CRIMPING AREA: POLISHED AND BUFFED, THEN CHROME PLATED & BUFFED TO A SURFACE TEXTURE OF 8/ REMAINDER OF DIE: METALLIC-CERAMIC COATED PER MIL-C-81751, TYPE 1, CLASS 1, 2, 3, OR 4.
3. WIRE SIZE ENGRAVINGS SHALL BE LOCATED CENTRALLY IN CRIMPING NEST, PARALLEL WITH WIDTH OF DIE, AND CUT TO A DEPTH OF .010 - .030. ENGRAVING TO BE AS LARGE AS PRACTICAL.
4. HEAT TREAT: DIE TO ROCKWELL C-42-46, DIE RETAINER - SPRING TEMPER. LOCATOR, LOCATOR CAM, SPRING RETAINER - NONE.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED.
   TOLERANCES: DECIMAL ±.005, ANGLES ±1°.
6. REMOVE ALL BURRS AND SHARP EDGES.
7. V DIMENSION: - SHUT HEIGHT - CHECK WITH GAGES SPECIFIED IN MS23009 (WEP)
8. IN ADDITION TO MEETING THE REQUIREMENTS OF THIS DRAWING, THE CRIMPING DIES WHEN INSTALLED IN MS25441-1 CRIMPING HEAD, SHALL BE CAPABLE OF SATISFACTORILY CRIMPING MS25036 TERMINALS SIZES 8 THROUGH 4/0 TO MEET THE REQUIREMENTS SPECIFIED IN SPEC MIL-T-7928.
9. THE GOVERNMENT DOES NOT HAVE A LICENSE UNDER U.S. PATENT NO. 2,802,257 WHICH EXPIRES ON AUG 13, 1974 AND U.S. PATENT NO. 3,009,503, WHICH EXPIRES ON NOVEMBER 20, 1978.
10. LOCATOR SPRING - 2 REQUIRED PER ASSEMBLY - 5 COILS OF .062 MUSIC WIRE - FLAT ENDS - LENGTH 5/8 - O. D. .375.
11. LOCATOR CAP SCREW - 2 REQUIRED PER ASSEMBLY #10-32UNF-2A LENGTH 7/8 MS16996-30 WITH SELF LOCKING ELEMENT.
12. UPPER DIE SNAP FASTENER - 1 REQUIRED PER ASSEMBLY - MS27980-8N.
13. LOWER DIE SNAP FASTENER - 1 REQUIRED PER ASSEMBLY - MS27980-15N.

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 18 OCT 60 REVISED (D) FOR CHANGES SEE SHEETS 1 T.

P.A. NAVY - AS Other Cust USAF - 84 ARMY - EL	TITLE DIE, CRIMPING TOOL - FOR USE WITH MS25036, SIZE 8 THROUGH 4/0 TERMINALS	MILITARY STANDARD MS23002
PROCUREMENT SPECIFICATION MIL-T-22906	SUPERSEDES	SHEET 4

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:46Z
Check the source to verify that this is the current version before use.