NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DD FORM 672-1
1 OCT 52

CUSTODIANS: AIR FORCE
OTHER INT.: A- N- AF-
PROCUREMENT SPECIFICATION: MIL-E-26248
SUPERSEDES:

MILITARY STANDARD
ENGINE-GASOLINE, TYPE GLU-1/U 30 HP PACKETTE (FORMERLY PC30)

MS24557 (USAF)

SHEET 1 OF 2

FED. SUP CLASS. 2805


NO. OF CYLINDERS 2
CYLINDER BORE 4.0625
PISTON STROKE 3.875
TOTAL DISPLACEMENT (CU.IN.) . 100
STROKES PER CYCLE 4
COOLING MEDIUM . . . . . AIR

MS PART NO.	PIIN
MS24557-1	

GENERAL NOTES:

1. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ± 0.01.


THIS STANDARD HAS BEEN APPROVED BY THE DEPARTMENT OF THE AIR FORCE AND IS MANDATORY FOR USE BY THAT DEPARTMENT.
ALL OTHER MILITARY ACTIVITIES ARE REQUIRED TO EMPLOY THIS STANDARD WHERE SUITABLE.

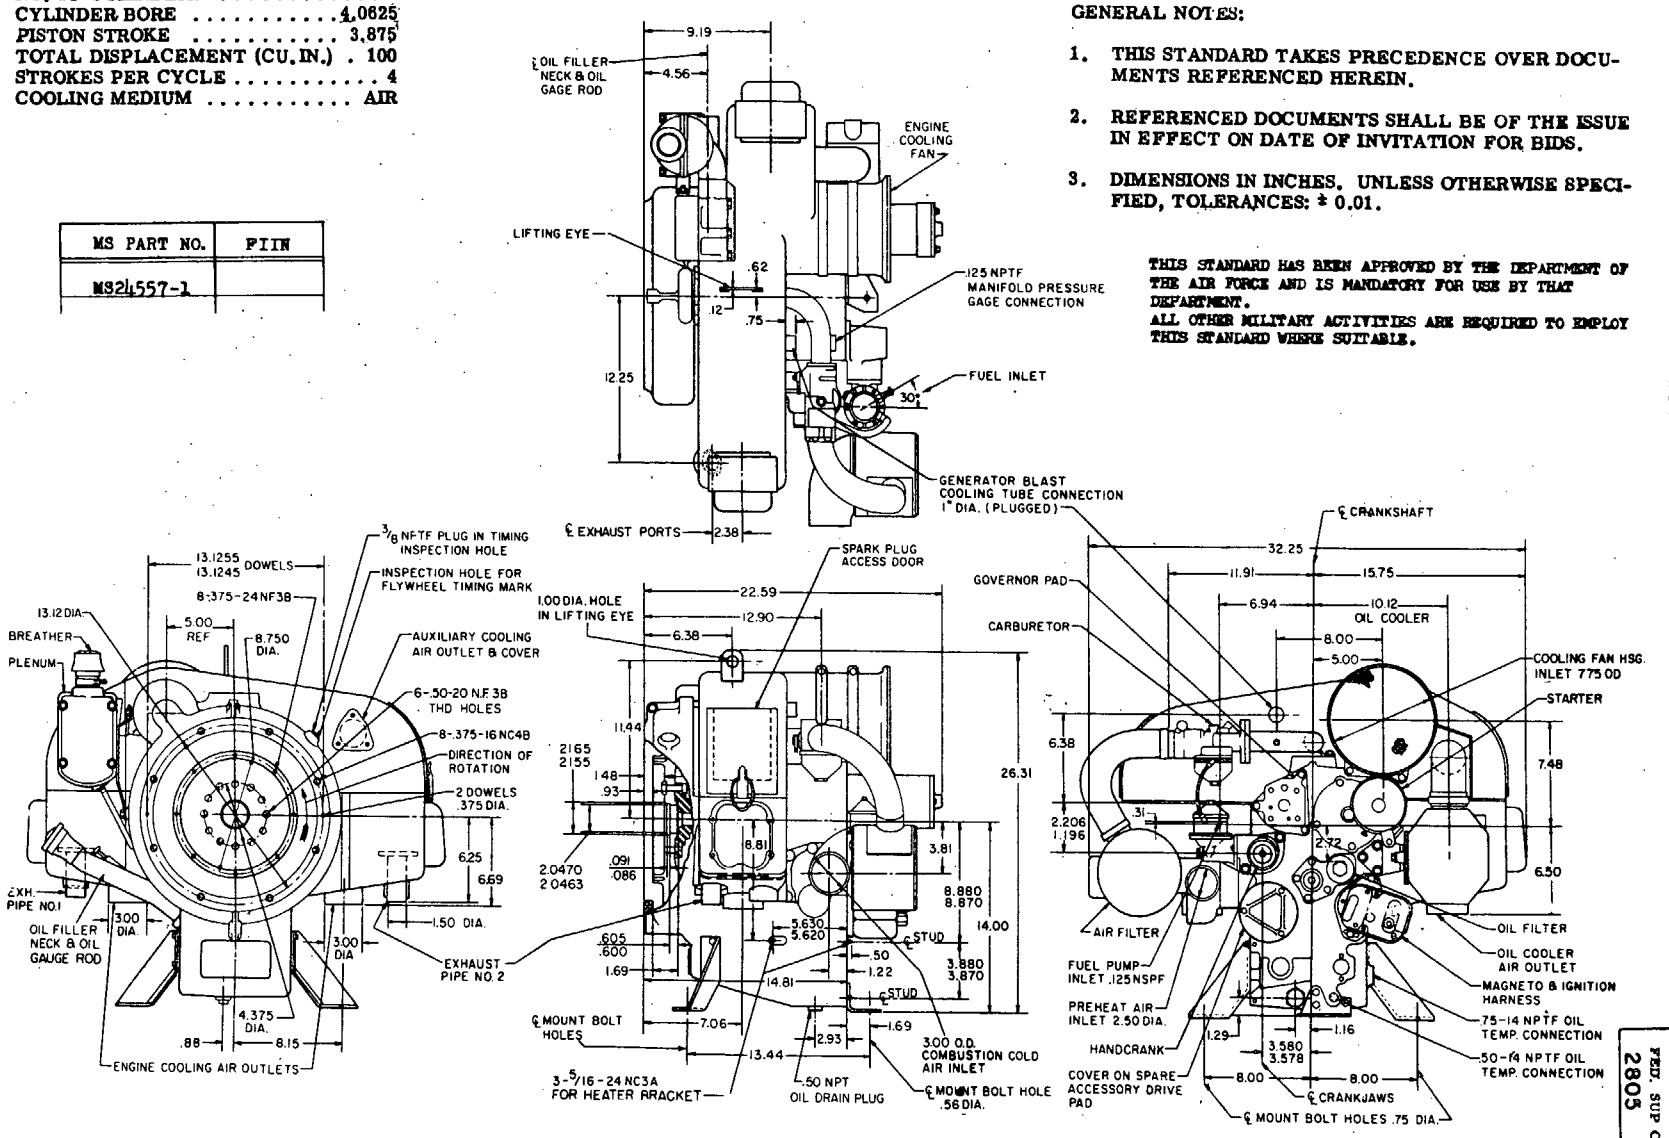


APPROVED 21 May 1959 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS.
2805

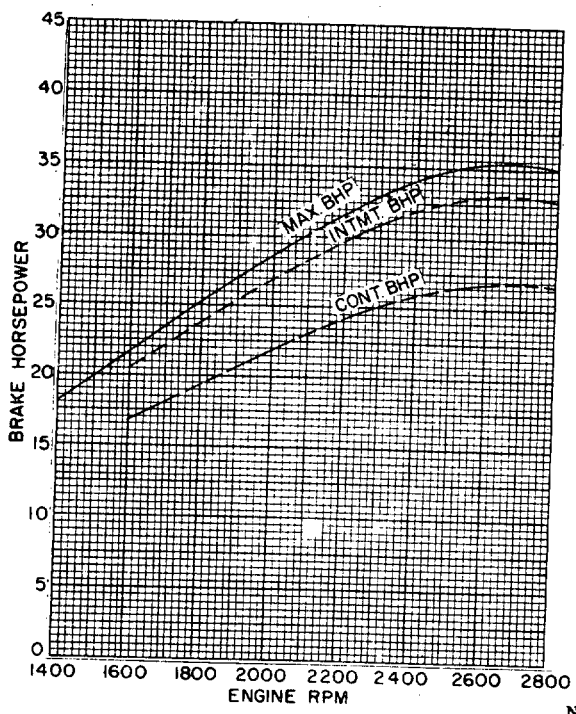

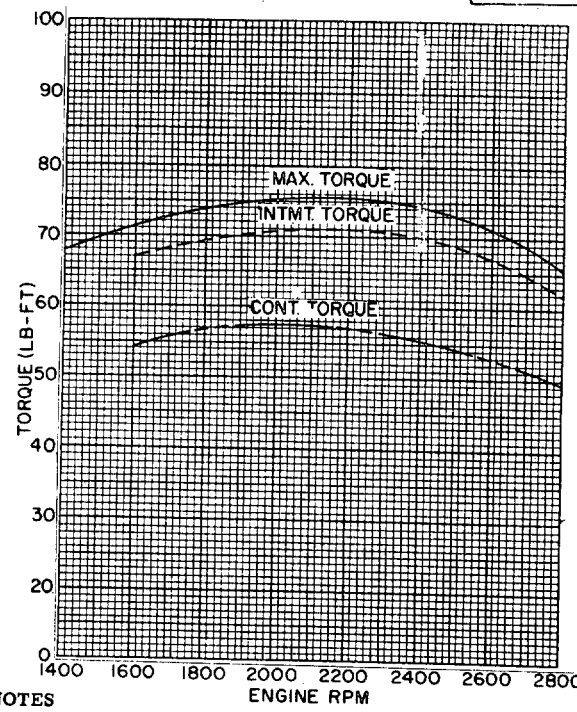

NOTES

1. DATA CORRECTED TO STANDARD CONDITIONS (29.92 IN HG, 60°F).
2. MAXIMUM HORSEPOWER AND MAXIMUM TORQUE AT WIDE OPEN THROTTLE.
3. CONTINUOUS DUTY PERFORMANCE CURVES APPLICABLE AT 6000 FT ALTITUDE.

PERFORMANCE SPECIFICATIONS

FULL THROTTLE BRAKE HORSEPOWER RATINGS			CRANKSHAFT SPEED IN RPM			FULL THROTTLE PERFORMANCE AT RATED RPM UNDER RATED LOAD		
MAXIMUM AT SEA LEVEL	ITMT DUTY	CONT DUTY	FULL THROTTLE RATED	GOVERNED	NO LOAD IDLING	INT MANIFOLD VACUUM (IN. HG)	FUEL CONS. (LB/HR)	SPECIFIC OIL CONS. (LB/BHP/HR)
34	32.0	25.8	2400	1400-2800	800-900	0.9 - 1.4	21 - 23	0.012

FUEL SPECIFICATIONS

SPECIFICATION NUMBER	GRADES FOR AMBIENT TEMPERATURE RANGES		MINIMUM OCTANE RATING
	ABOVE 0°F	BELOW 0°F	
MIL-G-5572	80 - 145	80 - 145	80
MIL-G-3056	TYPE I	TYPE II	80
VV-M-561			80

LUBRICATING OIL SPECIFICATIONS

SPECIFICATION NUMBER	VISCOSITY GRADES FOR AMBIENT TEMPERATURE RANGES	
	ABOVE 20°F	BELOW 20°F*
MIL-L-2104	30	10
SAE GRADE	30	10

* WHEN DAILY TEMPERATURES RANGE ABOVE AND BELOW 20°F, USE HIGHER VISCOSITY.

WEIGHTS

TOTAL DRY WEIGHT (MAXIMUM) . . . . . 288.0 LB

ACCESSORIES INCLUDED

ELECTRIC CRANKING MOTOR . . . . . 24 VOLT
FUEL PUMP, ENGINE DRIVEN . . . . . 4-5.75 PSI
CARBURETOR . . . . . 1 BARREL
MAGNETO, RADIO SHIELDED
IGNITION CABLES, RADIO SHIELDED . . . . . 5 MM
SPARK PLUGS, RADIO SHIELDED . . . . . 18 MM

CAPACITIES

OIL SUMP CAPACITY (U.S. QUARTS) 4.5

RELATED DOCUMENTS

CONTINENTAL MOTORS CORP. DRAWING NO. 627093

APPROVED 21 MAY 1959 REVISED

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS24557 (USAF)
AIR FORCE	A - N - AF -	ENGINE-GASOLINE, TYPE GLU-1/U 30 HP PACKETTE (FORMERLY PC30)	
PROCUREMENT SPECIFICATION MIL-E-26248	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1172-1
1 OCT 62

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.

GPO 829746