
FED. SUP CLASS
5340

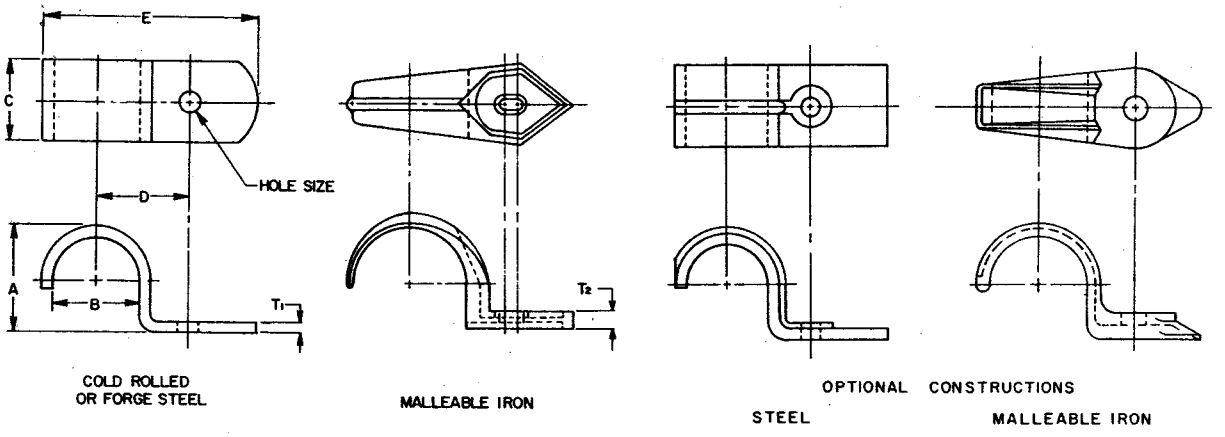

COLD ROLLED OR FORGE STEEL

MALLEABLE IRON

OPTIONAL CONSTRUCTIONS

STEEL

MALLEABLE IRON

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	PIPE OR CONDUIT	CABLE OUTSIDE DIAMETER	A +.000 -.062	B 2/	C ±.125	D ±.062	E ±.125	HOLE SIZE +.031 -.015	T_1 ±.031	T_2 ±.031
-2	---	.250	.250	.250	.625	.500	.938	.219	.063	1/
-5	.125	.406	.406	.405	.625	.578	1.250	.219	.063	1/
-6	.250	.531	.531	.540	.625	.656	1.313	.219	.078	1/
-8	---	.625	.625	.625	.625	.750	1.375	.219	.078	.219
-9	.375	.688	.656	.675	.688	.844	1.813	.281	.078	.219
-10	.500	.844	.844	.840	.750	.938	2.063	.281	.078	.219
-12	.750	1.063	1.031	1.050	.750	1.063	2.438	.281	.078	.281
-14	1.000	1.313	1.313	1.315	.875	1.281	2.750	.281	.094	.313
-16	1.250	1.656	1.656	1.660	1.000	1.641	3.375	.344	.094	.344
-18	1.500	1.906	1.906	1.900	1.125	1.719	4.000	.406	.125	.500
-19	2.000	2.375	2.375	2.375	1.250	2.250	5.125	.469	.125	.531
-20	2.500	2.875	2.875	2.875	1.625	2.750	6.438	.563	.250	.719
-21	3.000	3.500	3.500	3.500	1.750	3.063	7.125	.563	.250	.781
-22	3.500	4.000	4.000	4.000	1.875	3.500	8.125	.656	.250	.844
-23	4.000	4.500	4.500	4.500	2.000	3.750	8.750	.656	.250	.906
-25	5.000	5.625	5.625	5.625	2.250	4.500	10.438	.656	.375	1.031

1/ NOT AVAILABLE
2/ SEE REQUIREMENT 5

(D) ENTIRE STANDARD REVISED

APPROVED 12 JUN 53 REVISED (D) 12 FEB 87

USER ACTIVITIES: ARMY-ER, ME NAVY-MC

CIVIL AGENCY COORDINATING ACTIVITIES: GSA-FSS

REVIEWER ACTIVITIES: ARMY-GL, MI AIR FORCE-82 DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

AMSC N/A

P. A. ARMY-AR Other Cust NAVY-YD AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STRAP, RETAINING, ONE HOLE FOR PIPE, RIGID CONDUIT AND CABLE	MILITARY STANDARD MS35140
PROCUREMENT SPECIFICATION FF-S-760	SUPERSEDES: BLAXI		PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:102
Check the source to verify that this is the currenversion before use.

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5340-1715

REQUIREMENTS:

1. MATERIAL: STEEL, CARBON COLD ROLLED, SHEET IN ACCORDANCE WITH ASTM A366/ASTM A366M; FORGING STEEL IN ACCORDANCE WITH MIL-S-46172; OR IRON CASTINGS, MALLEABLE IN ACCORDANCE WITH ASTM A47.

2. PROTECTIVE COATING: CADMIUM PLATED (ELECTRODEPOSITED) IN ACCORDANCE WITH QQ-P-416, CLASS 1, TYPE II; OR ZINC COATED (ELECTRODEPOSITED) IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS Fe/Zn 13.

3. HOLE LOCATION: THE HOLE SHALL BE LOCATED FROM A SIDE ONE-HALF OF DIMENSION C.

4. EDGES: STRAP SHALL BE FREE OF BURRS AND SHARP EDGES.

5. TOLERANCES: DIMENSION B, TOLERANCE $^{+.000}_{-.062}$ FOR A STEEL STRAP; $^{+.062}_{-.000}$ FOR A MALLEABLE IRON STRAP.

6. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS35140-5

- MS35140 — BASIC MS NUMBER
- -5 — DASH NUMBER

MS35140-5 INDICATES: STRAP, RETAINING, ONE HOLE FOR PIPE, RIGID CONDUIT AND CABLE; PIPE OR CONDUIT .125; CABLE OUTSIDE DIAMETER .406; HOLE SIZE .219.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. ELONGATION OF THE HOLE IS OPTIONAL.
3. STRAP CORRESPONDS TO TYPE I, STYLE A AND B, PIPE OR CONDUIT, OF THE PROCUREMENT SPECIFICATION.
4. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
5. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

CROSS REFERENCE

TABLE II

FORMER PART NUMBER	REPLACEMENT PART NUMBER
MS35140-1	NONE
MS35140-3	NONE
MS35140-4	NONE
MS35140-7	NONE
MS35140-11	MS51956-2
MS35140-13	NONE
MS35140-15	NONE
MS35140-17	NONE
MS35140-24	NONE
MS35140-26	NONE

APPROVED 12 JUN 53 REVISED (D) FOR CHANGES SEE PAGES 1 AND 2

REVIEWER ACTIVITIES: CIVIL AGENCY COORDINATING ACTIVITIES: USER ACTIVITIES:
ARMY-GL, MI
AIR FORCE-82
DLA-IS
GSA-FSS
ARMY-ER, ME
NAVY-MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:10Z
Check the source to verify that this is the current version before use.