
FED. SUP CLASS
3120

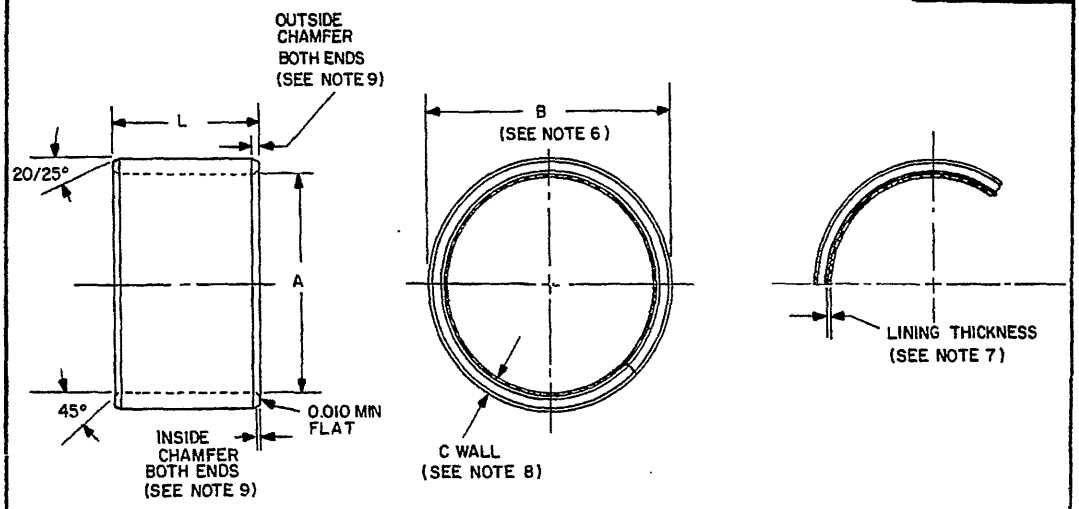

1. MATERIAL: BEARINGS ARE TYPE II, STYLE I, CLASS 2 OF MIL-B-13506. BACK: STEEL, SHEET AND STRIP, LOW CARBON PER QQ-S-698. LINER: LEADED BRONZE USING SAE MATERIAL DESIGNATION 792, 793, OR 794.
2. FINISH: SHAFT OD. 16 MICROINCHES RHR OR LESS; BEARING ID 32 MICROINCHES RHR OR LESS; BEARING OD 63 MICROINCHES RHR OR LESS AS INTERPRETED IN ANSI B-46.1 SURFACE TEXTURE (SURFACE ROUGHNESS, WAVINESS AND LAY).
3. WORKMANSHIP: ALL BEARINGS ARE INTENDED TO BE REAMED OR FINISH BORED AFTER ASSEMBLY, FOR DESIGN CLEARANCE OVER NOMINAL FRACTIONAL SIZE SHAFTS. SHARP TOOLS SHALL BE USED TO MAINTAIN POROSITY.
4. DIMENSIONS: ALL DIMENSIONS ARE IN INCHES OR DEGREES.
5. TOLERANCES: TOLERANCES ARE IN ACCORDANCE WITH ANSI Y14.5 (DIMENSIONING AND TOLERANCING FOR ENGINEERING DRAWINGS). (TOLERANCES ARE TOTAL UNLESS SPECIFIED AS ±)
6. THE OUTSIDE DIAMETER IS MEASURED WITH THE SPLIT CLOSED. DIAMETER TOLERANCES UP TO 2.5" OD IS 0.0010, OVER 2.5" OD 0.0015.
7. LINING THICKNESS DIMENSION RANGES ARE: 0.017 TO 0.025 FOR 1/16 WALL AND 0.024 TO 0.030 FOR 3/32 WALL. MINIMUM THICKNESS AFTER FINISHING IN PLACE: 0.013 FOR 1/16 WALL; 0.020 FOR 3/32 WALL.
8. ROUGH WALL DIMENSIONS AS FURNISHED BY THE MANUFACTURER ARE: 0.068 TO 0.071 FOR 1/16 WALL AND 0.100 TO 0.104 FOR 3/32 WALL.
9. CHAMFER FOR: 1/16 WALL: OUTSIDE 0.030 TO 0.050 AND INSIDE 0.010 TO 0.030
   3/32 WALL: OUTSIDE 0.045 TO 0.075 AND INSIDE 0.015 TO 0.045
10. THE SUGGESTED MINIMUM PRESS FIT FOR BUSHINGS IS; 0.003 FOR 1" OD, 0.004 FOR 2" OD, AND 0.005 FOR 3" OD.
11. PART NUMBERS: THE PART NUMBER CONSISTS OF MS AND THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 35794-101
12. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
13. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

REDRAWN (A)

P.A. NAVY - OS Other Cust AIR FORCE - 11	TITLE BEARING, SLEEVE, STEEL-BACKED BIMETAL, SPLIT TYPE, ONE PIECE	MILITARY STANDARD MS 35794
PROCUREMENT SPECIFICATION MIL-B-13506	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

APPROVED 3 AUG 1956 REVISED (A) 3 NOVEMBER 1972

USER SYMBOLS: ARMY: AT NAVY: AS

REVIEWER SYMBOLS: NAVY: SH DSA: IS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.

REVIEWER SYMBOLS: USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

A NOMINAL SHAFT SIZE B OUTSIDE DIAMETER-0.0010 HOUSING BORE ± 0.0005 C WALL THICKNESS NOM L LENGTH ± 0.010	1/2 .6285 .5000 1/16 DASH NO.	9/16 .6910 .6875 1/16 DASH NO.	5/8 .7540 .7500 1/16 DASH NO.	11/16 .8165 .8125 1/16 DASH NO.	3/4 .8795 .8750 1/16 DASH NO.	7/8 1.0045 1.0000 1/16 DASH NO.	1 1.1300 1.1250 1/16 DASH NO.	1-1/8 1.2550 1.2500 1/16 DASH NO.	1-1/4 1.3805 1.3750 1/16 DASH NO.	1-3/8 1.5055 1.5000 1/16 DASH NO.	1-1/2 1.6305 1.6250 1/16 DASH NO.	1-3/4 1.8810 1.8750 1/16 DASH NO.	1-3/4 1.9435 1.9375 3/32 DASH NO.
1/4	20	31	41	52	63	75	87	100	113	127	141	156	170
3/8	21	32	42	53	64	76	88	101	114	128	142	157	171
1/2	22	33	43	54	65	77	89	102	115	129	143	158	172
5/8	23	34	44	55	66	78	90	103	116	130	144	159	173
3/4	24	35	45	56	67	79	91	104	117	131	145	160	174
7/8	25	36	46	57	68	80	92	105	118	132	146	161	175
1	26		47	58	69	81	93	106	119	133	147	162	176
1-1/4					70	82	94	107	120	134	148	163	177
1-1/2							95	108	121	135	149	164	178
1-3/4									122	136	150	165	179
2											151		
2-1/4													
2-1/2													
2-3/4													
3													

A NOMINAL SHAFT SIZE B OUTSIDE DIAMETER-0.0015 HOUSING BORE ± 0.0005 C WALL THICKNESS NOM. L LENGTH ± 0.010	2 2.1310 2.1250 1/16 DASH NO.	2 2.1935 2.1875 3/32 DASH NO.	2-1/4 2.3815 2.3750 1/16 DASH NO.	2-1/4 2.4440 2.4375 3/32 DASH NO.	2-1/2 2.6320 2.6250 1/16 DASH NO.	2-1/2 2.6945 2.6875 3/32 DASH NO.	2-3/4 2.8820 2.8750 1/16 DASH NO.	2-3/4 2.9445 2.9375 3/32 DASH NO.	3 3.1320 3.1250 1/16 DASH NO.	3 3.1945 3.1875 3/32 DASH NO.
1/4	184	197	210	222	234	246	258	269	280	291
3/8	185	198	211	223	235	247	259	270	281	292
1/2	186	199	212	224	236	248	260	271	282	293
5/8	187	200	213	225	237	249	261	272	283	294
3/4	188	201	214	226	238	250	262	273	284	295
7/8	189	202	215	227	239	251	263	274	285	296
1	190	203	216	228	240	252	264	275	286	297
1-1/4	191	204	217	229	241	253				
1-1/2	192	205								
1-3/4										
2										
2-1/4										
2-1/2										
2-3/4										
3										

FED. SUP CLASS 3120

APPROVED 3 AUGUST 1956 REVISED (A) FOR CHANGES SEE SHEETS 1 & 2

P.A. NAVY - OS Other Cust AIR FORCE - 11	TITLE BEARING, SLEEVE, STEEL-BACKED BIMETAL, SPLIT TYPE, ONE PIECE	MILITARY STANDARD MS 35794
PROCUREMENT SPECIFICATION MIL-B-13506	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:28Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MS 35794 Bearing, Sleeve, Steel-Backed Bimetal, Split Type, One Piece

ORGANIZATION

CITY AND STATE	CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*	DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.