MILITARY SPECIFICATION SHEET
FILTER ELEMENTS, HYDRAULIC, DISPOSABLE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-24702(SH).

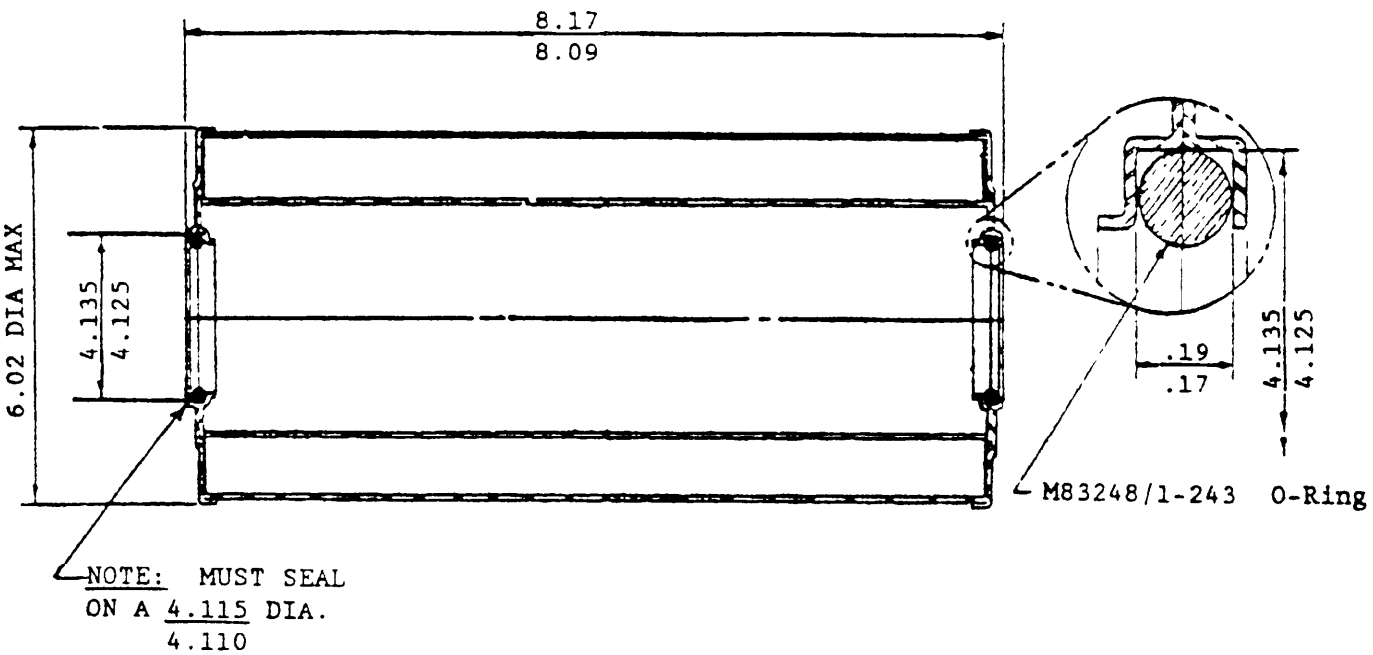

FIGURE 1. Filter element

Notes:

1. Dimensions are in inches unless otherwise specified.
2. Material shall be in accordance with the general specification.
3. Seals shall be in accordance with MIL-R-83248 and MIL-R-83248/1, and shall be MIL-R-83248/l-243 size.
4. Quality conformance inspection for each element acquisition shall be in accordance with 4.4 of this specification.
5. Test fluid shall be with antistatic additives.

AMSC N/A FSC 4330
DISTRIBUTION STATEMENT A. Approval for public release: Distribution unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. The filter element shall be in accordance with figure 1.
2. Rated flow in accordance with MIL-H-17672, 2075 TH fluid at 40° C temperature: 50 gal/rein.
3. Minimum Beta Ratio for beta size 20 (B_{20}): 75
4. Powder Technology, Inc. (PTI) Test Dust Capacity: 85 grams.
5. Terminal pressure drop: 50 psi at rated flow.
6. Clean element pressure drop at rated flow and 32 centistoke (minimum) viscosity: 1.5 psi maximum.
7. Collapse burst pressure: 150 psi maximum.
8. Bubble point: 9 inches of water minimum.
9. Flow fatigue cycles: 50,000 cycles.

PART NUMBER:

The part number for the filter element shall consist of the basic number of the specification sheet number.

Example:

M24702/2 FILTER ELEMENT

Preparing activity:
Navy - SH
(Project 4330-N113)

Source: https://assist.dla.mil -- Downloaded: 202610-20T01:07Z
Check the source to verify that this is the current version before use.