
MS9962

FED. SUP CLASS
5306

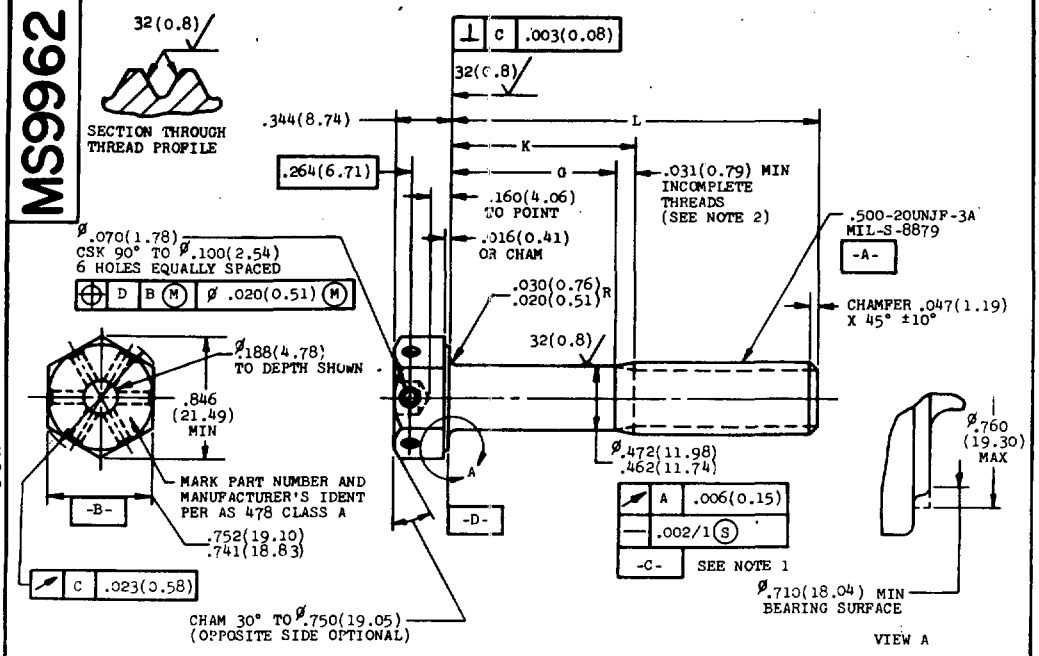

1. FOR PART NUMBERS MS9962-03 THRU MS9962-24 THE THREAD PD SHALL REPLACE DATUM C.
2. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. MATERIAL: STEEL AMS 6322.
4. HARDNESS: ROCKWELL C26-32.
5. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
6. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD SHALL BE UPSET.
7. HEAD TO SHANK FILLET SHALL BE COLD WORKED.
8. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
9. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES (3.2 MICROMETERS) EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 (0.08-0.38) UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. METRIC CONVERSIONS ARE IN PARENTHESES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010 (0.25), ANGULAR DIMENSIONS ±5°. INTERNATIONAL SYSTEM UNITS (SI) SHOWN ARE FOR REFERENCE ONLY.
12. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1966, Ø = DIAMETER.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 27 Jun 74 REVISED

User activities: Army, Navy, Air Force, DSA

Review activities: Army, Navy, Air Force, DSA

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Air Force - 11 Other Cust Army - AV Navy - AS	TITLE BOLT, MACHINE, HEXAGON HEAD, DRILLED, 6 HOLE, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .500-20UNJF-3A	MILITARY STANDARD MS9962
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5306-0497

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:29Z
Check the source to verify that this is the current version before use.

MS9962

FED. SUP CLASS
5306

User activities:
Army
Navy
Air Force
DSF

Review activities:
Army
Navy
Air Force
DSF

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PART NUMBER	L		G MIN		K MAX		APPROX MASS	
	IN.	(mm)	IN.	(mm)	IN.	(mm)	LB/100	kg/100
MS9962-03	.750	19.05	.030	0.77	.125	3.17	7.99	3.624
MS9962-04	.812	20.62	.030	0.77	.125	3.17	8.28	3.756
MS9962-05	.875	22.22	.030	0.77	.125	3.17	8.59	3.896
MS9962-06	.938	23.82	.030	0.77	.125	3.17	8.90	4.037
MS9962-07	1.000	25.40	.030	0.77	.125	3.17	9.21	4.178
MS9962-08	1.062	26.97	.030	0.77	.125	3.17	9.52	4.318
MS9962-09	1.125	28.58	.030	0.77	.125	3.17	9.82	4.454
MS9962-10	1.188	30.18	.030	0.77	.125	3.17	10.12	4.590
MS9962-11	1.250	31.75	.030	0.77	.125	3.17	10.42	4.726
MS9962-12	1.312	33.32	.030	0.77	.156	3.17	10.73	4.867
MS9962-13	1.375	34.92	.030	0.77	.156	3.17	11.03	5.003
MS9962-14	1.438	36.52	.030	0.77	.188	4.77	11.33	5.139
MS9962-15	1.500	38.10	.090	2.29	.250	6.35	11.63	5.275
MS9962-16	1.562	39.67	.152	3.87	.312	7.92	11.93	5.411
MS9962-17	1.625	41.28	.215	5.47	.375	9.52	12.24	5.552
MS9962-18	1.688	42.88	.278	7.07	.438	11.12	12.54	5.688
MS9962-19	1.750	44.45	.340	8.64	.500	12.70	12.84	5.824
MS9962-20	1.812	46.03	.402	10.22	.562	14.27	13.14	5.960
MS9962-21	1.875	47.62	.465	11.82	.625	15.88	13.44	6.096
MS9962-22	1.938	49.22	.528	13.42	.688	17.47	13.74	6.232
MS9962-23	2.000	50.80	.590	14.99	.750	19.05	14.05	6.373
MS9962-24	2.125	53.98	.715	18.17	.875	22.22	14.65	6.645
MS9962-25	2.250	57.15	.840	21.34	1.000	25.40	15.26	6.922
MS9962-26	2.375	60.32	.965	24.52	1.125	28.57	15.86	7.194
MS9962-27	2.500	63.50	1.090	27.69	1.250	31.75	16.47	7.471
MS9962-28	2.625	66.67	1.215	30.87	1.375	34.92	17.07	7.743
MS9962-29	2.750	69.85	1.340	34.04	1.500	38.10	17.67	8.015
MS9962-30	2.875	73.02	1.465	37.22	1.625	41.27	18.26	8.292

PART NUMBER	L		G MIN		K MAX		APPROX MASS	
	IN.	(mm)	IN.	(mm)	IN.	(mm)	LB/100	kg/100
MS9962-31	3.000	76.20	1.590	40.39	1.750	44.45	18.88	8.564
MS9962-32	3.125	79.38	1.715	43.57	1.875	47.62	19.49	8.840
MS9962-33	3.250	82.55	1.840	46.74	2.000	50.80	20.09	9.113
MS9962-34	3.375	85.72	1.965	49.92	2.125	53.97	20.70	9.389
MS9962-35	3.500	88.90	2.090	53.09	2.250	57.15	21.30	9.662
MS9962-36	3.625	92.08	2.215	56.27	2.375	60.32	21.90	9.934
MS9962-37	3.750	95.25	2.340	59.44	2.500	63.50	22.51	10.210
MS9962-38	3.875	98.42	2.465	62.62	2.625	66.67	23.11	10.482
MS9962-39	4.000	101.60	2.590	65.79	2.750	69.85	23.72	10.759
MS9962-40	4.125	104.78	2.715	68.97	2.875	73.02	24.32	11.031
MS9962-41	4.250	107.95	2.840	72.14	3.000	76.20	24.92	11.304
MS9962-42	4.375	111.12	2.965	75.32	3.125	79.37	25.53	11.580
MS9962-43	4.500	114.30	3.090	78.49	3.250	82.55	26.13	11.852
MS9962-44	4.625	117.47	3.215	81.67	3.375	85.72	26.74	12.129
MS9962-45	4.750	120.65	3.340	84.84	3.500	88.90	27.84	12.628
MS9962-46	4.875	123.82	3.465	88.02	3.625	92.07	27.95	12.678
MS9962-47	5.000	127.00	3.590	91.09	3.750	95.25	28.55	12.950
MS9962-48	5.125	130.18	3.715	94.37	3.875	98.42	29.15	13.222
MS9962-49	5.250	133.35	3.840	97.54	4.000	101.60	29.76	13.499
MS9962-50	5.375	136.52	3.965	100.72	4.125	104.77	30.36	13.771
MS9962-51	5.500	139.70	4.090	103.89	4.250	107.95	30.97	14.048
MS9962-52	5.625	142.88	4.215	107.07	4.375	111.12	31.57	14.320
MS9962-53	5.750	146.05	4.340	110.24	4.500	114.30	32.18	14.597
MS9962-54	5.875	149.22	4.465	113.42	4.625	117.47	32.78	14.869
MS9962-55	6.000	152.40	4.590	116.59	4.750	120.65	33.38	15.141

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 27 Jun 74 REVISED

P.A. Air Force - 11
Other Cust
Army - AV
Navy - AS

TITLE
BOLT, MACHINE, HEXAGON HEAD, DRILLED, 6 HOLE, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .500-20UNJF-3A

MILITARY STANDARD
MS9962

PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 SEP 67 672-1
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5306-0497

☆U.S. GOVERNMENT PRINTING OFFICE: 1974—603-109/1180

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:29Z
Check the source to verify that this is the current version before use.