INCH-POUND
MIL-DTL-24231/27F(SH)
26 April 2013
SUPERSEDING
MIL-C-24231/27E(SH)
15 May 1987

DETAIL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, MULTI-PIN, TYPE V, FOR TYPE LS2SWU-1 CABLE

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24231.

REQUIREMENTS:

1. Dimensions and configuration: see figure 1.
2. All dimensions are in inches.
3. Tolerances shall be as follows, or as stated:

a. Decimals – ±0.005 inch.
b. Fractions – ±1/64 inch.
c. Angular dimensions – ±½ degree.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

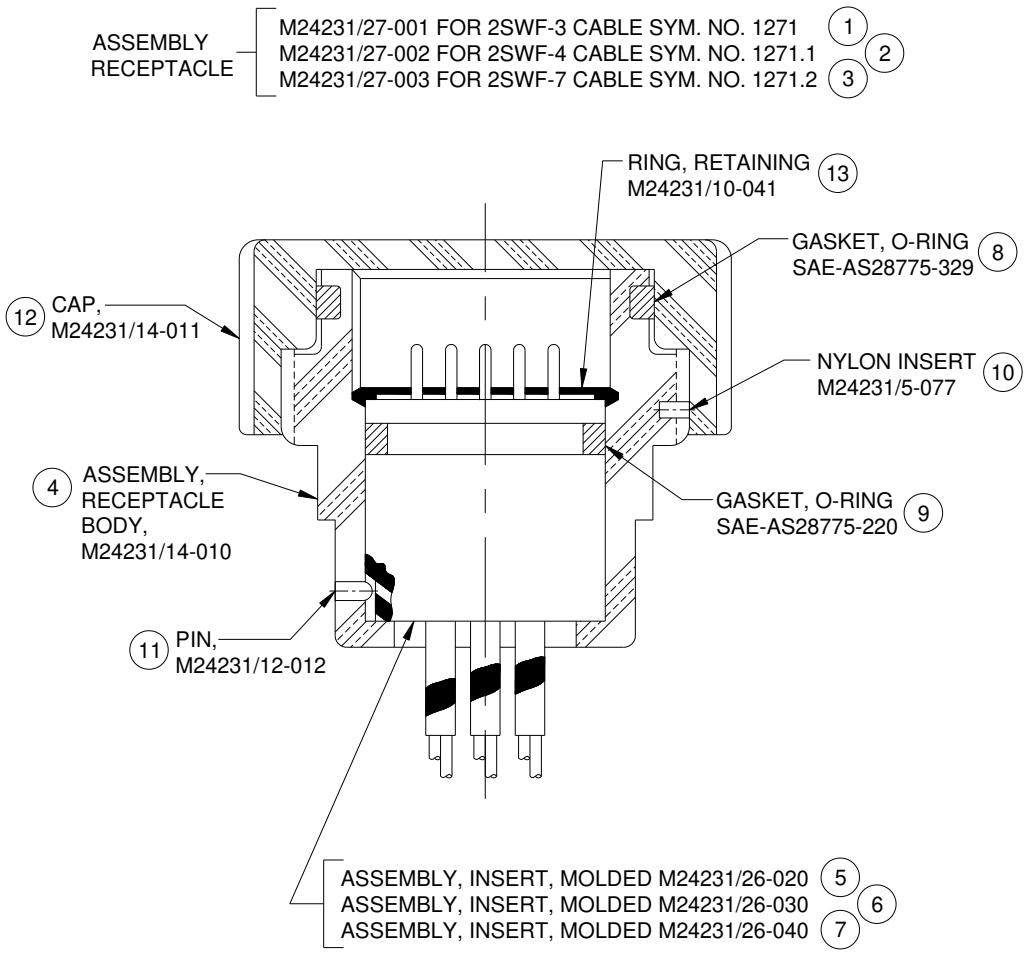


FIGURE 1. Connector, multi-pin receptacle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item no. 1/	Description 2/	Quantity for M24231/27- 3/			Material/specification	Remarks
		001	002	003		
1	Connector, receptacle, symbol no. 1271	1			-----	See figure 1.
2	Connector, receptacle, symbol no. 1271.1		1		-----	See figure 1.
3	Connector, receptacle, symbol no. 1271.2			1	-----	See figure 1.
4	Body, receptacle	1	1	1	M24231/14-010	See figure 1.
5	Insert, molded	1			M24231/26-020	See figure 1.
6	Insert, molded		1		M24231/26-030	See figure 1.
7	Insert, molded			1	M24231/26-040	See figure 1.
8	Gasket, O-ring	1	1	1	SAE-AS28775-329 4/	Lubricate with silicone compound, SAE-AS8660; see figure 1.
9	Gasket, O-ring	1	1	1	SAE-AS28775-220 4/	See item 8.
10	Insert	1	1	1	M24231/5-077	See figure 1.
11	Pin, guide	1	1	1	M24231/12-012	See figure 1.
12	Cap, pressure-proof	1	1	1	M24231/14-011	See figure 1.
13	Ring, retaining	1	1	1	M24231/10-041	See figure 1.

NOTES:

1/ Item numbers are the same as encircled numbers shown on figures.

2/ See applicable figure or table listed in remarks column for part numbers and dimensions.

3/ Quantity is for one complete assembly of each size.

4/ Nitrile (Buna N); Parker Hannifin Corporation (part number N0756-75), O-ring Division, 2360 Palumbo Drive, Lexington, KY 40509, CAGE 02697, or equal.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy – SH
(Project 5935-2011-076)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.