INCH-POUND

MIL-DTL-55422/1A
15 December 2001
SUPERSEDING
MIL-C-55422/1
23 February 1965

DETAIL SPECIFICATION SHEET

CLIP, ELECTRICAL, GRID

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-DTL-55422.

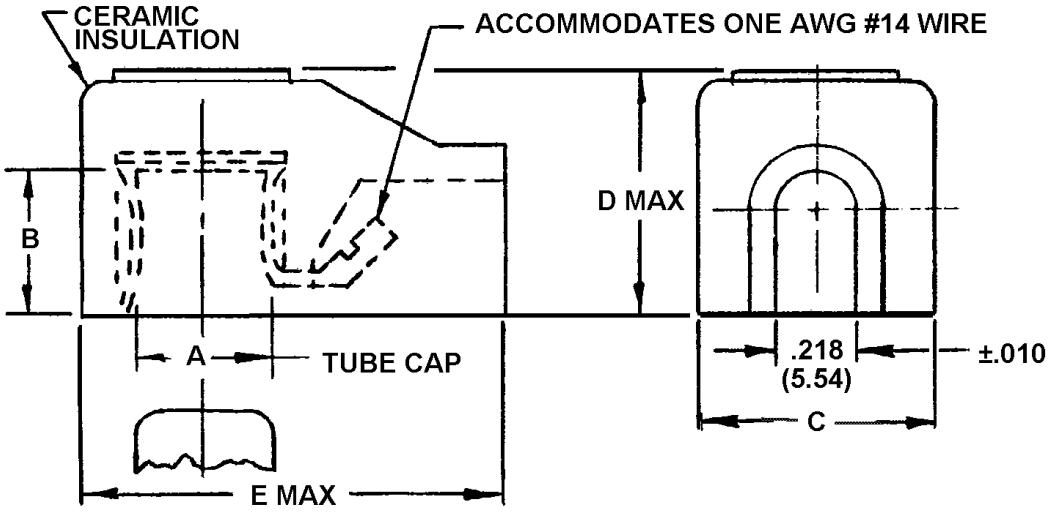

NOTES:
1. Dimensions are in inches; metric millimeter equivalents are given in parenthesis and are for general information only.
2. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.
3. Material - beryllium-copper alloy. Finish tin plate.Tolerance on flash shall be ±.008 (0.20 mm) on the extension and ±.005 (0.13 mm) on the thickness.

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configurations: See figure 1 and table I.

Retaining and release force: 5 lbs. minimum; 15 lbs. maximum.

Finish: Electrodeposited tin-plate.

Part or Identifying Number (PIN): See table I.

TABLE I. Dimensions and force.

Dash number	Dimensions (see figure)					Retaining and release force	
	A ± .005 (.13)	B	C ± .010 (.25)	D Max.	E ± .010 (.25)	Lbs. Max.	Lbs. Min.
-01	.250 (6.35)	.301 ±.005 (7.65 ±.13)	.625 (15.88)	.575 (14.61)	1.125 (28.58)	16.7	5
-02	.360 (9.14)	.383 ±.030 (9.73 ±.76)	.641 (16.28)	.575 (14.61)	1.141 (28.98)	16.7	5
-03	.566 (14.38)	.500 +.015 (12.70 +.38	.828 (21.03)	.807 (20.51)	1.484 (37.69)	53.5	6.67

1/ "XX" in the PIN shall be replaced by the applicable dash number. Complete PIN example: M55422/1-XX.

Custodian:
Army - CR
Navy - SH
Air Force - 11
DLA - CC

Review activities:
Air Force - 99
DLA - GS

Preparing activity:
DLA - CC

(Project 5999-0376-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.