INCH-POUND

A-A-54845
18 June 1993

COMMERCIAL ITEM DESCRIPTION

HAMMER, REFLEX TESTING, Taylor

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Federal Specification GG-H-1212A, which is cancelled.

This Commercial Item Description covers Taylor type reflex testing hammers.

Salient characteristics:

General. The instrument shall be a percussion hammer of the Taylor design suitable for reflex testing.

Materials. The reflex hammer head shall be of natural rubber, synthetic rubber, or other elastomer suitable for the intended purpose. The metal parts of the reflex testing hammer shall be a corrosion-resistant material. The base metal shall be an austenitic steel Types 301, 302, or 303, cartridge brass, yellow brass, composition II brass, free cutting brass or die cast zinc brass alloy AG40A. All metal parts that are not austenitic steel shall be nickel and chromium plated.

Style, design and dimensions. The reflex testing hammer shall consist of a triangular rubber head attached to a handle, shank and loop. The handle, shank and loop shall be of one-piece construction.

The percussion head shall be designed as a replaceable item. The head shall be securely attached to the loop. Should the percussion head be constructed of more than one piece, the pieces shall be permanently joined together and all seams shall be smooth. The style and design shall be in accordance with Figure 1.

The metal parts of the reflex testing hammer shall be properly ground to remove all surface imperfections and polished to remove grind marks, resulting in a mirror finish.

AMSC N/A FSC 6515

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

Hardness. The metal parts shall have Rockwell hardness of B-75 to B-85. The head of the reflex hammer shall have a durometer hardness of A 40 - A 50 shore.

Marking. Each reflex testing hammer shall be marked with the name or registered trademark of the contractor. When the reflex testing hammer is of foreign manufacture, it shall be marked with the name of the country of origin. When the handle is fabricated from austenitic steel, it shall be marked stainless.

Testing. Durometer hardness shall be determined in accordance with ASTM Test Method D-2240. A minimum of ten hardness readings shall be on samples fabricated from the same batch material used in the manufacturer of the reflex hammer head.

Workmanship. The reflex testing hammer shall be free from defects which detract from its appearance or impair its serviceability.

Unit. Each (EA). One reflex testing hammer as specified, constitutes one unit.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after the delivery of the supplies to which such records relate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Examination. Examination shall be conducted to determine compliance with specification requirements.

Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and as specified herein. Unit of product for examination purposes shall be one reflex testing hammer as specified. Sampling shall be inspection level II with an Acceptable Quality Level (AQL) of 1.0.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and as specified. Unit of product for test purposes shall be one reflex testing hammer. Sampling shall be inspection level S-2 with an AQL of 1.0.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commerical Item Description, and that the product conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Ordering data. Intermediate/exterior package quantities, labeling, and marking must be as specified in the contract and/or order.

NOTE: The following National Stock Number and its respective Item Identification is covered by this document:

National Stock Number	Item Identification
6515-00-340-6700	HAMMER, REFLEX TESTING, Taylor, 8 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:

Army-MD
Navy-MS
Air Force-03

Preparing Activity:

DoD-MB

Agent:


DLA-DM


CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
USPHS
FDA-MPQAS

Project No. 6515-5572
Location: mark\hammer

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

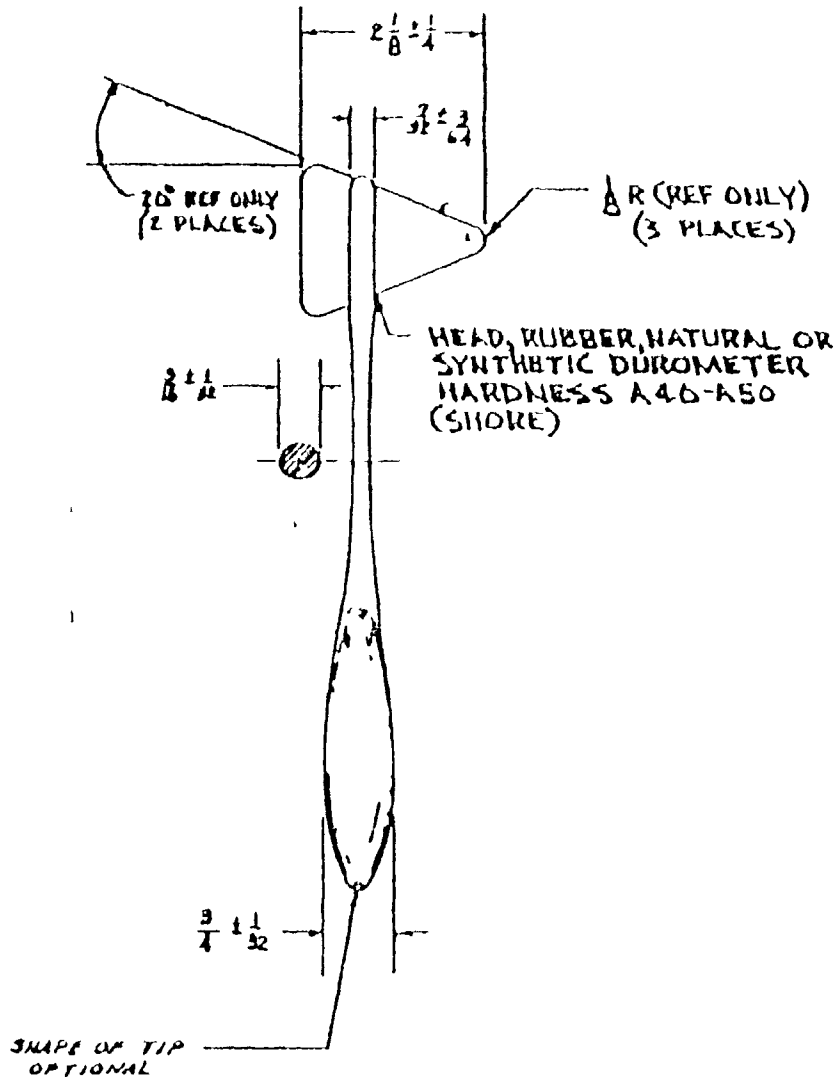

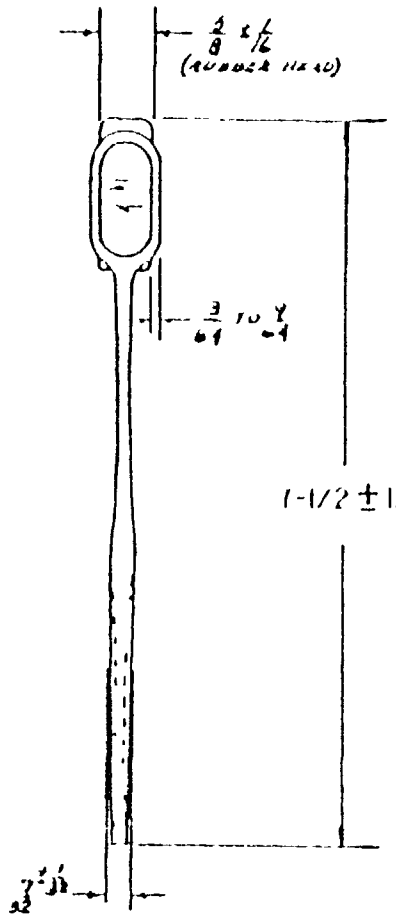

GENERAL NOTES:

1. TOLERANCES INDICATED DELINEATE ACCEPTABLE EXTREME DIMENSIONS, AND ARE NOT INTENDED TO PERMIT VARIATIONS WITHIN A SINGLE INSTRUMENT WHICH WILL SACRIFICE UNIFORMITY, SYMMETRY AND FIRST QUALITY WORKMANSHIP.
2. REMOVE BURRS AND BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
3. DIMENSIONS ARE IN INCHES.

NSN 6515-00-340-6700

FIGURE 1 HAMMER, REFLEX TESTING, TAYLOR, 9 INCH

A-A-54845

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-54845	2. DOCUMENT DATE (YYMMDD) 18 June 1993

3. DOCUMENT TITLE
HAMMER, REFLEX TESTING, Taylor

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME	b. ORGANIZATION
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (*If applicable*)
	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (*Include Area Code*) (1) Commercial / (2) AUTOVON
Defense Personnel Support Center ATTN: DPSC-MSE	(215) 737 2870 / 444-2870
c. ADDRESS (*Include Zip Code*) 2800 South 20th Street Philadelphia, PA 19145	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete* 198

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.