
FSC 5330

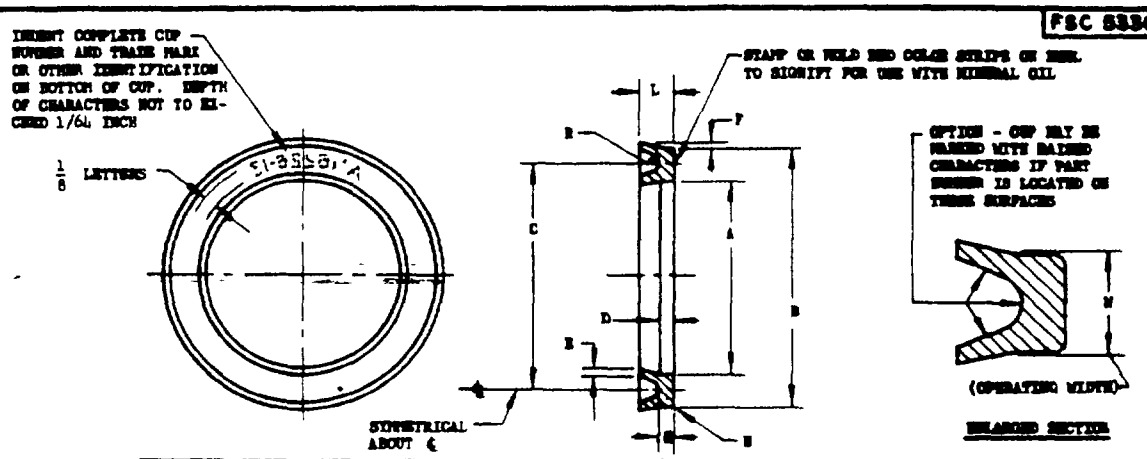

DASH NO	W & L	NOMINAL ID	NOMINAL OD	DIAMETERS ±.005 A	B	C	D	E	F	R RAD	S RAD
1	3/16	1/8	1/2	.140	.485	5/16	1/16	.038	.030	.050	1/32
2	3/16	3/16	9/16	.203	.548	3/8	1/16	.038	.030	.050	1/32
3	3/16	1/4	5/8	.265	.610	7/16	1/16	.038	.030	.050	1/32
4	3/16	5/16	11/16	.328	.673	1/2	1/16	.038	.030	.050	1/32
5	3/16	3/8	3/4	.390	.735	9/16	1/16	.038	.030	.050	1/32
6	3/16	7/16	13/16	.453	.798	5/8	1/16	.038	.030	.050	1/32
7	3/16	1/2	7/8	.515	.860	11/16	1/16	.038	.030	.050	1/32
8	1/4	1/4	3/4	.265	735	1/2	3/32	.045	.030	.070	1/32
9	1/4	5/16	13/16	328	798	9/16	3/32	.045	030	.070	1/32
10	1/4	3/8	7/8	390	.860	5/8	3/32	.045	.030	.070	1/32
11	1/4	7/16	15/16	.453	.923	11/16	3/32	.045	.030	.070	1/32
12	1/4	1/2	1	.515	.985	3/4	3/32	.045	.030	.070	1/32
13	1/4	9/16	1- 1/16	.578	1.048	13/16	3/32	.045	.030	.070	1/32
14	1/4	5/8	1- 1/8	.640	1.110	7/8	3/32	.045	.030	.070	1/32
15	1/4	11/16	1- 3/16	.703	1.173	15/16	3/32	.045	.030	.070	1/32
16	1/4	3/4	1- 1/4	.765	1.235	1	3/32	.045	.030	.070	1/32
17	1/4	13/16	1- 5/16	.828	1.298	1- 1/16	3/32	.045	.030	.070	1/32
18	1/4	7/8	1- 3/8	.890	1.360	1- 1/8	3/32	.045	030	.070	1/32
19	1/4	15/16	1- 7/16	953	1.423	1- 3/16	3/32	.045	.030	.070	1/32
20	1/4	1	1- 1/2	1.015	1.485	1- 1/4	3/32	.045	.030	.070	1/32
21	1/4	1-1/16	1- 9/16	1 078	1.548	1- 5/16	3/32	.045	.030	.070	1/32
22	1/4	1-1/8	1- 5/8	1.140	1.610	1- 3/8	3/32	.045	.030	070	1/32
23	1/4	1-3/16	1-11/16	1.203	1.673	1- 7/16	3/32	.045	.030	.070	1/32
24	1/4	1-1/4	1- 3/4	1.265	1 735	1- 1/2	3/32	.045	.030	.070	1/32
25	5/16	1-1/4	1- 7/8	1.265	1 860	1- 9/16	1/8	.050	.032	.093	1/32
26	5/16	1-3/8	2	1 390	1.985	1-11/16	1/8	.050	.032	.093	1/32
27	5/16	1-1/2	2- 1/8	1 515	2 110	1-13/16	1/8	.050	.032	.093	1/32
28	5/16	1-5/8	2- 1/4	1.640	2.235	1-15/16	1/8	.050	.032	.093	1/32
29	5/16	1-3/4	2- 3/8	1 765	2.360	2- 1/16	1/8	.050	.032	.093	1/32
30	5/16	1-7/8	2- 1/2	1.890	2.485	2- 3/16	1/8	.050	.032	.093	1/32
31	5/16	2	2- 5/8	2.015	2 610	2- 5/16	1/8	.050	.032	.093	1/32
32	5/16	2-1/8	2- 3/4	2.140	2 735	2- 7/16	1/8	050	.032	.093	1/32
33	5/16	2-1/4	2- 7/8	2.265	2.860	2- 9/16	1/8	.050	.032	.093	1/32
34	5/16	2-3/8	3	2.390	2 985	2-11/16	1/8	.050	.032	.093	1/32
35	5/16	2-1/2	3- 1/8	2.515	3.110	2-13/16	1/8	.050	.032	.093	1/32
36	3/8	2-1/2	3- 1/4	2 515	3.235	2- 7/8	1/8	.054	.035	.125	3/64
37	3/8	2-5/8	3- 3/8	2 640	3 360	3	1/8	.054	.035	.125	3/64
38	3/8	2-3/4	3- 1/2	2.765	3.485	3- 1/8	1/8	.054	.035	.125	3/64
39	3/8	2-7/8	3- 5/8	2.890	3.610	3- 1/4	1/8	.054	.035	.125	3/64
40	3/8	3	3- 3/4	3.015	3 735	3- 3/8	1/8	054	.035	.125	3/64
41	1/8	1/8	3/8	.135	.365	1/4	3/64	.030	020	.020	1/64
42	1/8	3/16	7/16	.197	.427	5/16	3/64	.030	.020	.020	1/64
43	1/8	1/4	1/2	.260	.490	3/8	3/64	.030	.020	.020	1/64
44	1/8	5/16	9/16	.322	552	7/16	3/64	.030	.020	020	1/64
45	1/8	3/8	5/8	.385	.615	1/2	3/64	.030	.020	.020	1/64
46	1/8	7/16	11/16	.447	.677	9/16	3/64	.030	.020	.020	1/64
47	1/8	1/2	3/4	.510	.740	5/8	3/64	.030	.020	.020	1/64
48	3/16	5/8	1	.640	.984	13/16	1/16	038	.030	050	1/32
49	3/16	3/4	1-1/8	.765	1.109	15/16	1/16	.038	.030	.050	1/32
50	3/16	7/8	1-1/4	.890	1.234	1- 1/16	1/16	.038	.030	.050	1/32
51	3/16	1	1-3/8	1.015	1.359	1- 3/16	1/16	.038	.030	.050	1/32
52	3/16	1-1/8	1-1/2	1 140	1.484	1- 5/16	1/16	038	.030	.050	1/32
53	3/16	1-1/4	1-5/8	1.265	1.609	1- 7/16	1/16	.038	.030	.050	1/32

INACTIVE FOR DESIGN AND PROCUREMENT (23 APR 45)
EXCEPT AS SPECIFICALLY ACCEPTED BY AIR FORCE OR NAVY

MATERIAL SPECIFICATION MIL-P-5516, CLASS B.
SURFACE SMOOTHNESS, FINISH, AND MANUFACTURING PROCESSES SHALL CONFORM TO MIL P-5516
EXAMPLE OF PART NO AN6226-13 = "U" CUP PACKING, NOMINAL ID 9/16, NOMINAL OD 1-1/16.
USE OF THESE PACKINGS LIMITED TO PRESSURES OF 600 LB PER SQ INCH OR LESS
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS ±.005, FRACTIONS ±1/64, ANGLES ±1°

PROCUREMENT SPECIFICATION

AIR FORCE-NAVY AERONAUTICAL STANDARD

PACKING—"U" CUP HYDRAULIC

AN6226

©REINSTATED - TO SUPPORT A F PROCUREMENT

PREPAIRING ACTIVITY AF-99

APPROVED 19 Jan 42 REVISED (1) 17 Jun 42 (2) 10 Feb 44 (3) 23 Apr 45 (4) 27 Feb 53 (5) 1 NOV 78 (6) 31 JAN 79

NOTE: This drawing was approved by joint action of the [illegible] and Navy Departments as the [illegible] Navy standard and for this product. This drawing supersedes all associated standard drawings for the same product and shall be the source of data for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown. [illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.