NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

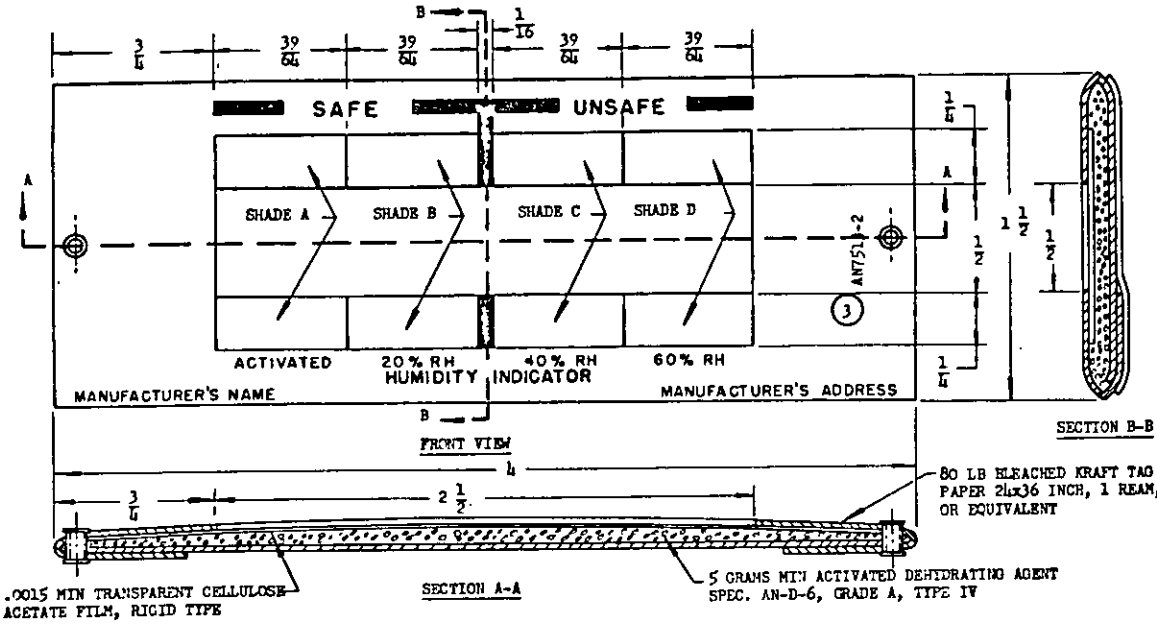

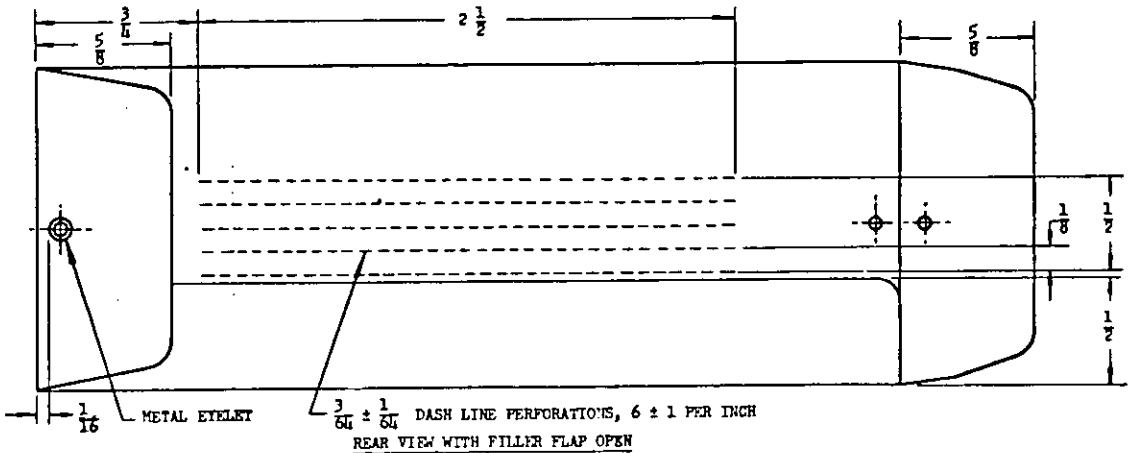

REAR VIEW WITH FILLER FLAP OPEN

AN PART NO.
(a) AN7513-2

(a) PREVIOUS PART NUMBER AN7513-1A INACTIVE FOR NEW DESIGN AND PROCUREMENT. PART NUMBER AN7513-2 REPLACES PART NUMBER AN7513-1A.

ALL TYPE IN BLACK, EXCEPT "SAFE" IN SHADE A AND "UNSAFE" IN RED.

SHADES A, B, C, AND D TO BE IN ACCORDANCE WITH THE COLORS SHOWN ON CHART AND10376 WHEN THE CHART IS VIEWED THROUGH CELLULOSE ACETATE FILM OF THE SAME TYPE AND THICKNESS AS THAT USED IN THE INDICATOR.

PERFORATIONS SHALL NOT PERMIT APPRECIABLE SIFTING OF ENCLOSED DEHYDRATING AGENT. THEY MAY BE PARALLEL TO THE SHORT DIMENSION OF THE ENVELOPE.

ENVELOPE SHALL BE CONSTRUCTED SO THAT AN ADEQUATE BOND OR SEAL IS PROVIDED BETWEEN THE PAPER SURFACES TO CONFINE THE ENCLOSED DEHYDRATING AGENT.

GLUE SHALL BE WATER INSOLUBLE AND OF SUCH TYPE AS TO MAINTAIN BOND WHEN THOROUGHLY DEHYDRATED.

LONG SEAM ON BACK SHALL NOT INTERFERE WITH PERFORATIONS.

EACH INDICATOR TO BE SUPPLIED WITH TWO 10 INCH LENGTHS OF .016 DIA TAG WIRE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/16.

(4) CANCELLED 8 MARCH 85 SUPERSEDED BY MS16770

APPROVED 21 Oct 42 REVISED (1) 12 Mar 46 (2) 5 Feb 47 (3) 10 Aug 52 (4) 8 MARCH 85

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN7513
NONE	INDICATOR — HUMIDITY, SMALL	

SUPERSEDES ANA DWG AN7512

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.