NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

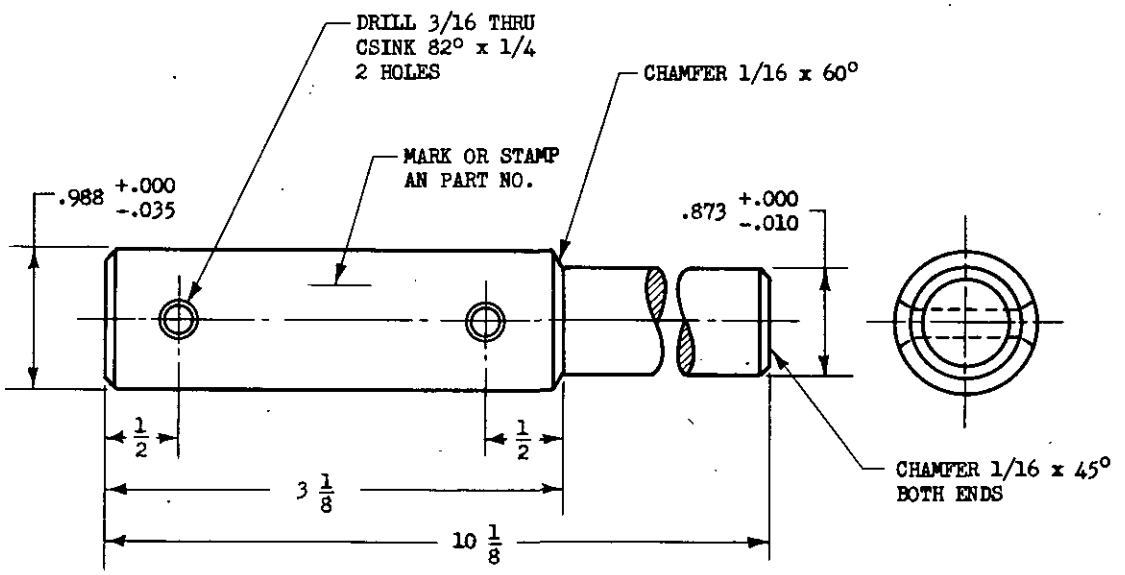

AN PART NO.
AN8511-1

MATERIAL: STEEL ROD, SPEC AN-S-14 OR AN-QQ-S-684.

HEAT TREAT: 195,000 TO 220,000 LBS/SQ IN. TENSILE STRENGTH IN ACCORDANCE WITH SPEC AN-QQ-H-201.

FINISH: SANDBLAST AND ZINC OR CADMIUM PLATE IN ACCORDANCE WITH SPECS AN-P-32 OR AN-P-61 RESPECTIVELY, OR AS OTHERWISE SPECIFIED.

BREAK SHARP EDGES .010 MAX. REMOVE BURRS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, ANGLES ±1°.

FOR USE WITH AN8507-1 BAR.

(A) CANCELED AFTER 15 SEPTEMBER 1978 NO SUPERSEDING STANDARD.

NOTE: This drawing was approved by joint action of the War and Navy Departments as the Army-Navy standard for this product. This drawing supersedes all previously standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than six months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

APPROVED 21 Oct 44 REVISED (A) 15 SEPTEMBER 1978

PROCUREMENT SPECIFICATION	ARMY-NAVY AERONAUTICAL STANDARD	AN8511
NONE	ADAPTER - TELESCOPING BAR (7/8 TO 1 INCH OD)	

SUPERSEDES AAF DRAWING 44A19549

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE: 1978—703-122:4309