MILITARY SPECIFICATION SHEET

FUSE BOXES, FEEDER DISTRIBUTION, SUBMERSIBLE (15 FEET), 125 VOLTS, ALTERNATING CURRENT, THREE PHASE BUSES, SINGLE PHASE BRANCHES, 0-30 AMPERE MIDGET FUSES, SYMBOLS 646.1 AND 647.1

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuse boxes described herein shall consist of this document and the latest issue of MIL-F-24646(SH).

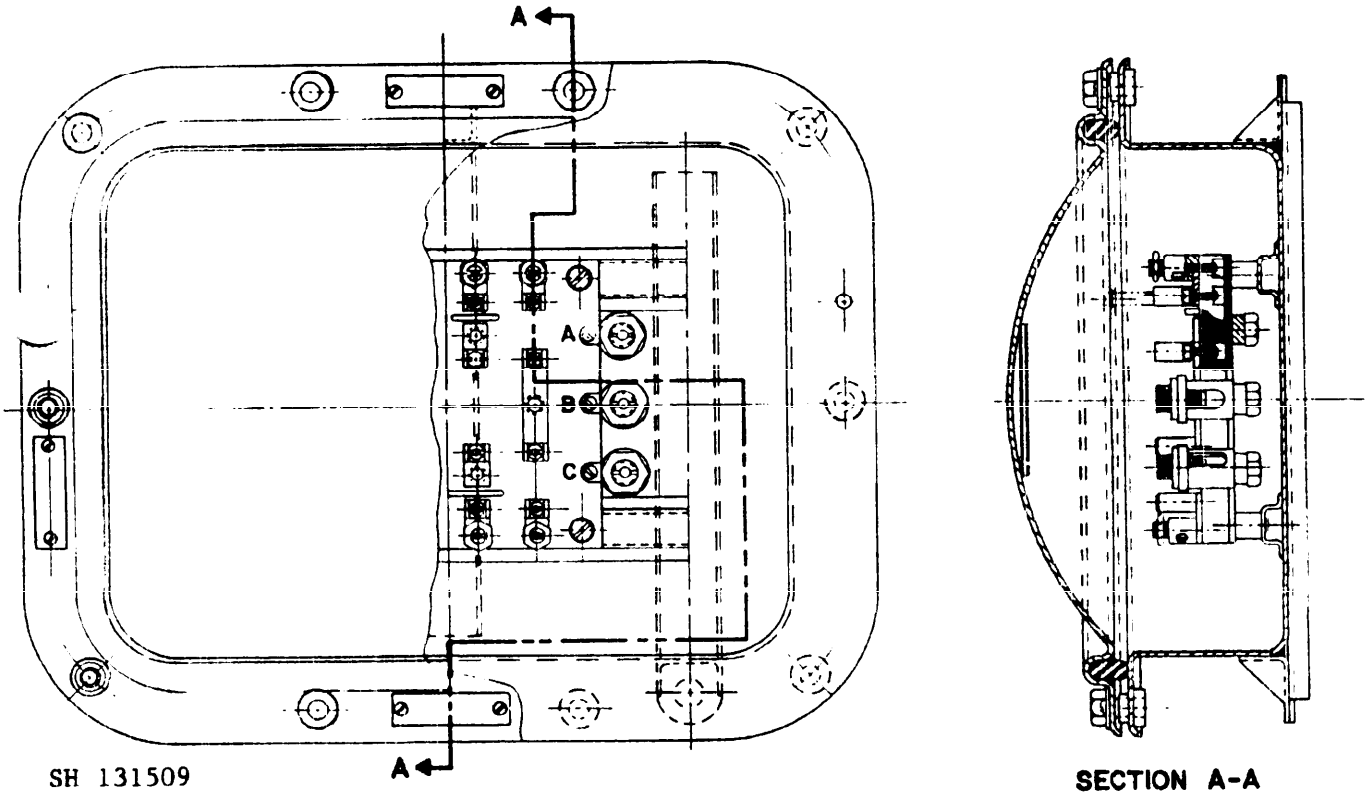


FIGURE 1. Fuse box assembly, typical. (01) (02)
(Symbol 646.1 shown)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:31Z
Check the source to verify that this is the current version before use.

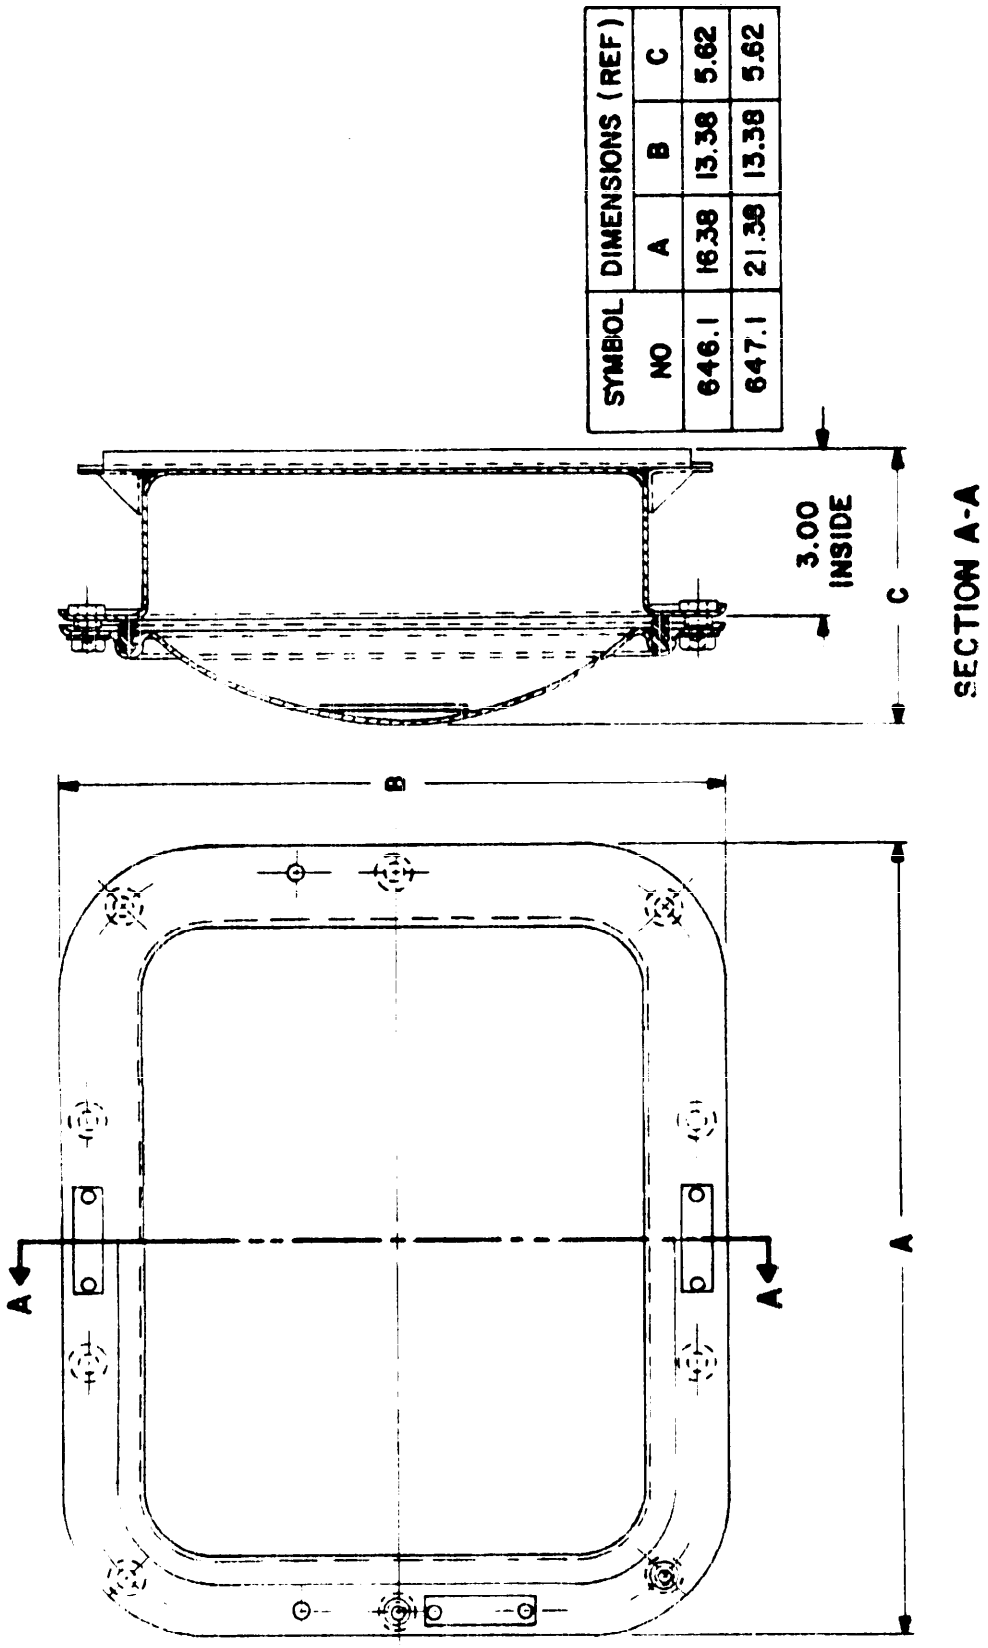


FIGURE 2. Enclosure, overall dimensions. (03) (04)
(Symbols 646.1 and 647.1)

SH 131510

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:31Z
Check the source to verify that this is the currentversion before use.

SYMBOL NO	DIMENSIONS A	B
646.1	9.25	4.62
647.1	14.25	7.12

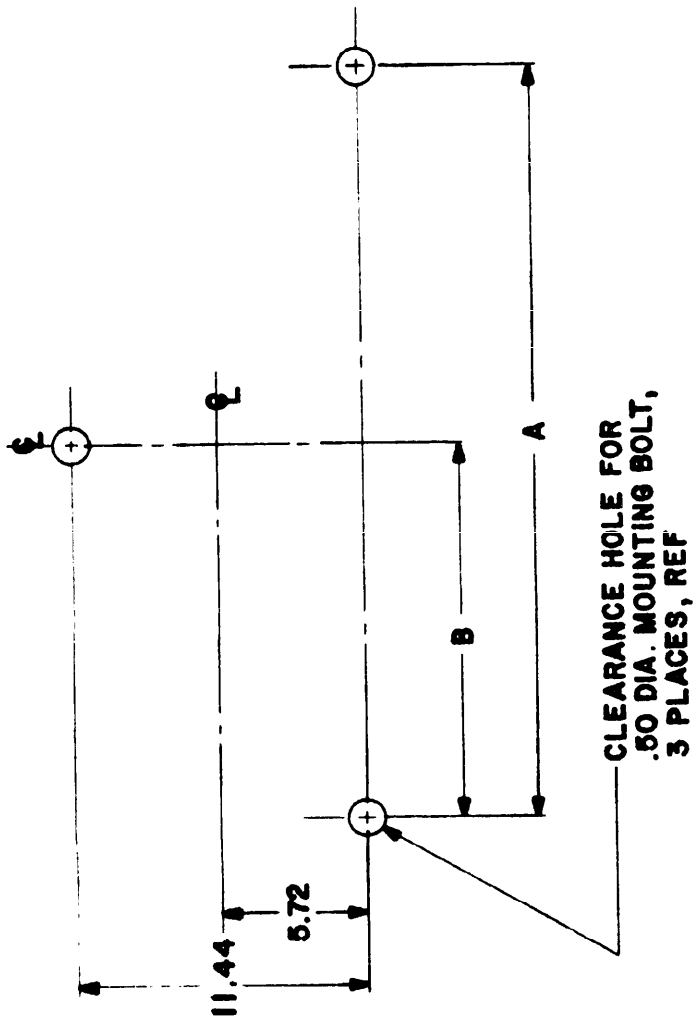


FIGURE 3. Mounting dimensions, ref.
(Symbols 646.1 and 647.1)

SH 131511

Source: https://assist.dla.mil -- Downloaded: 20261O-20T00:31Z
Check the source to verify that this is the currentversion before use.

SYMBOL NO.	DIMENSIONS (MAX)		
	A	B	C
646.1	7.50	5.75	2.30
647.1	12.38	5.75	2.30


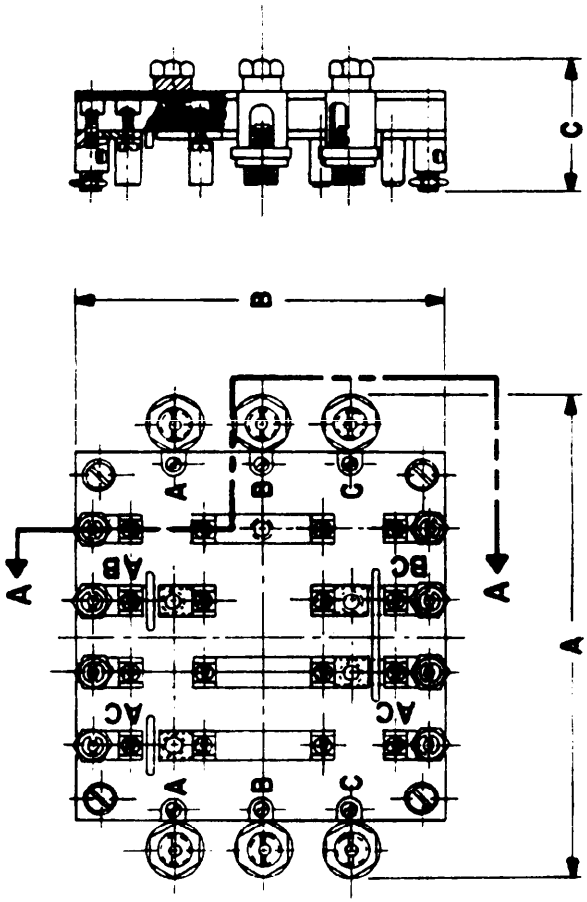



FIGURE 4. Fuse block assembly, typical. (05) (06)
(Symbols 646.1 and 647.1)

SH 131512

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:31Z
Check the source to verify that this is the currentversion before use.

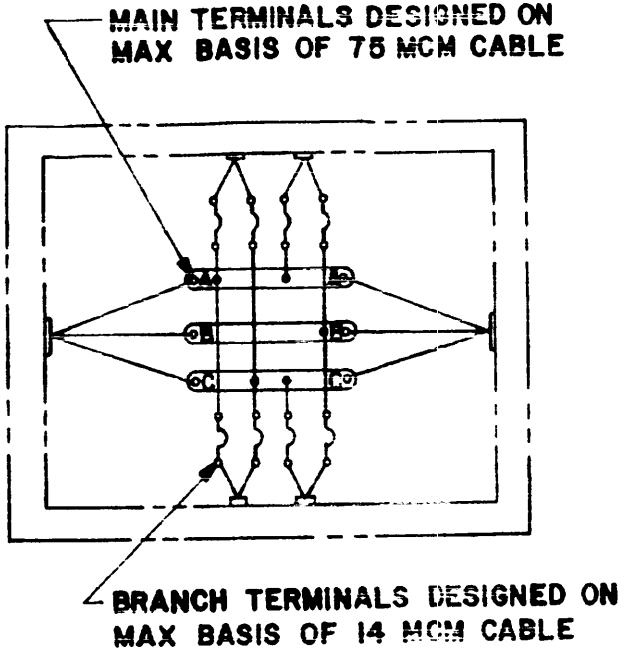

A. Four single-phase branches
(Symbol 646.1)

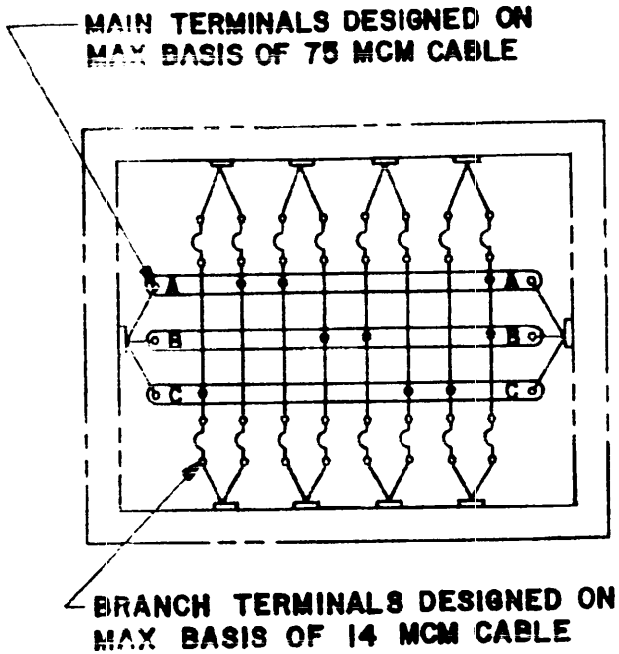

B. Eight single-phase branches
(Symbol 647.1)

SH 131513

FIGURE 5. Wiring diagrams. (07) (08)

Source: https://assist.dla.mil -- Downloaded: 2026/10-20T00:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Symbol numbers: See table I.

Design:
Electrical rating: 125 volts alternating current, 0-30 ampere, 60 hertz.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Wiring diagrams: See figure 5.
Mounting dimensions: See figure 3.
Degree of enclosure: Submersible (15 feet).
Designation and marking: See MIL-F-24646(SH).
Parts: The parts listed in table II and specified in MIL-F-24646(SH) shall be used in the construction of the fuse boxes specified herein.

General information:
Military part numbers and general information are as specified in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Weight in pounds	No. of circuits	Feeder MCM	Branch MCM	Fuse size	Bus bar size	Supersedes	
								Drawing no.	Type
M24646/8-001	646.1	27.8	4	75	14	midget 0-30A	0.62 x 0.25	9000-S-74199	0-8A
M24646/8-002	647.1	33.3	8	75	14	midget 0-30A	.62 x .25	9000-S-74202	0-24A

TABLE II. Parts list.

Item no.1/	Description	QTY M /-		Material/spec	Remarks
		001	002		
01	Fuse box assembly (sym 646.1)	-		MIL-F-24646/8	See figure 1
02	Fuse box assembly (sym 647.1)		-	MIL-F-24646/8	See figure 1
2/03	Enclosure (10 x 13 x 5)	1		M24142/6-004	See figure 2 Type A Mod
2/04	Enclosure (10 x 18 x 3)		1	M24142/6-006	See figure 2 Type A Mod
05	Fuse block assembly	1		MIL-F-24646/8	See figure 4
06	Fuse block assembly		1	MIL-F-24646/8	See figure 4
07	Wiring diagram	1		MIL-E-2036	See figure 5
08	Wiring diagram		1	MIL-E-2036	See figure 5
09	Fuse clip (midget 0-30A)	16	32	M21346/1-04	----
10	Identification plate	1	1	Brass, QQ-B-613	----
11	Information plate	4	8	Brass, QQ-B-613	----

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:31Z
Check the source to verify that this is the current version before use.

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Enclosure is same as MIL-E-24142/6(SH), except for inside depth which is 3 inches instead of 5 inches as shown.

Preparing activity:
Navy - SH
(Project 5920-N163-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:31Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:31Z
Check the source to verify that this is the current version before use.