MIL-W-52571B(ME)
21 March 1974
SUPERSEDING
MIL-W-52571A(ME)
12 May 1969

MILITARY SPECIFICATION

WATER PURIFICATION UNIT, AND

WATER PURIFICATION EQUIPMENT SET, 420-GPH,

PACKAGING OF

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the requirements for materials, methods, and procedures for the preservation, packaging, packing, and marking of the 420 gph water purification unit and the 420 gph water purification equipment set.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Strapping, Steel, Flat and Seals.
TT-P-664	- Primer Coating, Synthetic, Rust-Inhibiting, Lacquer-Resisting.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-C-843	- Cushioning Material, Cellulosic.

FSC ~~8010~~ PACK

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:25Z
Check the source to verify that this is the current version before use.

PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-S-760	- Strapping, Nonmetallic (And Connectors).
PPP-T-60	- Tape: Packaging, Waterproof.

Military

MIL-C-104	- Crates, Wood; Lumber and Plywood Sheathed, Nailed and Bolted.
MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-C-506	- Carbon, Activated, Powdered.
MIL-P-10603	- Pumps and Pumping Units, Centrifugal, Power-Driven, for Water, Packaging of.
MIL-E-16298	- Electric Machines Having Rotating Parts and Associated Repair Parts: Packaging of.
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservative and Break-In.
MIL-F-52637	- Filter Aids, Water Purification.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:25Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Unit of product. For the purpose of inspection, a completed pack of any one level prepared for shipment shall be considered a unit of product.

4.4.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.3 Examination. Samples selected in accordance with 4.4.2 shall be examined for the defects marked "X" for the applicable level in Table I. Acceptable quality level (AQL) shall be 2.5 percent defective.


4.5 Inspection procedure.

4.5.1 Examination. Packs shall be examined as specified herein, for the defects listed in Table I.

Table I. Classification of Defects

	Defect	Level A	Level C
101.	Materials, methods, or containers not as specified for preservation, packaging, intermediate packaging or packing. Each incorrect material, method, or container shall constitute one defect.	X	-
102.	Preservatives applied to surfaces which will come in contact with chemical solutions and water, except waste water, except as specified for pump interiors.	X	-
103.	Belts not removed or released from tension.	X	-
104.	Solution feeder assembly not preserved as specified.	X	-
105.	Electric motors not preserved in accordance with the referenced document.	X	-
106.	Float switch rod and float not secured.	X	-
107.	Gate valves and drain cocks not left open.	X	-
108.	Filter elements not preserved as specified.	X	-
109.	Sleeves not packaged and intermediate packaged as specified.	X	-
110.	Pumps not preserved in accordance with the referenced document.	X	-
111.	Intermediate and consolidated packaging not as specified.	X	-
112.	Calcium hypochlorite not packaged in quantities of 6 as specified.	X	-
113.	Pump cover not preserved as specified.	X	-
114.	Ends of hoses and hose assemblies not covered as specified.	X	-
115.	Components not wrapped in barrier material and secured with tape as specified.	X	-

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:25Z
Check the source to verify that this is the current version before use.

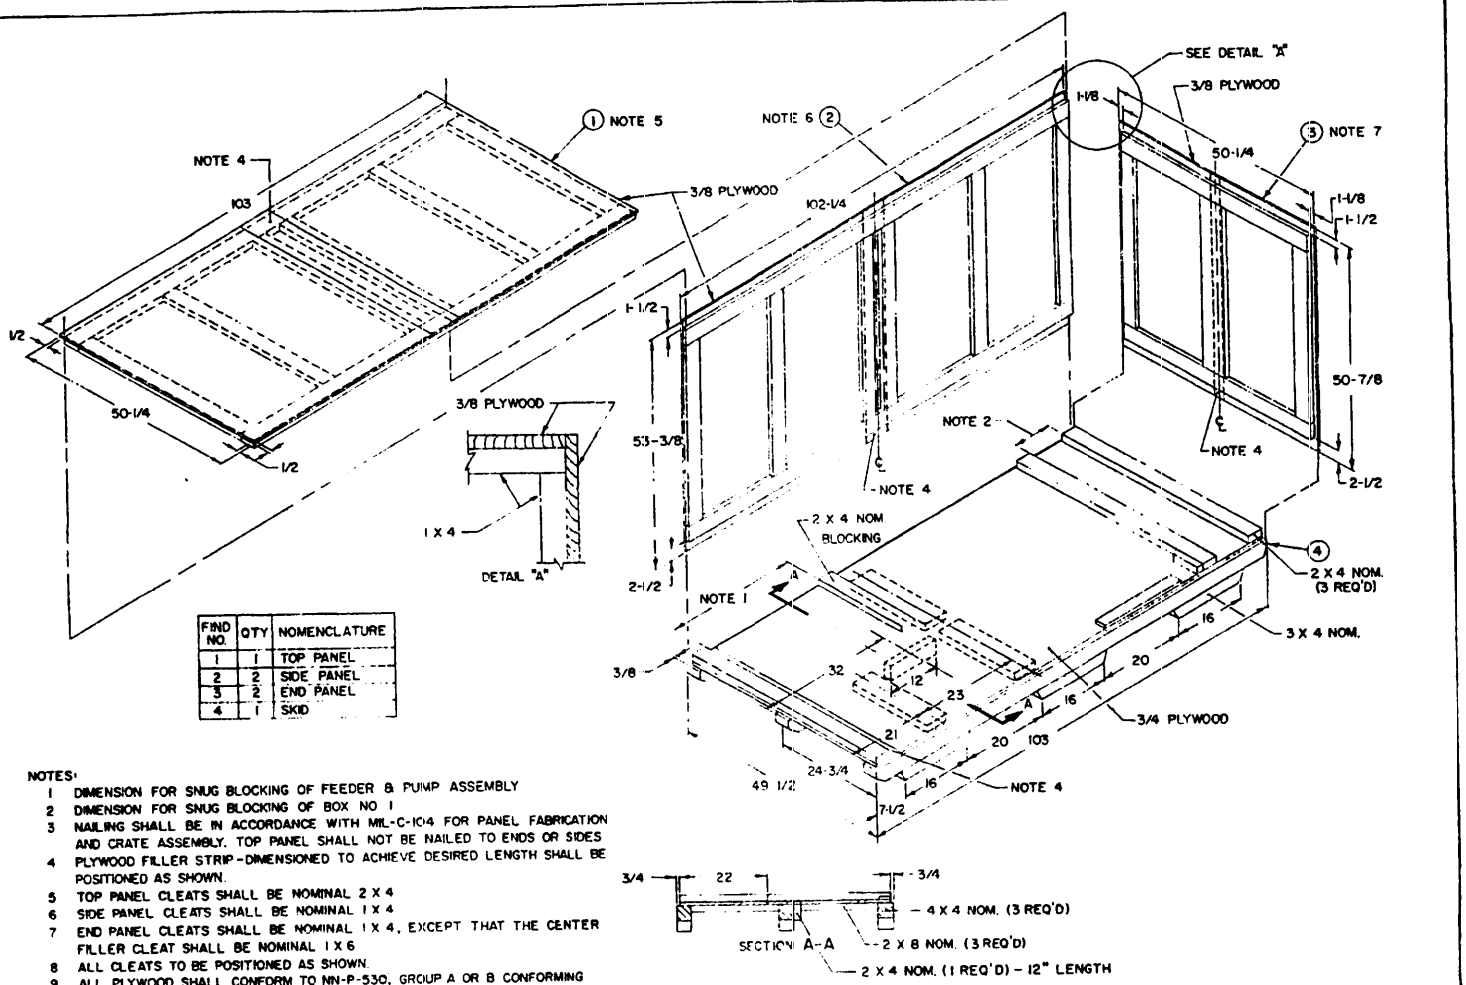

FIND NO.	QTY	NOMENCLATURE
1	1	TOP PANEL
2	2	SIDE PANEL
3	2	END PANEL
4	1	SKID

NOTES:

1. DIMENSION FOR SNUG BLOCKING OF FEEDER & PUMP ASSEMBLY
2. DIMENSION FOR SNUG BLOCKING OF BOX NO 1
3. NAILING SHALL BE IN ACCORDANCE WITH MIL-C-1014 FOR PANEL FABRICATION AND CRATE ASSEMBLY. TOP PANEL SHALL NOT BE NAILED TO ENDS OR SIDES
4. PLYWOOD FILLER STRIP-DIMENSIONED TO ACHIEVE DESIRED LENGTH SHALL BE POSITIONED AS SHOWN.
5. TOP PANEL CLEATS SHALL BE NOMINAL 2 X 4
6. SIDE PANEL CLEATS SHALL BE NOMINAL 1 X 4
7. END PANEL CLEATS SHALL BE NOMINAL 1 X 4, EXCEPT THAT THE CENTER FILLER CLEAT SHALL BE NOMINAL 1 X 6
8. ALL CLEATS TO BE POSITIONED AS SHOWN.
9. ALL PLYWOOD SHALL CONFORM TO NN-P-530, GROUP A OR B CONFORMING TO PS-51 TYPE II, GRADE 3-4 OR PSI STANDARD SHEATHING WITH EXTERIOR GLUE
10. TOLERANCE: OVER ALL OUTSIDE DIMENSIONS OF THE CRATE SHALL BE +1/4 -0.

Figure 1. CRATE CONSTRUCTION.

DX1766A

Source: https://assist.dla.mil -- Downloaded: 20260-22T21:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 20260-22T21:25Z
Check the source to verify that this is the current version before use.


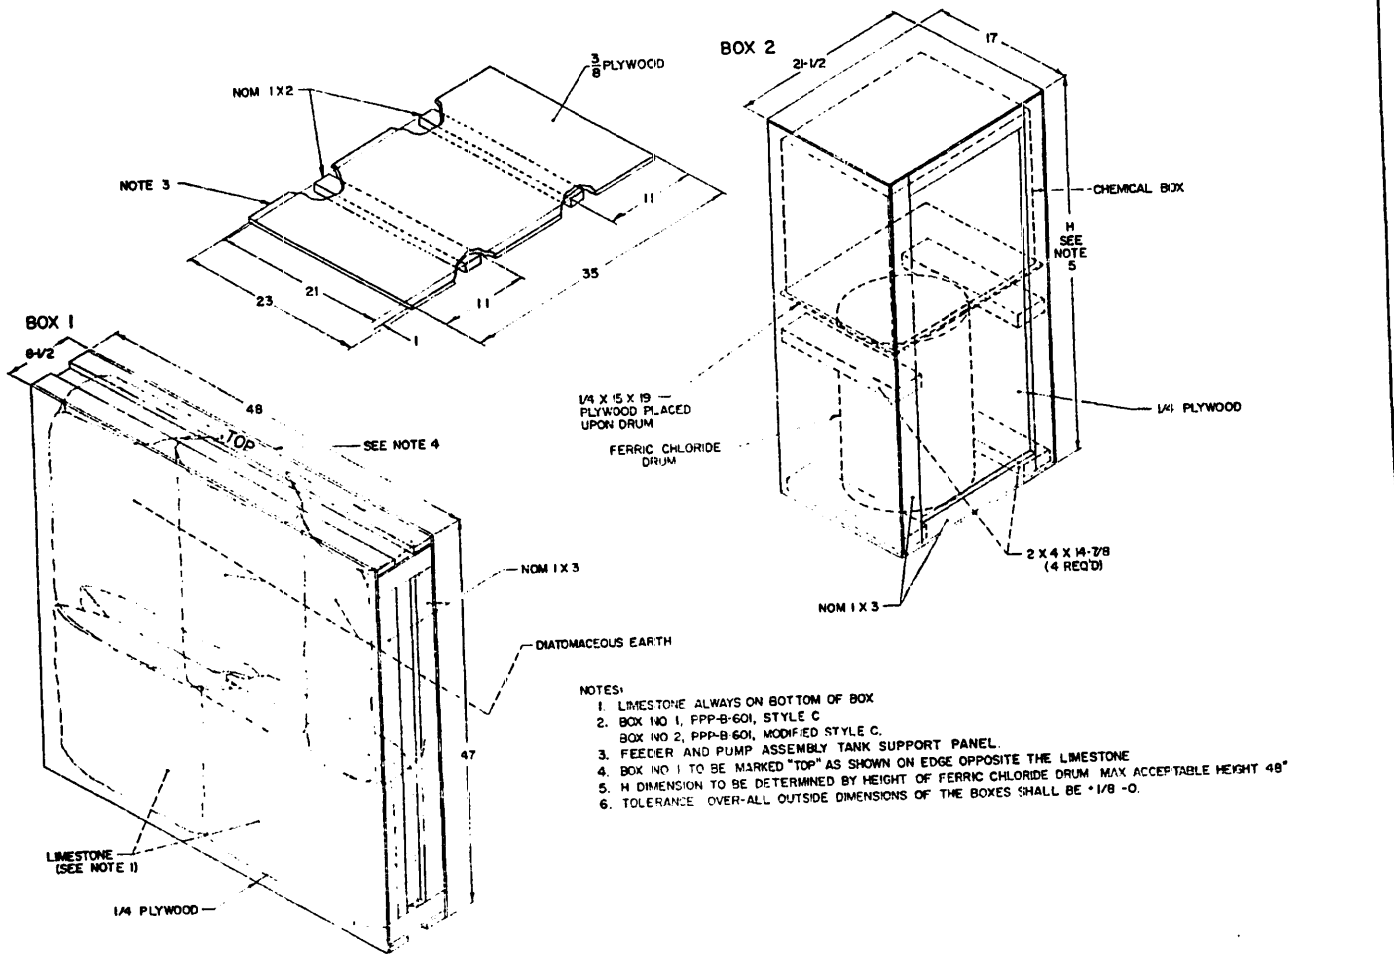


Figure 2. INTERMEDIATE CONTAINERS.

DX1767A

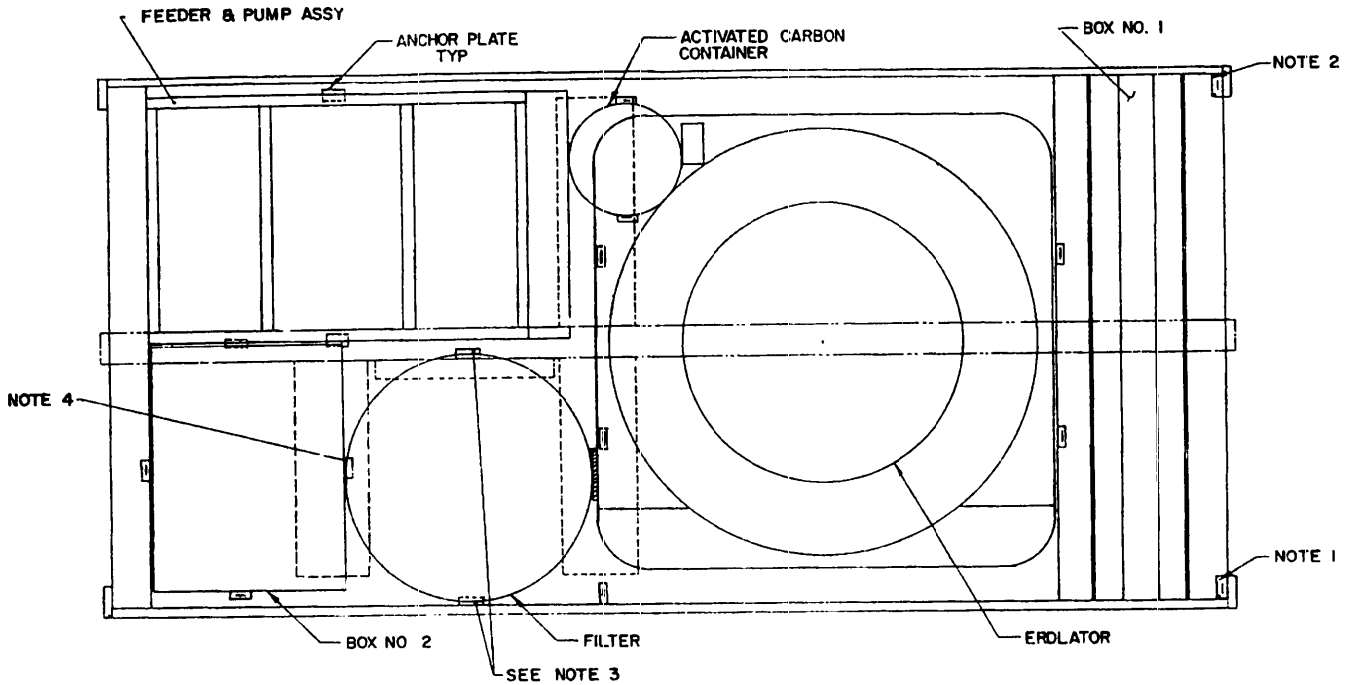



NOTES:
1 CARRIAGE BOLTS (2)—3/8-16 X 3 WITH WASHER AND NUT.
2 CARRIAGE BOLTS (2)—3/8-16 X 6-1/2 WITH WASHER AND NUT.
3 ANCHOR PLATES TO BE SECURED UNDER BASE OF FILTER. FILTER POSITIONED AS CLOSE TO EDGE AS POSSIBLE.
4 ANCHOR PLATE FOR BOX NO. 2 LOCATED UNDER FILTER BASE.

Figure 3. LOADING PLAN.

DX1768A

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T21:25Z
Check the source to verify that this is the current version before use.

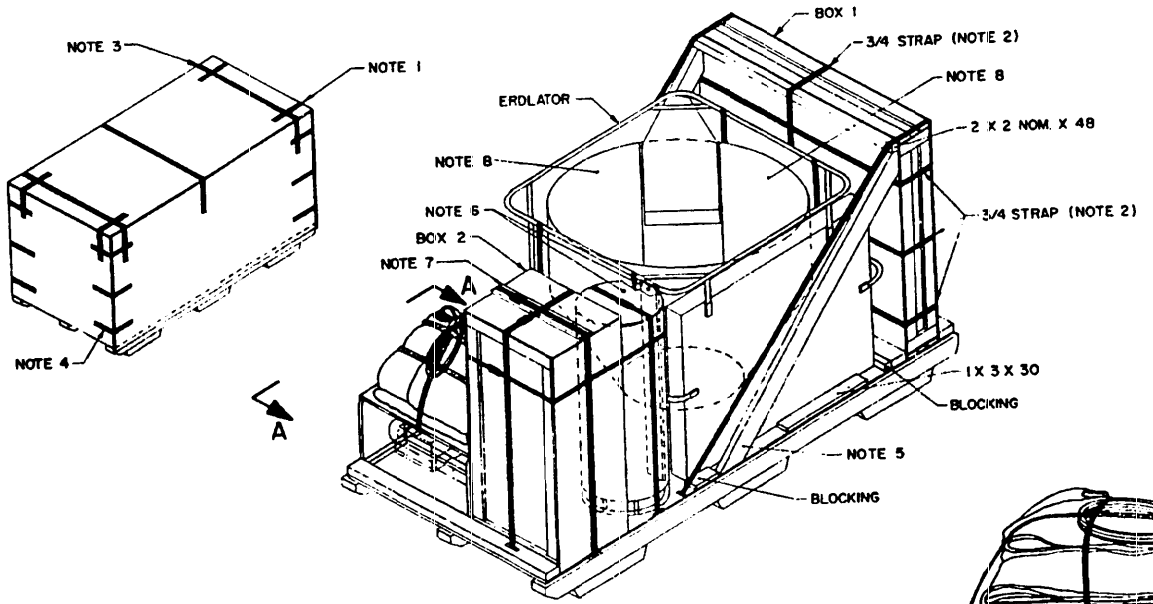

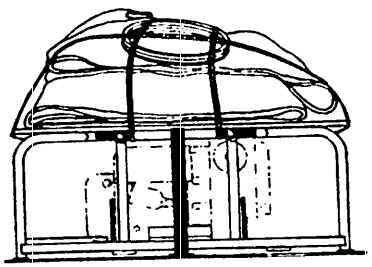

VIEW A-A

NOTES:

1. FOR STRAP DETAILS SEE MIL-C-104
2. ALL STRAPS 1-1/4 INCH EXCEPT AS NOTED.
3. TOP STRAPPING: STRAPS TO BE CENTERED OVER CRATE FRAMING MEMBERS. CENTER STRAP MAY BE PLACED ON EITHER SIDE OF CENTER TO MEET THIS REQUIREMENT.
4. CORNER STRAPPING: UPPER AND LOWER CORNER STRAPS TO BE POSITIONED FOR NAILING TO FRAMING MEMBERS AND BASE HEADER. CENTER STRAP TO BE POSITIONED AS SHOWN.
5. NAIL BRACE TO SKID BASE WITH 16d, CEMENT COATED NAILS. BRACE TO BE 2 BY 4 NOM. LUMBER CUT TO FIT.
6. FILTER UNIT WITH 1/2 INCH CIRCULAR PLYWOOD PROTECTOR NAILED TO 1 X 6.
7. NOMINAL 1 X 2 X 21 1/2" STRAP SUPPORT.
8. PLYWOOD, 1/4" THICK, CUT TO FIT BETWEEN ANGLE IRON BRACE AND SIDE OF ERDLATOR. TO BE USED FOR STORAGE OF MISCL. OVER-PACK ITEMS (WHEN REQUIRED).

Figure 4. SECURING OF COMPONENTS ON SKID BASE.

DX1769A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-W-52571B(ME) Water Purification Unit, and Water Purification Equipment Set, 420-GPH, Packaging of

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1426
11 Oct 72 (Rev)

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:25Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. ARMY MOBILITY EQUIPMENT
RESEARCH, DEVELOPMENT
CENTER
FORT BELVOIR, VIRGINIA 22060

OFFICIAL BUSINESS

AMSME-RZD-S

POSTAGE AND FEES PAID
DOD-314

COMMANDER
U. S. ARMY MOBILITY EQUIPMENT
RESEARCH. DEVELOPMENT CENTER
ATTN: AMSME-RZD-S
FORT BELVOIR, VIRGINIA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:25Z
Check the source to verify that this is the current version before use.