MIL-B-43692A
10 July 1978
SUPERSEDING
MIL-B-43692
3 March 1970

MILITARY SPECIFICATION

# BOXES, FIBERBOARD, ONE-PIECE FOLDER, SPECIAL PURPOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the requirements of one piece fiberboard boxes of one type, class, variety and grade.

1.2 Classification. The boxes shall be of the following sizes as indicated by inside dimensions as specified (see 6.2).

| Size | Width inches (mm) | Length inches (mm) |
|---|---|---|
| A | 2-1/2 (63) | 42 (1067) |
| B | 3 (76) | 25 (635) |
| C | 3 (76) | 33 (838) |
| D | 3 (76) | 42 (1067) |
| E | 3-1/2 (89) | 39 (991) |
| F | 3-1/2 (89) | 43 (1092) |
| G | 4-1/2 (114) | 24 (610) |

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Natick Research and Development Command, ATTN: DRDNA-ES, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8115

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:02Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

| | | |
|---|---|---|
| PPP-B-636 | - | Boxes, Shipping, Fiberboard. |
| PPP-B-638 | - | Boxes, Liners and Sleeves, Fiberboard, Knocked Down Flat; Packing of. |
| PPP-F-320 | - | Fiberboard, Corrugated and Solid Sheet Stock (Container Grade) and Cut Shapes. |
| PPP-T-60 | - | Tape: Packaging, Waterproof. |
| PPP-T-76 | - | Tape, Packaging; Paper (For Carton Sealing). |

STANDARD

MILITARY

| | | |
|---|---|---|
| MIL-STD-105 | - | Sampling Procedures and Tables for Inspection by Attributes. |

DRAWING

US ARMY NATICK RESEARCH AND DEVELOPMENT COMMAND

| | | |
|---|---|---|
| 10-1-506 | - | Box Fiberboard, One Piece Folder, Special Purpose. |

(Minature copy of Drawing 10-1-506, identified as figure 1, is attached for information only).

(Copies of specifications, standards and drawings, required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. Fiberboard for the blank shall be type CF, class domestic, variety SW, grade 125, B flute in accordance with PPP-F-320 (see 6.4).



Source: https://assist.dla.mil -- Downloaded: 20261O-21T22:02Z
Check the source to verify that this is the current version before use.

3.2 Design and construction. The blank shall be die-cut from material specified in 3.1 with perforations and creases as shown on Drawing 10-1-506. When set up, the blank shall form into a box. The end cut-outs may be secured with staples specified in PPP-B-636 or with tape conforming to PPP-T-60 or PPP-T-76. The dimensions and tolerances for all size boxes shall be as shown on Drawing 10-1-506.

3.3 Marking. Unless otherwise specified (see 6.2), each box shall be marked with the box makers certificate, specification number, and box size. All markings are limited to 6.25 square inches (4030/mm$^2$) in an area located in a lower corner of one outside side panel. Letters other than box markers certificate shall be approximately 3/8 inch (10 mm) high. Arrangement of markings shall be as follows:

BOX MAKERS CERTIFICATE
SPEC - SIZE

3.4 Workmanship. The completed box shall be clean, free of frayed or torn edges, improperly aligned panels, improper scores and slots, and the marking shall be clear and legible. All dimensions of the blank shall be accurately cut, scored and slotted so that the assembled box parts fit closely without undue binding. No flap shall project beyond an edge of the box by more than 1/8 inch (3 mm) when the box is set up and closed. All staples shall be well clinched, flush with or below the surfaces of the corrugated fiberboard. The tape shall be evenly applied.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, or qualified in this specification or applicable purchase documents.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:02Z
Check the source to verify that this is the current version before use.

4.3 Inspection of the end item.

4.3.1 End item inspection. Examination shall be in accordance with the defects listed in table I. The acceptable quality level (AQL) shall be 4.0 expressed in terms of defects per hundred units. The inspection level shall be S-2. The sample unit shall be one box blank assembled into a box.

TABLE I. Examination of the end item for visual defects

| Examine | Defect |
|---|---|
| Design and construction | Line scores not located as shown on Drawing 10-1-506.<br>Perforations not positioned as shown on Drawing 10-1-506.<br>Corrugations not in direction shown on Drawing 10-1-506.<br>End cuts not positioned as shown on Drawing 10-1-506.<br>Split facings.<br>Ragged edges. |
| Marking | Omitted; incorrect; illegible; of improper size, location, sequence, or method of application. |
| Workmanship | Edges of slits uneven or crushed.<br>Distorted corrugation structure on areas other than edges for scoring.<br>Perforations and creases not properly spaced.<br>Perforations and slits not cut as shown on Drawing 10-1-506. |

4.3.2 Examination of the end item for dimensional defects. Any dimension that is not within the specified tolerance, shall be classified as a defect. The sample unit for this examination shall be one box. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 4.0 expressed in terms of defects per hundred units.

4.3.3 Packaging inspection. An examination shall be made to determine that packing, and markings comply with PPP-B-638.

5. PACKAGING

5.1 Packing and marking. Packing and marking shall be in accordance with the requirements of PPP-B-638, Level A, B, or C, as specified (see 6.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:02Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The boxes covered by this specification are intended for use as containers in the shipment by mail and storage of maps, blueprints, drawings, etc.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) When marking shall not be as specified (see 3.3).
(d) Selection of applicable level of packing (see 5.1).

6.3 Metric equivalents. Metric equivalents, indicated in parentheses throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E 380 Standard for Metric Practice, and are for information only. In each instance, the value stated in US customary units shall be controlling.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.1).

6.5 Disposability. One or more of the following methods shown in order of their preference shall be used to accomplish disposal of MIL-B-43692 fiberboard boxes: reuse, baling, recycling, incineration, pyrolysis, composting, sanitary landfill, or sea disposal.

6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:02Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - SA
Air Force - 69

Review activities:

Army - SM
Air Force - 99

User activities:

Army - AR
Navy - MC


Preparing activity:

Army - GL

Project No. 8115-0250



Source: https://assist.dla.mil -- Downloaded: 202640-21T22:02Z
Check the source to verify that this is the currentversion before use.

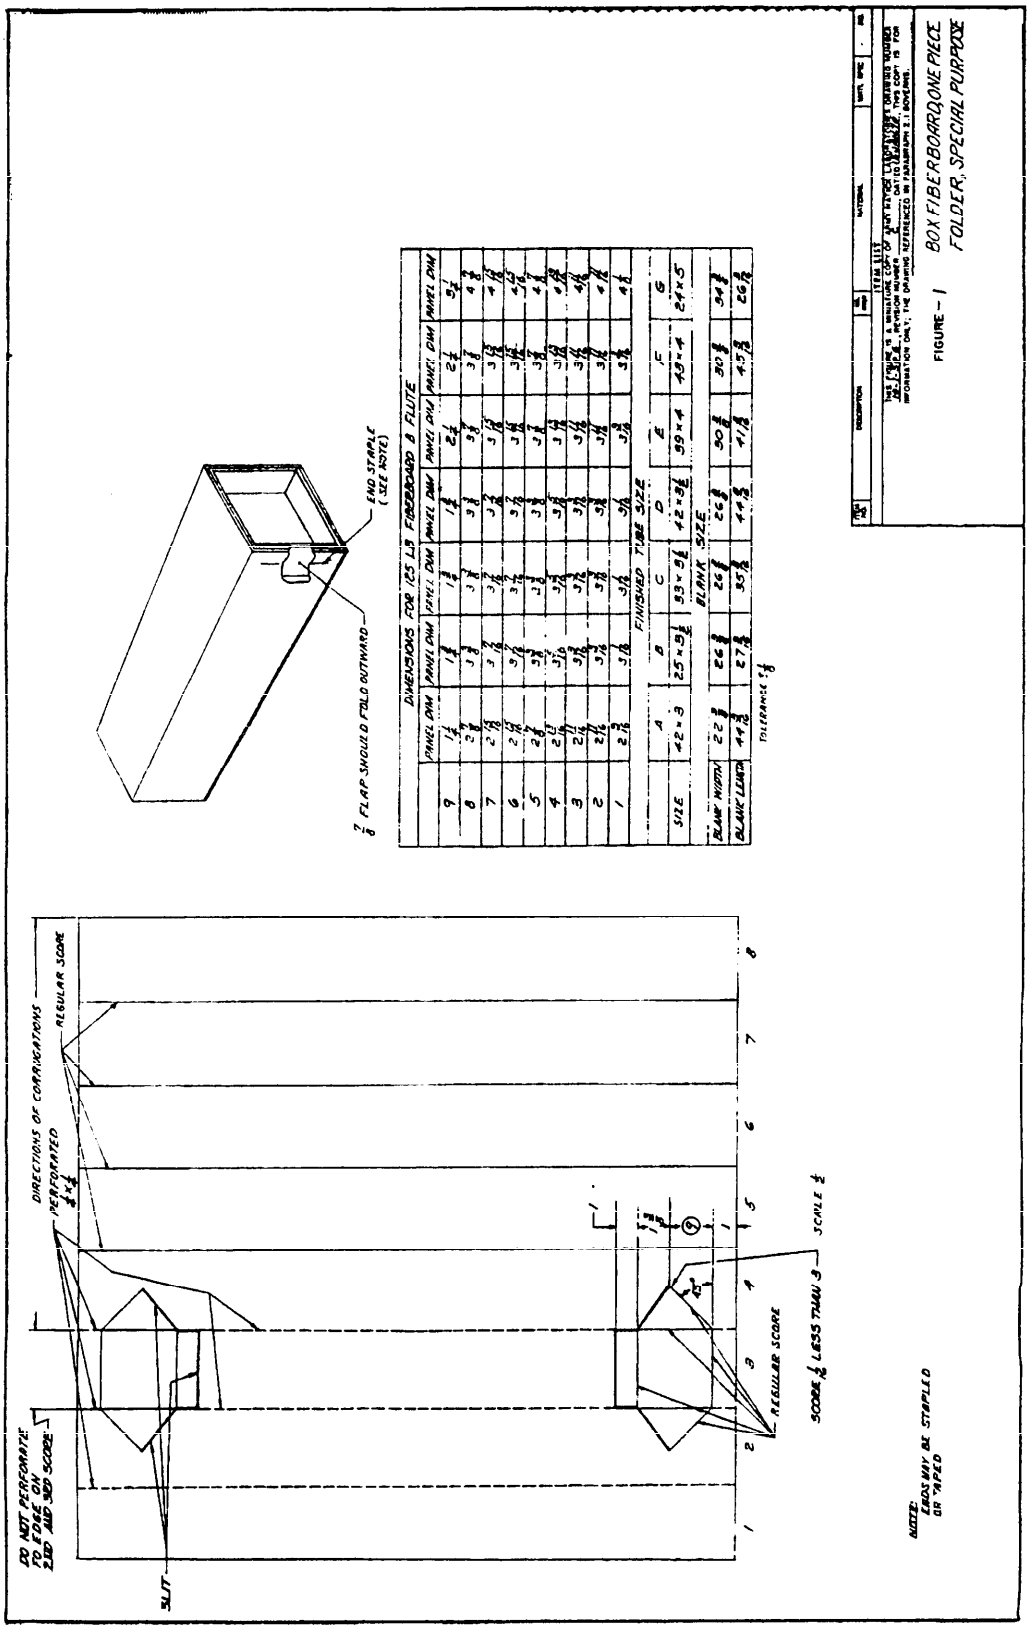




Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:02Z
Check the source to verify that this is the current version before use.

## STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-B-43692A Boxes, Fiberboard, One-Piece Folder, Special Purpose

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:02Z
Check the source to verify that this is the current version before use.

FOLD

**DEPARTMENT OF THE ARMY**
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

DRDNA-ES

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S. MAIL

Commander
US Army Natick Research and Development Command
ATTN: DRDNA-ES
Natick, MA 01760

NATICK OP 1 JUL 77
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:02Z
Check the source to verify that this is the current version before use.