


This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-S-13625(AT)

Form Approved
OMB No. 0704-0188

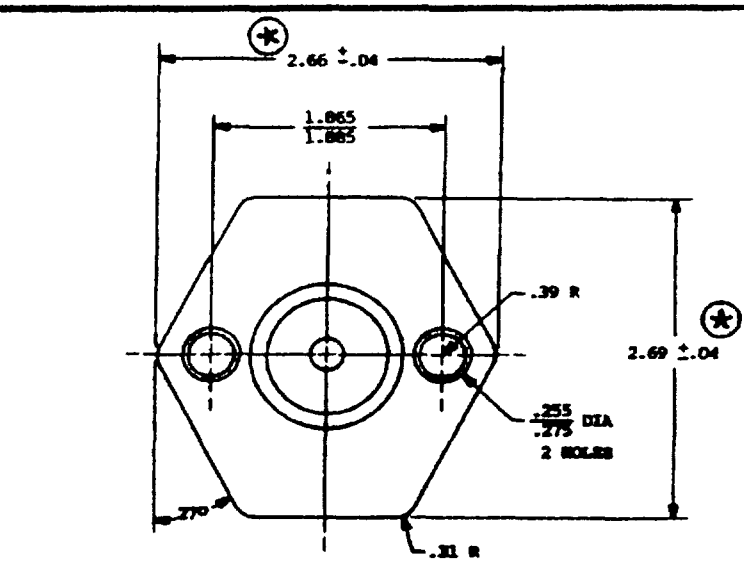

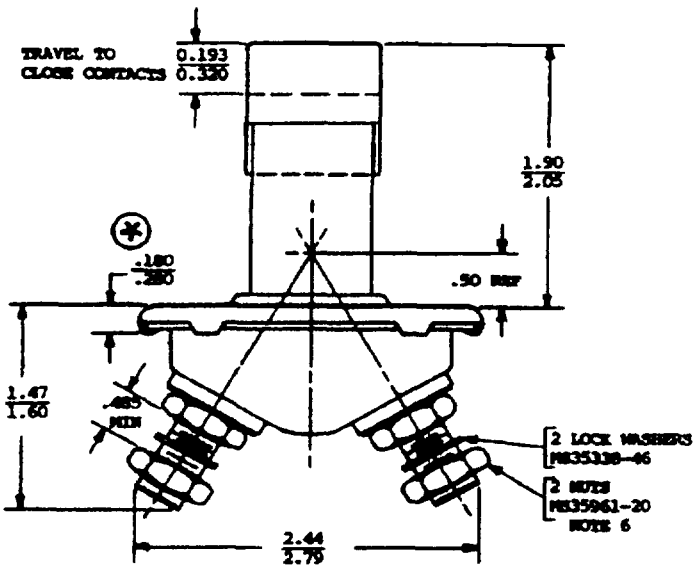

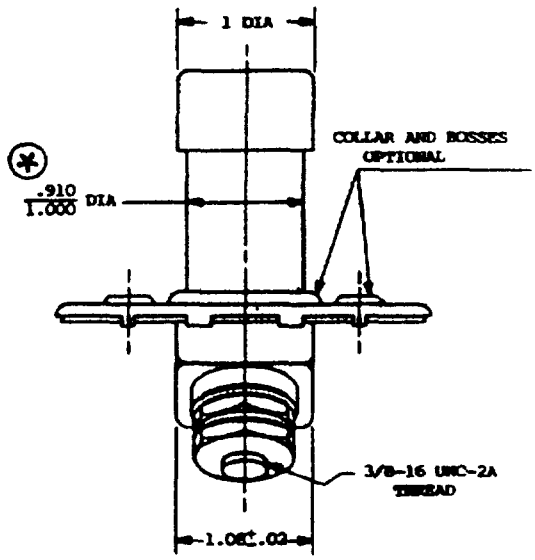

NOTES:
1. TYPE IV (SINGLE POLE, SINGLE THROW, HEAVY DUTY, NORMALLY OPEN), CLASS A (SLOW MAKE AND BREAK), GRADE 2 (OPEN) OF PROCUREMENT SPECIFICATION.
2. 300 AMP RESISTIVE LOAD, 180 AMP INDUCTIVE LOAD
3. FORCE REQUIRED TO OPERATE THE SWITCH SHALL BE 12 ±2 POUNDS
4. SHALL WITHSTAND A MINIMUM OVERLOAD FORCE OF 300 POUNDS WITHOUT DAMAGE
5. SHALL NOT EXCEED A MAXIMUM WEIGHT OF 11 OUNCES.
6. NUT SHALL NOT BE COATED WITH BLACK OXIDE
7. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARD FOR FEDERAL SERVICES HANDBOOK H28.
8. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 01 ON DECIMALS, ±0° 30' ON ANGLES.
9. FOR DESIGN FEATURE PURPOSES, THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. THIS SPECIFICATION SHEET IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS OR REFERENCED DOCUMENTS.
11. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
12. MARKING SHALL CONSIST OF THE PART OR IDENTIFYING NUMBER (PIN) AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

(*) DENOTES CHANGES MADE IN CONJUNCTION WITH CONVERSION FROM MILITARY STANDARD TO SPECIFICATION SHEET FORMAT.

PART OR IDENTIFYING NUMBER (PIN)	SUPERSEDES	
	MS PART NO.	FORMER PART NO.
MIL-S-13625/1-1	MS27199-1	6200102

PREPARING ACTIVITY: ARMY-AT
CUSTODIANS: ARMY-AT NAVY-AIR FORCE-
REVIEW: ARMY-MI, DLA-ES
USER: ARMY-ME
PROJECT NUMBER: 5930-A665-01

MILITARY SPECIFICATION SHEET
TITLE:
SWITCHES, PULL, SWITCHES, PUSH; SWITCHES, BEAM SELECTING, HEADLIGHT: ELECTRICAL (28 VOLTS DC MAXIMUM, FOR MILITARY VEHICLES)

SPECIFICATION SHEET NUMBER:
MIL-S-13625/1(AT)
5 NOVEMBER 1990
SUPERSEDING:
MS27199B, 12 MARCH 1968
AMSC-N/A FSC-5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:57Z
Check the source to verify that this is the current version before use.