Department of the Navy


PALLETIZING
DOMESTIC UNIT LOAD


COUNTER WEIGHTS (UPPER AND LOWER) LD 624589-INERT
(IN CONTAINER, MODIFIED LD 269790)

UNIT LOAD DATA

NUMBER OF COUNTER WEIGHTS PER CONTAINER (UPPER AND LOWER)	(SET)	1
GROSS WEIGHT OF ONE CONTAINER	(Lbs.)	66.5
NUMBER OF CONTAINERS PER UNIT LOAD		32
NUMBER OF COUNTER WEIGHTS PER UNIT LOAD	(SETS)	32
WEIGHT OF PALLET AND DUNNAGE (ESTIMATED)	(Lbs.)	130
WEIGHT OF UNIT LOAD (ESTIMATED)	(Lbs.)	2258
CUBE	(Cu. Ft.)	47.6

DO NOT STACK MORE THAN 4 UNIT LOADS HIGH IN STORAGE

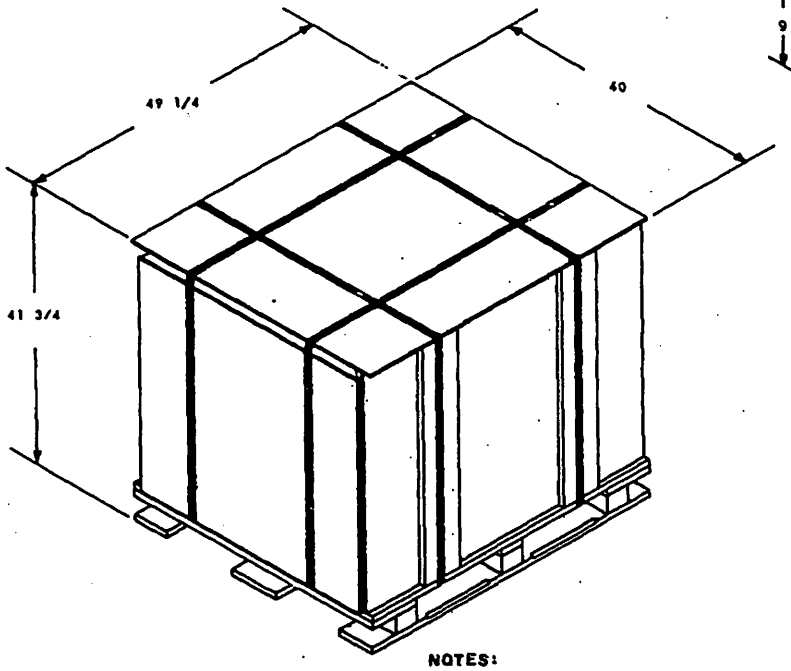

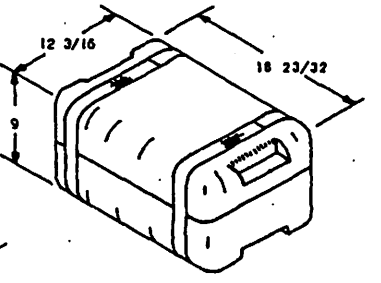

CONTAINER
DWG 10001-1330491

NOTES:
1. FOR GENERAL PALLETIZING REQUIREMENTS SEE MIL-STD-1322 (NAVY).
2. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

MIL-STD NUMBER	ASSOCIATED PROCESS
1320-2	TRUCKLOADING
1325-100	CARLOADING

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER.

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:54Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(a) PREFABRICATE SIDE PANELS BY NAILING THROUGH PLYWOOD, PC. 3, INTO BATTEN, PC. 2, WITH FOUR 4d NAILS AND CLINCH.

(b) THREAD STRAPPING, PC. 6, THROUGH NOTCHES IN PALLET, PC. 1, AS SHOWN IN DETAIL A.

(c) POSITION CONTAINERS ON PALLET AS SHOWN IN CONTAINER PATTERN DETAIL.

(d) CENTER TOP PANEL, PC. 5, ON CONTAINERS.


(e) POSITION SIDE PANELS.

(f) POSITION STRAPPING, PC. 7, UNDER PALLET DECK AND AROUND UNIT LOAD, TENSION AND SECURE WITH DOUBLE CRIMPED SEAL, PC. 8.


(g) POSITION STRAPPING, PC. 6, AROUND UNIT LOAD AND SECURE WITH DOUBLE CRIMPED SEAL.

MARKING:


IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY ORDER OR CONTRACT, UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

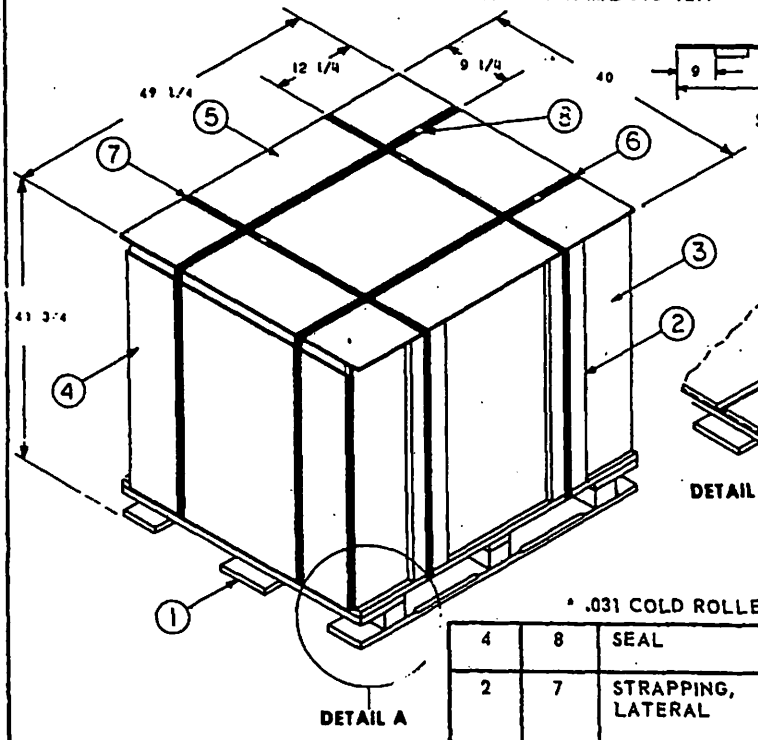


DETAIL A



SIDE PANEL



PLAN VIEW
CONTAINER PATTERN
4 LAYERS HIGH



DETAIL A

NOTE:
WHEN PALLET MIL-P-15011 IS NOT AVAILABLE, MIL-P-3938 MAY BE USED.

* .031 COLD ROLLED, HEAT TREATED MAY BE SUBSTITUTED.

DEPALLETIZING PROCEDURE

(a) CUT AND REMOVE STRAPPING.
(b) REMOVE PANELS.
(c) REMOVE CONTAINERS.

REQ.	ITEM	DESCRIPTION	MAT'L.	MAT'L. SPEC.	DIMENSIONS
4	8	SEAL	STEEL, COATED	COM'L.	3/4 X 22 GA. MIN.
2	7	STRAPPING, LATERAL	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 * X 14 FT. 6
2	6	STRAPPING, LONGITUDINAL	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 * X 15 FT. 6
1	5	TOP PANEL	PLYWOOD	NN-P-530 TYPE I	40 X 48 X 1/4
2	4	END PANEL	PLYWOOD	NN-P-530 TYPE I	37-1/2 X 35 X 1/4
2	3	SIDE PANEL	PLYWOOD	NN-P-530 TYPE I	35-7/8 X 48 X 1/2
4	2	BATTEN	WOOD, DRESSED	MM-L-751	1 X 6 X 35-7/8
1	1	PALLET	WOOD	MIL-P-15011 (SEE NOTE)	40 X 48 X 5-1/2

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:54Z
Check the source to verify that this is the current version before use.