MILITARY STANDARD

MIL-STD-1323-297 (NAVY)

2 NOVEMBER 1979


UNIT LOAD
FOR UNDERWAY REPLENISHMENT
GUIDED MISSILE BGM-71A-1 (TOW) OR BTM-71C (INERT)
IN ADAPTER ADU-486/E

UNIT LOAD DATA


NUMBER OF MISSILES PER CONTAINER	1
GROSS WEIGHT OF ONE CONTAINER (APPROX)	90 LBS.
NUMBER OF CONTAINERS PER UNIT LOAD	8
WEIGHT OF PALLET (APPROX)	94 LBS.
WEIGHT OF ADAPTER (APPROX)	193 LBS.
WEIGHT OF STEEL STRAPPING (APPROX)	10 LBS.
WEIGHT OF UNIT LOAD (APPROX)	1017 LBS.
CUBE	56.6 CU. FT.

DO NOT STACK MORE THAN
4 UNIT LOADS HIGH IN STORAGE

DODIC/NALC NO.	PA66	—
HAZARD CLASSIFICATION		
DOT	A	INERT
CG	XC	INERT

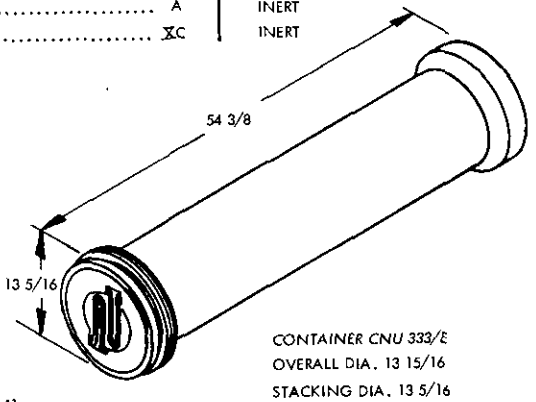

CONTAINER CNU 333/E
OVERALL DIA. 13 15/16
STACKING DIA. 13 5/16

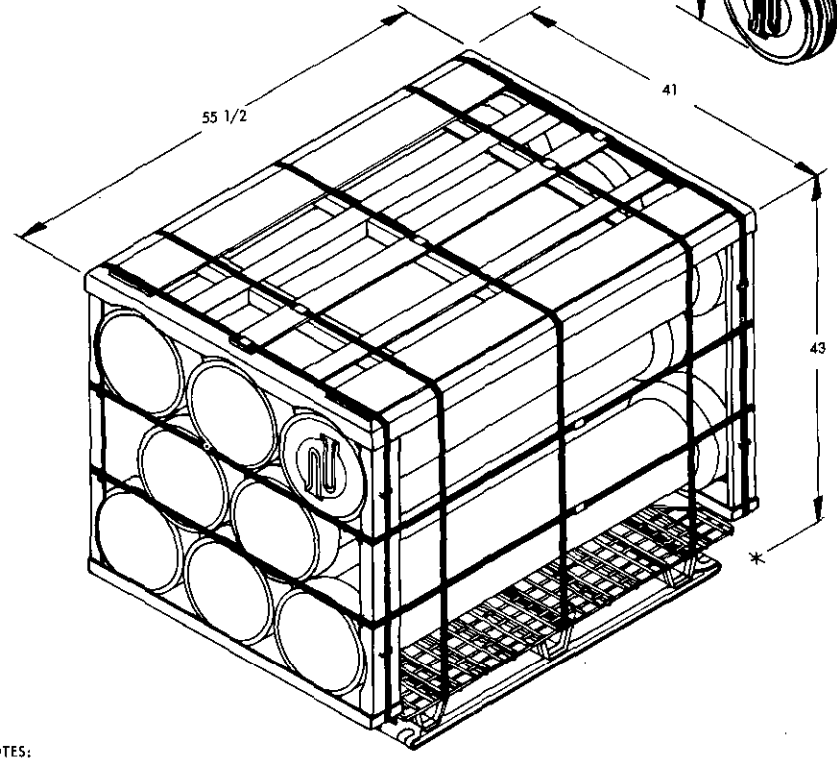

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

M.S. Gray NWHC 11/1/79
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly 11/6/79
SIGNATURE AIRSYSCOM, BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY)

ORIGINATOR Marie McBride 11/1/79
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil — Downloaded: 2026-10-23 12:58:52
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(a) POSITION BASE FRAME, PC. 8, ON PALLET WITH EQUAL OVERHANG ALL AROUND. POSITION STRAPPING, PC. 2, AT NOTCH IN BASE FRAME AND UNDER PALLET DECK, TENSION STRAP AND DOUBLE NOTCH SEAL, PC. 4, AS SHOWN IN DETAIL A.

(b) LOAD BOTTOM LAYER OF CONTAINERS ON THE BASE FRAME, PC. 8, WITH COVER ENDS OF CONTAINERS TOWARD THE COVER END OF THE FRAME.

NOTE

CONTAINERS MUST BE PROPERLY ORIENTED AND POSITIONED TO ASSURE THAT STACKING GROOVES ARE INTERLOCKED, CONTAINERS ARE LEVEL, AND ENDS ARE FLUSH.

(c) POSITION CORNER POSTS, PCS. 9 & 10, AND THREAD STRAPPING, PC. 3, GIRTHWISE THROUGH BOTTOM SLOTS IN CORNER POSTS. TENSION SUFFICIENTLY TO HOLD CORNER POSTS IN THE APPROXIMATE VERTICAL POSITION.

(d) LOAD THE TWO CONTAINERS OF THE SECOND LAYER AND THE MIDDLE CONTAINER OF THE TOP LAYER, ORIENTING CONTAINERS IN THE SAME DIRECTION AS THE BOTTOM LAYER.

(e) THREAD STRAPPING, PC. 3, GIRTHWISE THROUGH TOP SLOT IN CORNER POSTS. TENSION SUFFICIENTLY TO MAINTAIN APPROXIMATE VERTICAL POSITION OF THE CORNER POSTS AND ALLOW POSITIONING OF THE TOP LAYER OUTBOARD CONTAINERS.


(f) LOAD THE TOP LAYER OUTBOARD CONTAINERS IN THE SAME DIRECTION AS THE OTHER CONTAINERS.

(g) POSITION TOP FRAME, PC. 11, OVER CORNER POSTS WITH SCALLOPS AT THE COVER END. TENSION GIRTHWISE STRAPPING, PC. 3 AND DOUBLE NOTCH SEAL, PC. 5.


(h) THREAD STRAPPING, PC. 6, THROUGH CORNER POSTS SLOTS AND AROUND UNIT LOAD. TENSION STRAP AND DOUBLE NOTCH SEAL, PC. 5.

(i) POSITION STRAPPING, PC. 7, UNDER PALLET DECK AND AROUND UNIT LOAD. TENSION STRAP AND DOUBLE NOTCH SEAL, PC. 5.

MARKING : THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323 (NAVY).

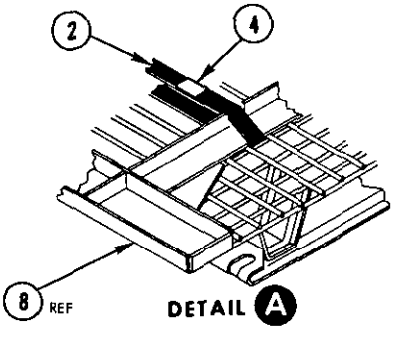

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:58Z
Check the source to verify that this is the current version before use.

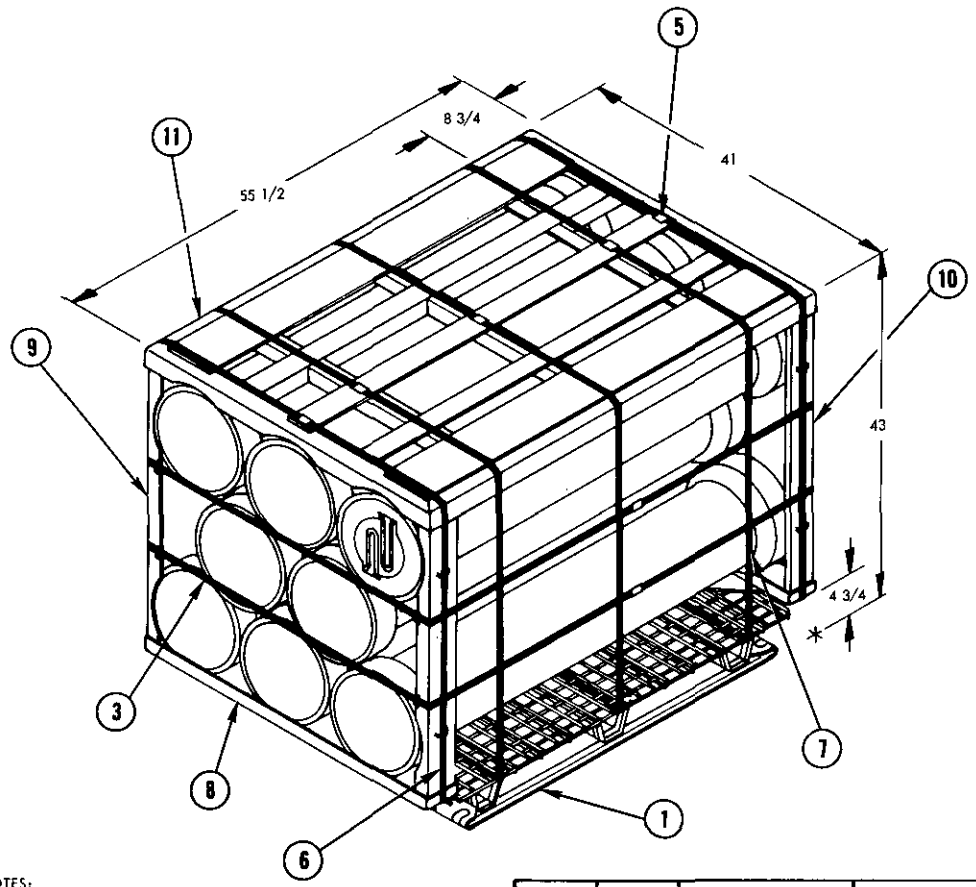

NOTES:

1. UNLESS OTHERWISE SPECIFIED MATERIAL SHALL BE IN ACCORDANCE WITH THE GENERAL DOCUMENT MIL-STD-1323 (NAVY).
2. COLD ROLLED, HEAT TREATED .031 STRAPPING MAY BE SUBSTITUTED.

DEPALLETIZING PROCEDURE

(a) MISSILES CAN BE REMOVED FROM CONTAINERS WITHOUT DEPALLETIZING UNIT LOAD.

(b) WHEN REFURBISHMENT OF CONTAINERS OR ADAPTER IS REQUIRED, DEPALLETIZE AS FOLLOWS:

(1) CUT AND REMOVE STRAPPING PCS. 6 AND 7.
(2) REMOVE TOP ADAPTER FRAME, PC. 11.
(3) REMOVE TOP LAYER OF CONTAINERS.
(4) CUT AND REMOVE TOP GIRTH STRAPPING, PC.3.
(5) REMOVE CENTER LAYER OF CONTAINERS.
(6) CUT AND REMOVE BOTTOM GIRTH STRAPPING, PC. 3. REMOVE CORNER POSTS PCS. 9 AND 10.
(7) REMOVE BOTTOM LAYER OF CONTAINERS.
(8) CUT AND REMOVE STRAPPING PC. 2. REMOVE BOTTOM FRAME AND PALLET.

LIST OF MATERIALS

REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1	11	TOP FRAME PALLET ADAPTER ADU-486/E	1254AS101	
2	10	CORNER POST, BASE PALLET ADAPTER ADU-486/E	1254AS104	
2	9	CORNER POST, COVER PALLET ADAPTER ADU-486/E	1254AS103	
1	8	BOTTOM FRAME PALLET ADAPTER ADU-486/E	1254AS102	
3	7	STRAPPING	SEE NOTES 1 & 2	3/4 X .035 X 14 FT 4
2	6	STRAPPING	SEE NOTES 1 & 2	3/4 X .035 X 14 FT 4
7	5	SEAL	SEE NOTE 1	3/4
2	4	SEAL	SEE NOTE 1	1 1/4
2	3	STRAPPING	SEE NOTES 1 & 2	3/4 X .035 X 17 FT
2	2	STRAPPING	SEE NOTES 1 & 2	1 1/4 X .035 X 5 FT
1	1	PALLET MK 3 MOD 0	564200	40 X 48

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:58Z
Check the source to verify that this is the current version before use.