
FEDERAL SPECIFICATION SHEET


# CONNECTOR, CABLE OUTLET, ELECTRICAL, SPECIFIC PURPOSE, SINGLE, GROUNDING, LOCKING, 2 POLE, 3 WIRE, 30 AMPERES, 120 VOLTS, 400 HERTZ, 1 PHASE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of W-C-596.

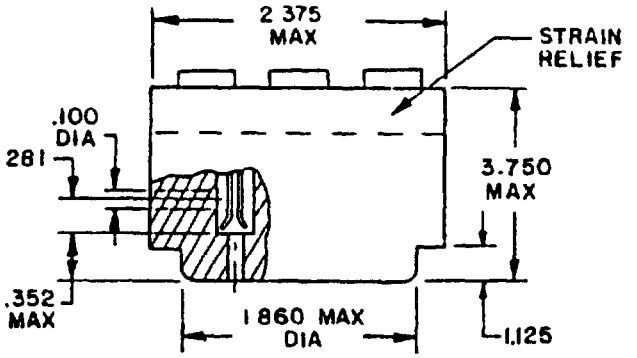


| Inches | mm |
|---|---|
| .093 | 2.36 |
| .100 | 2.54 |
| .105 | 2.67 |
| .109 | 2.77 |
| .114 | 2.90 |
| .134 | 3.40 |
| .281 | 7.14 |
| .352 | 8 94 |
| .500 | 12.70 |
| I 125 | 28.58 |
| 1.860 | 47.24 |
| 3.750 | 95.25 |

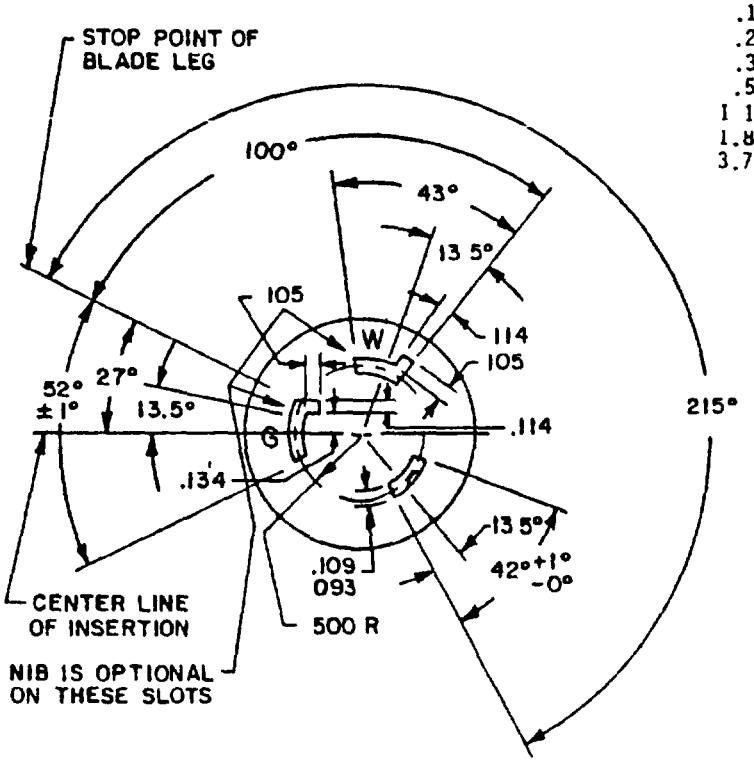


NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 005 ( 13 mm) on all decimals and ± 5° on angles

FIGURE 1 Connector design and configuration.

(A) denotes changes

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration: See figure 1.

Armored construction: Not acceptable.

Ratings:
Voltage: 120 volts, 1 phase.
Current: 30 amperes.
Frequency: 400 hertz.

(A) Vibration: Method 204 of MIL-STD-202, test condition B (WC596/153-2 only).

(A) Shock. Method 213 of MIL-STD-202, test condition I (WC596/153-2 only).

Mating connector: W-C-596/152.

Strain relief: Accommodate cable diameter .296-.625 inch (7.52-15.88 mm).

Part number: WC596/153-1, WC596/153-2 (ruggedized).

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - YD
Air Force - 85

Review activities:
Army - MI
Navy - EC, AS
Air Force - 11, 99

User activities:
Army - ME, AV
Navy - MC, SH

Preparing activity:
DLA - ES

Civil agency coordinating activities:
DCGOVT - DCG
DOT - ACO
GSA - FSS, PCD
HEW - FEC
Interior - BPA
USDA - BPA

(Project 5935-3660-06)

---

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of the general specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:32Z
Check the source to verify that this is the current version before use.