
MIL-C-55302/109A
31 May 1979
SUPERSEDING
MIL-C-55302/109
1 AUG 1975

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, PRINTED WIRING BOARD GENERAL PURPOSE COMPOSITE, RECEPTACLE, CONTACT SPACING (.100)SINGLE ROW, TYPE C

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

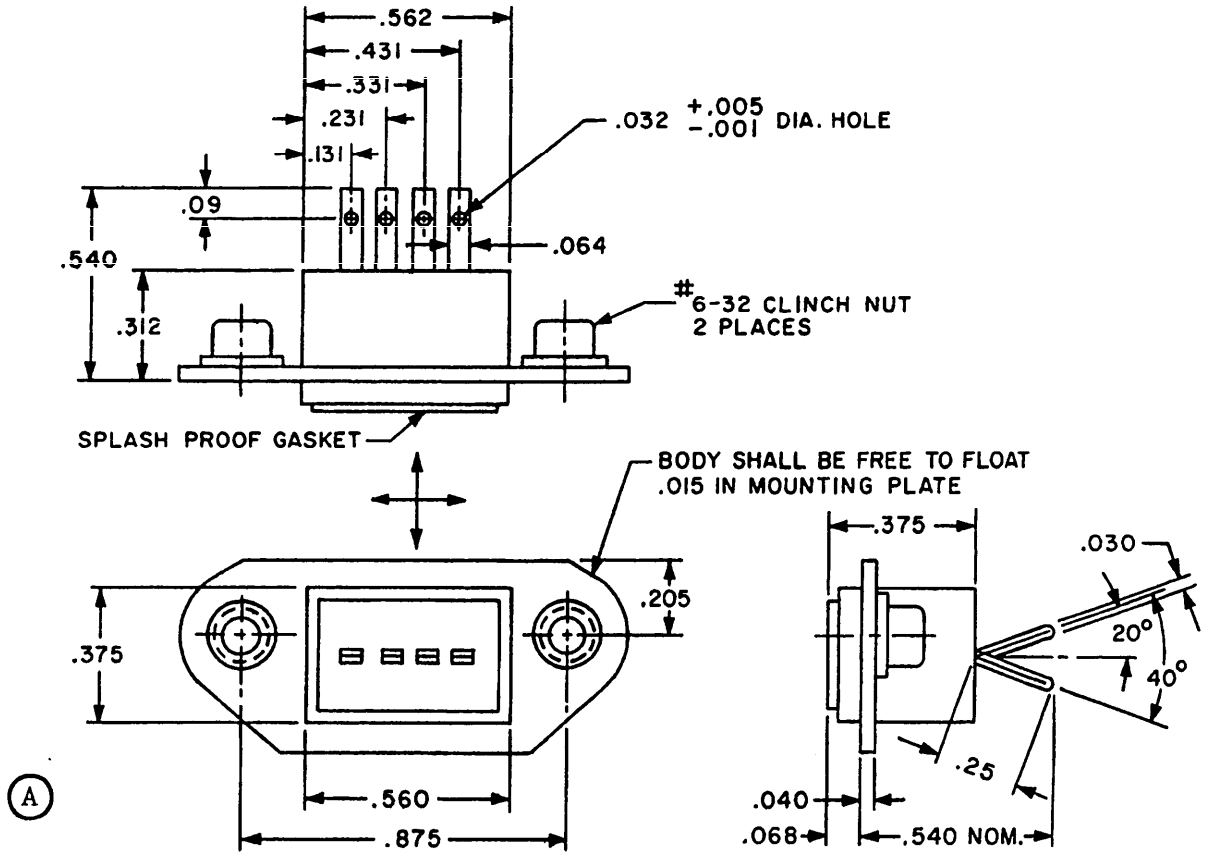

(A) DENOTES CHANGES

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:50Z
Check the source to verify that this is the currentversion before use.

INCHES	mm	INCHES	mm	INCHES	mm
.001	.03	.100	2.54	.540	13.72
.005	.13	.131	3.33	.562	14.27
.010	.25	.231	5.87		
.015	.38	.312	7.92		
.032	.81	.331	8.41		
.064	1.62	.431	10.95		

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .010.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

REQUIREMENTS:

1. Connectors are intended for use with MIL-P-7788 or MIL-P-83335 Information Panels. They may be used with either printed circuit board or embedded wiring type panels.

2. Materials:

   Contact: Female
   Berylium copper #25 alloy per QQ-C-533 Cond. A,
   Heat Treat: per MIL-H-7199 (Rockwell 15N-76.5)
   Finish: Gold Plate .00005 inch per MIL-C-45204
   Type I, Grade C or D, Class 1 over a nickle
   underplating. The nickle shall be plated in
   accordance with QQ-N-290, Class 1, Grade B.
   Housing: Receptacle,
   Noryl #731-201 per MIL-P-46129.
   Splash Proof Gasket:
   Silicone Rubber.
   Mounting Hardware: 6-32 Self-locking Nut Steel Cad Plated
   or equivalent.

3. Contact current rating: 3.0 ampere max.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:50Z
Check the source to verify that this is the current version before use.

The government has a royalty-free license under U.S. Patent No. 3,649,953 dated March 14, 1972 entitled "Self-Locating Electrical Connector for Large planar surfaces" for the benefit of manufacture of this connector either for the government or for use in equipment to be delivered to the government.

Custodians:
Army - AV
Navy - AS
Air Force - 17

Review Activities:
Army - MI
Air Force - 99,11

Preparing Activity:
Navy - AS
(Project No. 5935-3100)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.