[INCH-POUND]
A-A-3051
November 6, 1996

COMMERCIAL ITEM DESCRIPTION

FRAME, COPING SAW

The General Services Administration has authorized the use of this Commercial Item Description for procurement of type VII, style A and B specified in GGG-F-671 for all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers coping saw frames used in conjunction with blades for light-duty cutting of wood or soft miscellaneous material.

2. CLASSIFICATION.

2.1 Classification. This Commercial Item Description shall be of the following styles:

Style A - Medium throat

Style B - Deep throat

3. SALIENT CHARACTERISTICS.

3.1 Design. The saw frame shall consist of high quality steel with a handle of composition material, or any suitable hard wood thoroughly seasoned, straight clear grained, finished smooth, and lacquered or suitably painted. The frame shall be heat treated to produce frames conforming to the requirements herein. The frame shall be non-adjustable and constructed to hold the blade securely under high tensions and shall maintain rigidity during long, hard use. The frame shall be coated with one or combination of bright chromium plate or nickel plate. The frame and handle shall remain assembled when the blade is not in place. The handle shall be shaped to provide a comfortable handgrip, and shall allow for adjusting the blade tension. A threaded sleeve within the handle shall be adequately secured to prevent it from turning or being withdrawn from the handle under high tension. A friction washer shall be provided between the handle and the frame. The length of the threaded section of the sleeve shall be four-fifths of the nominal diameter of the threaded section. The blade holding device shall be designed for holding pin-end or loop-end blades and shall be able to rotate 360 degrees. The blade-bearing surfaces shall be smoothly finished to provide a flat-bearing surface, and the finish shall protect against rust and corrosion. The frame shall conform to the requirements of Table I and be similar to Figure 1.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Kansas City, MO 64131.

Distribution Statement A. Approved for public release; distribution is unlimited. FSC 5110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

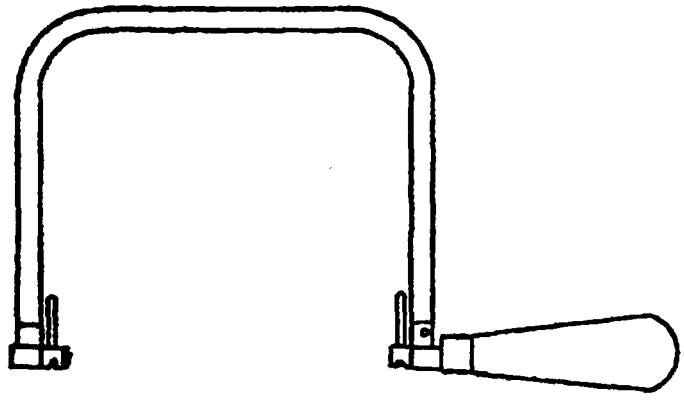


Figure 1. Frames, coping saw, medium throat and deep throat.

TABLE I. Dimensions, weight, and tension load for coping saw frames, medium throat and deep throat

Style	Capacity (blade length) (Inches)	Depth from teeth of blade to nearest inside edge or projection of frame		Weight (approximate) (Ounces)	Tension between saw grips
		Minimum (Inches)	Maximum (Inches)		Minimum (Pounds)
A	6-1/2	4-1/2	5-13/32	7	50
B	6-1/2	5-7/16	6-7/8	9	40

3.2 Identification marking. The tool shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.3 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformances prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING.

6.1 Packaging. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) When applicable, the specific styles, as specified in the Commercial Item Description.
(d) If bid samples are required, the number of samples required, and the subjective inspection requirements.
(e) If first article samples are required and the number of samples required.
(f) If lot sampling inspection is required and the applicable lot sampling requirements. For example:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:29Z
Check the source to verify that this is the current version before use.

Inspection. Each sample tool shall be examined and tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level of 4.0, expressed in terms of defects per hundred units.

(g) What preservation, packing, packaging, and marking of packages are required.

7.3 National Stock Numbers (NSNs). The following list of NSNs corresponds to the styles specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN

5110-00-555-9359

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:29Z
Check the source to verify that this is the current version before use.