GGG-L-36a
SEPTEMBER 14, 1953
SUPERSEDING
Int. Fed. Spec. GGG-L-0036 (Navy-Ships)
3 June 1952

FEDERAL SPECIFICATION

LADLES, DECK-PAYING

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 This specification covers deck-paying ladles suitable for filling deck seams with a waterproof composition such as pitch, tallow, or resin.

1.1.1 *Federal specification coverage.*—This specification does not cover all types, grades, and sizes of deck-paying ladles, but only those generally used by the Federal Government.

1.2 Classification.—This specification covers a deck-paying ladle of one type, grade, and size as hereinafter specified.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standard, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

NN-B-591—Boxes; Fiberboard, Wood-Cleated (for Domestic Shipment).
NN-B-601—Boxes, Wood-Cleated-Plywood, for Domestic Shipment.
NN-B-621—Boxes; Wood, Nailed and Lock Corner.
NN-B-631—Boxes; Wood, Wirebound (for Domestic Shipment).
LLL-B-631—Boxes; Fiber, Corrugated (for Domestic Shipment).
LLL-B-636—Boxes; Fiber, Solid (for Domestic Shipment).

Military Standard:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Federal Specifications and the Index of Federal Specifications and Standards may be obtained upon application accompanied by check, money order, cash, or Government Printing Office coupons, to the General Services Administration, Business Service Center, Region 3, Seventh and D Streets, SW, Washington 25, D.C. This office will also honor deposit account numbers issued by the Government Printing Office. Prices may be obtained from the Index of Federal Specifications and Standards or from the GSA Regional Offices. Single copies of this specification and other product specifications required for bidding purposes are available without charge at the GSA Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Copies of Military Standard referenced above, required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

2.2 Specifications applicable only to individual departments are listed in section 7.

3. REQUIREMENTS

3.1 Design and construction.

3.1.1 The cone-shaped body of the ladle shall be made from high-grade galvanized

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

sheet iron or steel, as specified (see 6.1), and shall be of the following thicknesses:

(a)	For body.....	0.025 inch
(b)	For head.....	.0375 inch

3.1.2 The handle shall be made from $\frac{1}{16}$- by 1-inch steel.

3.1.3 The bottom of the ladle shall have a small circular hole approximately $\frac{5}{32}$ inch in diameter. The upper part of the body shall have a rectangular-shaped hole approximately 2½ by 4 inches.

3.1.4 All joints, such as seam in the cone and where the head joins the cone, shall be made in such a manner as to insure their being leakproof when tested as specified in 4.2.2 The joint where head is secured to the body shall be of the rolled type, and the seam in the cone shall be of the flat interlocking type.

3.1.5 The handle shall conform to the shape and dimensions shown on figure 1, and shall be firmly attached to the head or cover by means of two or more rivets.

3.1.6 The ladle shall conform to the shape and dimensions shown on figure 1.

3.2 **Marking.**—Ladles shall be marked with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.3 **Workmanship.**—Workmanship shall be first class in every respect.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Sampling for lot acceptance.**

4.1.1 *Inspection lot.*—All ladles presented at one time shall be considered a lot for purposes of acceptance, inspection, and tests.

4.1.2 *Sampling for inspection.*—A random sample of ladles shall be taken from each inspection lot of material offered for Government inspection of visual and dimensional characteristics with lot acceptance based on the following sampling inspection requirements of table I in accordance with the procedures of Military Standard MIL-STD-105.

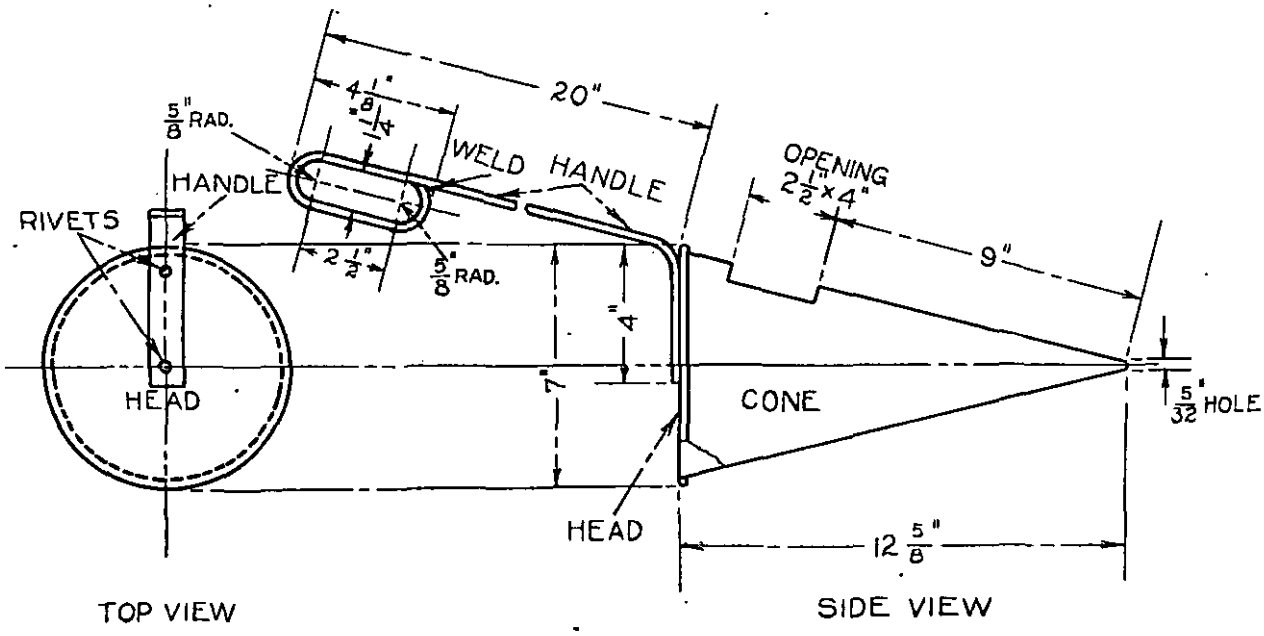


FIGURE 1.—Deck-paying ladle (all dimensions in inches).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

TABLE I.—*Sampling for visual and dimensional inspection AQL (approx.) = 2.5 percent defective*

Number of ladles in inspection lot	Number of ladles in sample	Acceptance number (defectives)	Rejection number (defectives)
15 and under	7	0	1
16 to 40	10	0	1
41 to 110	15	1	2
111 to 300	25	1	2
301 to 500	35	2	3
501 to 800	50	3	4
801 to 1,300	75	4	5
1,301 and over	110	6	7

NOTE: The Government inspector may institute tightened or reduced inspection in accordance with section 9 of Military Standard MIL-STD-105.

4.1.3 *Sampling for tests.*—A random sample of ladles shall be selected from each inspection lot in accordance with table II, and each ladle shall be subjected to the leakage test specified in 4.2.2.

TABLE II.—*Sampling for lot acceptance*

Number of ladles in inspection lot	Number of ladles in sample	Acceptance number (items failing in the test)	Rejection number (items failing in the test)
15 and under	5	0	1
16 to 40	7	0	1
41 to 110	10	0	1
111 to 300	15	0	1
301 to 500	25	1	2
501 to 800	35	1	2
801 to 1,300	50	2	3
1,301 and over	75	3	4

4.2 Inspection.

4.2.1 *Visual and dimensional inspection.*—Each of the sample ladles selected in accordance with table I shall be visually and dimensionally inspected by the Government inspector to verify compliance with this specification. Any ladles in the sample containing one or more visual or dimensional defects shall be rejected, and if the number of defective ladles in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected. Rejected lots may be offered again for Government inspection provided the contractor has repaired or removed all nonconforming ladles. The Government inspector shall again select and examine samples from such resubmitted lots to verify compliance with this specification.

4.2.2 *Leakproof test.*—The hole in the small end of the cone shall be plugged so that the cone will hold water. The cone shall then be filled with water through the 2½-by-4-inch opening, up to that opening, and held for not less than 2 minutes to observe whether there is any leakage of water at the seams. The ladle will then be inverted and submerged, head down in water to a point where the water line approaches but does not reach the 2½-by-4-inch opening and held in that position for not less than 2 minutes to observe whether there is any leakage of water at the seam where the cone and the head join.

5. PREPARATION FOR DELIVERY

5.1 Cleaning and preservation. — Unless otherwise specified, ladles shall be cleaned and preserved in accordance with the manufacturer's standard practice.

5.2 Packaging.—Unless otherwise specified, commercial packages are acceptable, provided that only one size is contained in any one box or package.

5.3 Packing.—Unless otherwise specified, ladles, packaged as specified in 5.2, shall be packed in wood-cleated fiberboard, wood-cleated plywood, nailed wood, wirebound wood, corrugated fiber, or solid fiber boxes conforming to Federal Specification NN-B-591, NN-B-601, NN-B-621, NN-B-631, LLL-B-631, or LLL-B-636, respectively.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

The gross weight of fiberboard boxes shall be subject to the limitation of the box specification.

5.4 **Marking.**

5.4.1 *Interior containers.*—Unless otherwise specified, each box or package shall be plainly marked with the name of the article, the size, and the quantity contained therein, as defined by the contract or order under which shipment is made, and the name of the manufacturer.

5.4.2 *Exterior containers.*—Unless otherwise specified, shipping containers shall be marked with the name of the article, the size, the quantity contained therein, as defined by the contract or order under which shipment is made, the name of the contractor and the number of the contract or order.

6. NOTES

6.1 **Ordering data.** — Procurement documents should specify the following and should exercise any desired options offered herein (see 5.1, 5.2, 5.3, 5.4.1 and 5.4.2).

(*a*) The title, number, and date of this specification.
(*b*) Whether galvanized sheet iron or steel is required (see 3.1.1).
(*c*) Whether preparation for domestic or overseas shipment is required (see sec. 5 and 7.2.2).

6.2 THE ILLUSTRATION HEREIN IS DESCRIPTIVE AND NOT RESTRICTIVE and is not intended to preclude the purchase of deck-paying ladles otherwise conforming to this specification.

6.3 **Transportation description.**

6.3.1 Transportation description applicable to these items is:

Sheet steel ware, not otherwise indexed by name. (Specify whether nested or not nested).
Carload weight 20,000 pounds subject to rule 34 of Uniform Freight Classification.
Truckload volume weight 20,000 pounds.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specifications, of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments.

7.2 **Army and Navy.**

7.2.1 *Applicable specifications.*

Military Specification:

MIL-P-15424 — Packaging of Hand Tools; General Specification for Domestic and Overseas Preservation.

7.2.2 *Preparation for delivery.* — Ladles shall be cleaned, preserved, packaged, packed, and marked in accordance with Military Specification MIL-P-15424.

NAVY INTEREST: Sh S

This specification is a part of Section IV, Part 5, of the Federal Standard Stock Catalog.

Copies of this specification may be purchased for 5 cents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.