A-A-2489
August 15, 1988

COMMERCIAL ITEM DESCRIPTION

WRENCHES, ADJUSTABLE
(NONSPARKING AND NONMAGNETIC)

The General Services Administration has authorized the use of this commercial item description.

This commercial item description covers wrenches with adjustable openings and flat, parallel, and smooth jaws of the following types and made of a nonferrous alloy having a low sparking hazard and a low magnetic permeability.


Salient characteristics:

Type I, Open end. Open end type adjustable wrenches shall be similar to the following illustration with the jaw opening approximately 22-1/2 degrees angular to the handle centerline. The wrenches shall be of the following sizes and be capable of withstanding minimum torsion loads listed below for the National Stock Number (NSN) specified.



National Stock Number (NSN)	Nominal Size Designation	Overall Length (Inches) Minimum	Overall Length (Inches) Maximum	Widest Jaw Opening (Minimum)	Minimum Torsion Load (Inch-Pounds)
5120-00-278-0340	6-inch	5-1/2	6-1/2	0.760 inch	550
5120-00-293-0031	8-inch	7-1/2	8-1/2	0.947 inch	1000
5120-00-278-0341	10-inch	9-1/2	10-1/2	1.135 inch	1700
5120-00-264-3794	12-inch	11-1/2	12-1/2	1.322 inch	2600
5120-00-293-0008	15-inch	14-1/2	15-1/2	1.698 inch	4500

Type II, Monkey. Monkey type adjustable wrenches shall be similar to the following illustration with the jaw opening at a right angle to the handle centerline. The wrenches shall be of the following sizes and be capable of withstanding minimum torsion loads listed below for the National Stock Number (NSN) specified.

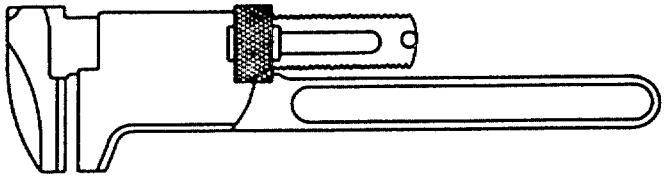

National Stock Number (NSN)	Nominal Size Designation	Overall Length (Inches) Minimum	Overall Length (Inches) Maximum	Minimum Jaw Opening Range (Inches)	Minimum Torsion Load (Inch-pounds)
5120-00-277-9086	8-inch	7	8-1/2	0 - 1-3/16	2500
5120-00-277-9087	10-inch	8-1/2	10-1/2	0 - 1-3/4	3800
5120-00-277-9088	12-inch	10-1/4	13-3/4	0 - 2-1/8	5500
5120-00-293-3009	15-inch	13	17	0 - 2-9/16	9000
5120-00-277-9089	21-inch	18	24	0 - 3-7/8	19000

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; disstribution is unlimited.

Material. Wrenches shall be made of beryllium copper or aluminum bronze alloy having an iron content not over five percent, and when present, it shall be well diffused throughout the alloy. When tested with a magnetic permeability indicator conforming to Military Specification MIL-I-17214, the magnetic permeability shall not be above 1.2 on the indicator scale.

Torsion loads. Each wrench shall be capable of withstanding a minimum torsion load as shown in the above tables without sustaining deformation or other defects which might affect the durability or serviceability of the wrench.

Workmanship. Wrenches shall be smoothly finished and free from burrs and rough edges. Adjusting nuts shall work smoothly without binding and without excessive play.

Marking. Each wrench shall be marked in a plain and permanent manner with name, abbreviation, or chemical symbol of the alloy, the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined, and the country of origin.

Quality assurance provisions. Sampling for inspection shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes, except where otherwise indicated herein. The lot size shall consist of all wrenches offered for acceptance at one time. A sample unit shall be one wrench.

A. Examination for design, dimensions and workmanship. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 percent defective.

B. Material. Material shall be ascertained by manufacturer's certification.

C. Torsion moment test. Torsion moment testing shall be in conformance with commercially accepted procedures. The inspection level shall be S-2 with an AQL of 4.0 percent defective.

Regulatory requirements. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes:

The issue of referenced documents in effect on the date of invitation for bid or request for proposals shall be used to determine compliance with the stated requirements. Sources for referenced documents may be determined by contacting the Contracting Officer.

MILITARY INTERESTS:

NONE: DoD has determined that no military activity has an official interest in this commercial item description.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.