A-A-866
May 12, 1980

COMMERCIAL ITEM DESCRIPTION

BOXES: PAPERBOARD, METAL EDGE (TELESCOPING)

The General Services Administration has authorized the use of this commercial item description in lieu of Federal Specification PPP-B-665.

This commercial item description covers the requirements for paperboard boxes with metal edge stays and telescoping tops.

Salient characteristics:

The boxes shall be of two classes and three styles for each (see figure 1). Class I shall be domestic and class II shall be water resistant. Metal edge stays shall be manufactured of cold rolled steel, coated on the exterior with lacquer, color as specified. The size of the stay shall be either 5/8 inch ± 1/64 inch wide, and 0.008 ± 0.0005 inch thick with 14 four-prong eyelets per 2-inch length for use with paperboard 0.03 to 0.05 inch thick; or 1 ± 1/64 inch wide, and 0.01 ± 0.0005 inch thick with four-prong eyelets per 2-inch length for use with paperboard 0.06 to 0.09 inch thick. When specified, the outside of the paperboard shall be treated with a non-reflective coating. A moisture resistant adhesive shall be used when laminating two or more thicknesses of paperboard to form a single board of the required thickness.

The assembled boxes (see figure 1) shall consist of one or more paperboard box blanks with metal edge stays. The stay shall be oriented and secured on box joints, as indicated in figure 1, so that the maximum number of eyelets are applied. Dimensions shall be inside measurements as specified, in the following order: Length (largest dimension), width (lesser dimension), an depth (remaining dimension). A tolerance of ± 1/16 inch will be permitted for each dimension. Thumb notches shall be provided for full telescope boxes (see figure 1). Boxes with neck or shoulder (see figure 1): The dimensions shall be inside measurements of the neck or collar; unless otherwise specified, lid and base shall be of equal depth and the sum of their depths shall equal the depth of the neck or collar of the inside depth of the box; the neck or collar shall extend to the bottom surface of the box and shall be provided with stays at the joints.

Workmanship. The boxes shall be free from any defect that may affect its serviceability, durability, or appearance.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.


Packaging, packing, and marking. The packaging and packing shall be in accordance with normal commercial practice and shall assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with the National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.

Note: Purchasers shall specify class, style of box required, and dimensions.


FSC 8115

GSA DC-01005588


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:10Z
Check the source to verify that this is the current version before use.



Style A - Full telescope



Style B - Shallow lid

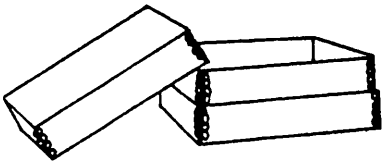

Style E - Neck or shoulder

Figure 1

Note. Styles A, B and E boxes shall be printed with the letter "L" on the surface of the lid and the letter "B" on one surface of the base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:10Z
Check the source to verify that this is the current version before use.