MIL-P-36056A
9 June 1970
SUPERSEDING
MIL-P-36056
29 May 1961

MILITARY SPECIFICATION

PROBE, WITH EYE, GENERAL OPERATING

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers probes, with eyes, for use in general surgical procedures.

1.2 Classification. Probes shall be of the following sizes as specified (see 6.1):

Size 1 - 5 inch
Size 2 - 8 inch
Size 3 - 10 inch

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:02Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Federal

GG-I-526	Instruments, Dental and Surgical, General Specifications.
MMM-A-250	Adhesive, Water-Resistant, (for Sealing Fiberboard Boxes).
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper, (for Carton Sealing).

Military

MIL-P-116	Preservation, Methods of.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

* 3.1 Material. The probes shall be fabricated from class 8, sterling silver material, in accordance with GG-I-526.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

* 3.2 Style, design, and dimensions. Probes shall be straight, with a bulbous tip on the distal end, and an eye in the proximal end for receiving ligature or tape. Probes shall be suitable for exploring wounds and introducing ligatures and tapes. Style, design and dimensions shall be in strict accordance with Figure 1, for appropriate size.

* 3.3 Finish. The probes shall have a bright finish. Finish on all edges and surfaces shall be uniform, and free from burrs, sharp edges, grind marks, rough areas, cracks, and overlaps. Probes shall be polished to remove all tool marks.

3.4 Identification marking. Probes made in U.S.A. shall be marked with the name or registered trademark of the contractor. Probes of foreign (other than U.S.) in addition to the above, shall also be marked with the name of the country of origin.

3.5 Workmanship. Workmanship shall be first class throughout. Probes shall be free from defects which detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

* 4.1.2 Certificates of quality. Certificates of quality, supplied by the manufacturer of the sterling silver, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the FSN, the item identification, the name of the material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

* 4.2.1 Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and as indicated in Table I. Unit of product for examination purposes shall be one probe.

Table I. Sampling for Examination

Type defect	Inspection level	AQL (percent defective)
Major	II	1.0
Minor	II	2.5

* 4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105, and as indicated in Table II Unit of product for test purposes shall be one probe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

Table II. Sampling Criteria for Tests

Component	Characteristic	Req't	Test procedure	Insp. level	AQL
Probe	Composition analysis	3.1	GG-I-526	----	*
	Dimensions	3 2	-----	S-2	4.0

* Acceptance number shall be zero

4 2.3 Raw materials. Sufficient quantity of each lot of sterling silver used in construction of the probes shall be selected for chemical analysis.

* 4.3 Examination. The probes shall be examined to determine compliance with all the requirements contained in this specification. Examination shall be conducted as specified in Tables I and III. Inspection, however, shall not be restricted to defects listed in Table III. Any probes in the sample containing one or more defects shall be rejected and if the number of defective probes in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Table III. Classification of Defects

Categories	Defects
Critical	None defined.
Major	
101	Bulbous tip not completely rounded and smooth.
102	Probe not free from cracks, burrs, slivers, sharp edges and tool marks.
103	Probe not of one-piece construction.
104	Finish of probes not bright.
Minor	
201	Probes not identified as specified in 3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

4.4 Tests. Tests shall be conducted, as necessary, to determine compliance with specification requirements.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One probe, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table IV shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	12 units	360 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3 1 Cleaning and drying. Each unit shall be thoroughly cleaned and dried in accordance with the applicable method as outlined in MIL-P-116.

5.I.3.2 Preservative. Not required.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:02Z
Check the source to verify that this is the current version before use.

5.1.3.3 Intimate wrap. Each unit shall be wrapped in neutral tissue or other suitable anticorrosive material.

5.1.3.4 Unit package. Each unit shall be packaged in accordance with MIL-P-116, method 1A-8.

5.1.3.5 Intermediate package. Intermediate package shall be a box of appropriate size and design constructed in accordance with PPP-B-636, type CF, class weather-resistant. Boxes shall be closed by taping the top and bottom flaps with 2 inch wide tape conforming to PPP-T-76. Closing of bottom flaps with adhesive conforming to MMM-A-250 or metal stitches is permitted.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) Applicable levels of packaging and packing.
(d) Federal stock number.

6.2 This specification is intended to cover the types which are normally procured to meet Military requirements. It does not cover all types, classes, grades, sizes, etc., of the commodity indicated by the title nor all types which are commercially available.

6.3 This specification covers the following items appearing in the Federal Supply Catalog:

Stock Number	Item Identification
6515-356-9100	PROBE, GENERAL OPERATING, 5 Inch
6515-356-9300	PROBE, GENERAL OPERATING, 8 Inch
6515-356-9500	PROBE, GENERAL OPERATING, 10 Inch

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:02Z
Check the source to verify that this is the currentversion before use.

* 6.4 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and Contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM


Project No. 6515-1168

Review activities:

Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:02Z
Check the source to verify that this is the current version before use.

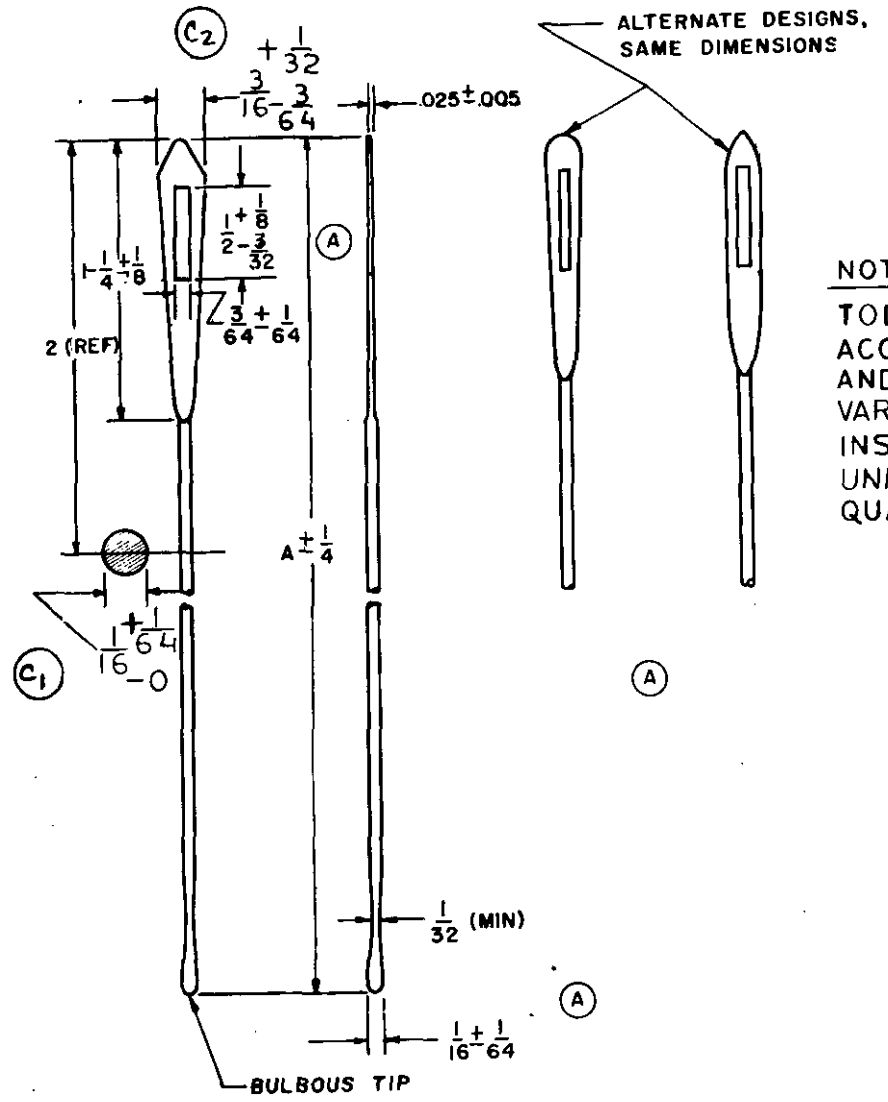

NOTE

TOLERANCES INDICATED DELINEATE ACCEPTABLE EXTREME DIMENSIONS, AND ARE NOT INTENDED TO PERMIT VARIATIONS WITHIN A SINGLE INSTRUMENT WHICH WILL SACRIFICE UNIFORMITY SYMMETRY AND FIRST QUALITY WORKMANSHIP.

(B)

SIZE	A
1	5
2	8
3	10

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 20260-21T08:02Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS/OFFERORS

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD.

Fold

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

DEFENSE SUPPLY AGENCY
OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

Fold

DPSC FORM 2418
MAR 68

EDITION AUG 66, WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-P-36056A FSN:

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64, WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:02Z
Check the source to verify that this is the current version before use.