MILITARY SPECIFICATION SHEET

SPLICE, FIBER OPTIC, SHIPBOARD MECHANICAL (ROTARY), FIBER (METRIC)

This specification is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-24623.

CLASSIFICATION

Splice type: M (Mechanical).
Fiber style: SM or MM (Single-mode or multimode).
Class: A (Fiber splice).

DESIGN AND CONSTRUCTION

Dimensions: See figure 1.
Weight: ≤ 3 grams.
Materials: Glass, ceramics, or composites.
Installation time: ≤ 15 minutes.

PERFORMANCE REQUIREMENTS

Environmental properties:
Temperature range: 4 (Operating: minus 28 to plus 85°C, Storage: minus 62 to plus 85°C.)
Nuclear radiation: N/A.
Freezing water: N/A.
Fluid immersion: N/A.
Sand and dust: N/A.


Intended use: This splice is intended for use in protected areas such as interconnection boxes or equipment cabinets. It is not intended for unsheltered use.

PART IDENTIFYING NUMBER: D24623/04-011.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:15Z
Check the source to verify that this is the current version before use.

PART IDENTIFYING NUMBER: D 24623/04-011

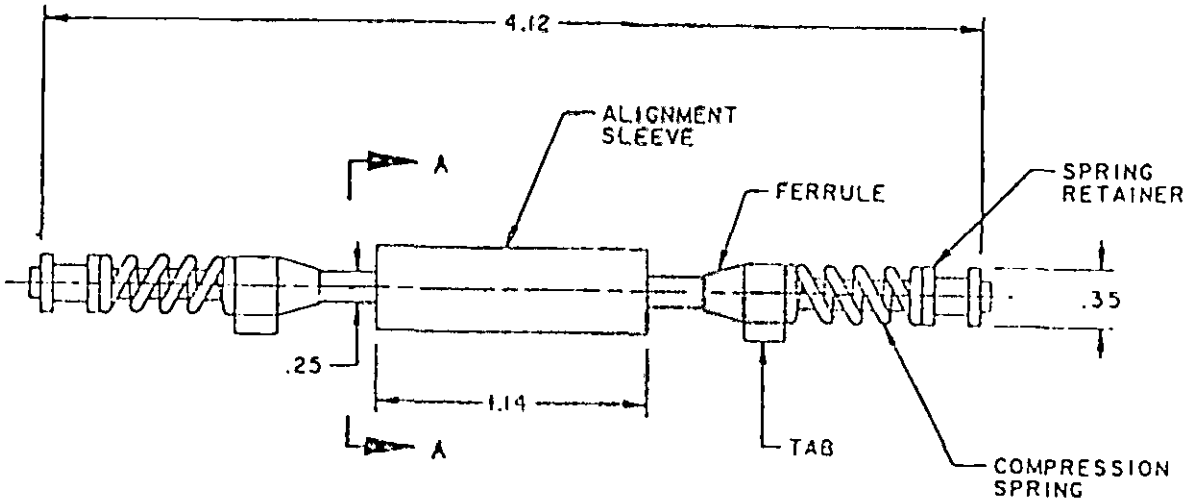



SECTION A-A


NOTE: All dimensions are in centimeters.

FIGURE 1. Rotary splice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:15Z
Check the source to verify that this is the current version before use.

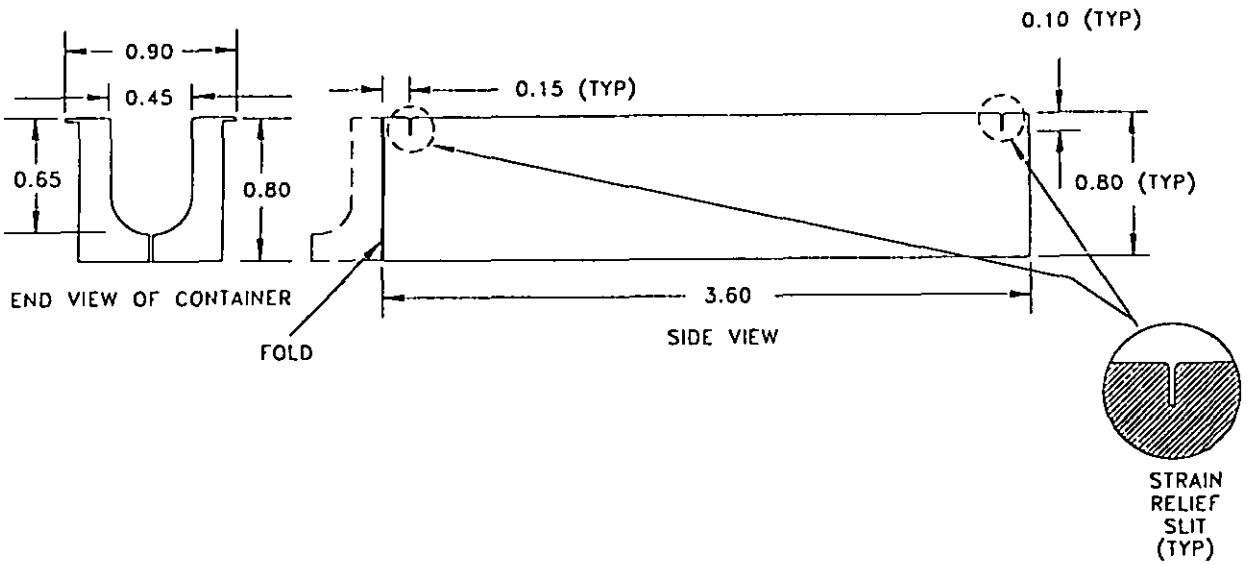

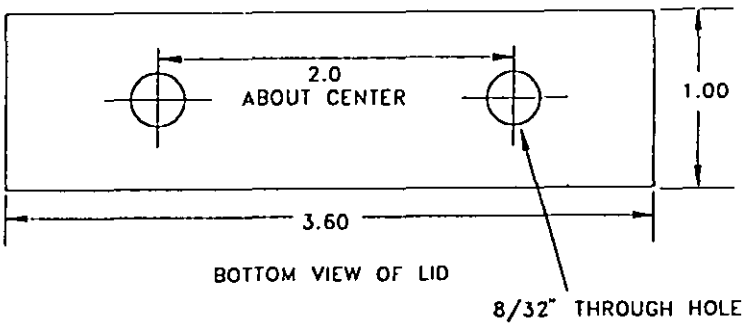

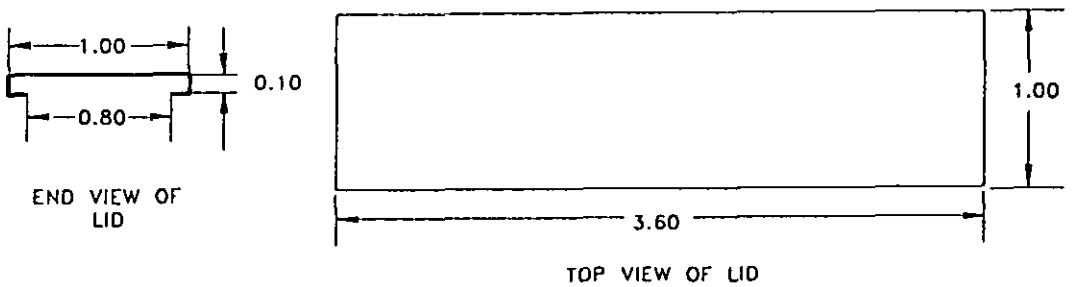

MATERIALS: STAINLESS STEEL
ROUNDED EDGES

INTENDED USE: HOUSING IS INTENDED TO BE USED WITH ROTARY SPLICE WHEN ROTARY SPLICE IS NOT USED IN SPLICE TRAYS.

FIGURE 2. Protective housing for rotary splice.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T03:15Z
Check the source to verify that this is the current version before use.

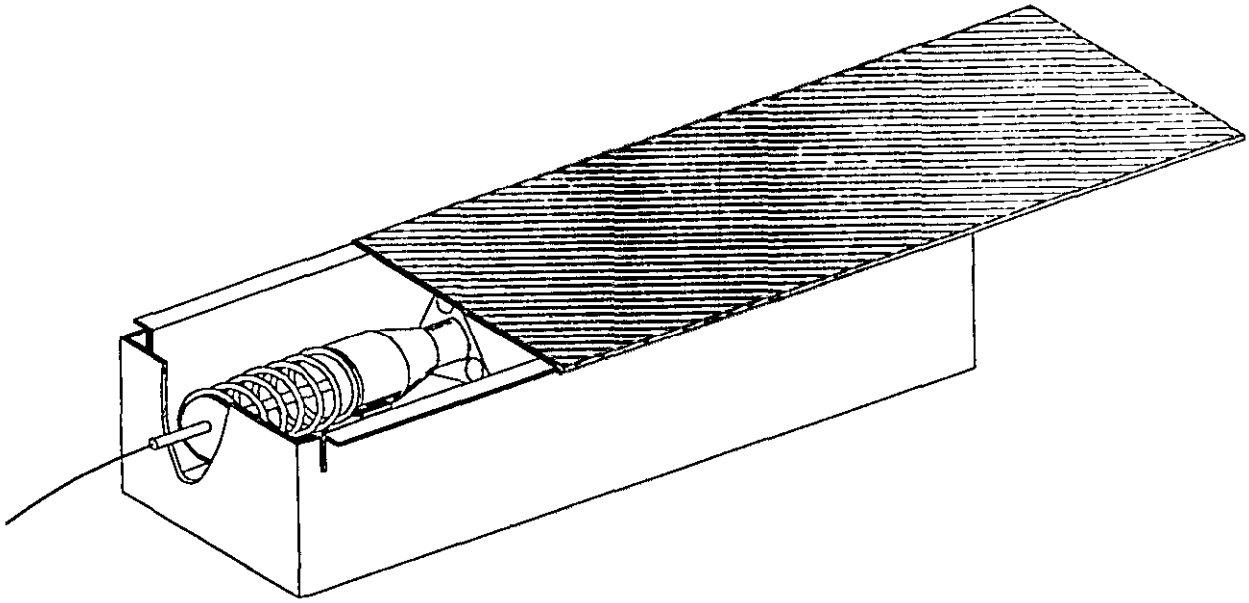


FIGURE 3. Rotary splice container in protective housing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:15Z
Check the source to verify that this is the current version before use.

Review activities:
Navy - EC, YD

Preparing activity:
Navy - SH
(Project 6060-N024-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:15Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE: 1989 - 604-033/03583