INCH-POUND

MIL-DTL-16034/8A
13 March 2008


SUPERSEDING
MIL-M-16034/8
2 January 1953

DETAIL SPECIFICATION SHEET

AMMETERS, AC, SWITCHBOARD, 6 INCH, 90-DEGREE SCALE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-10634.

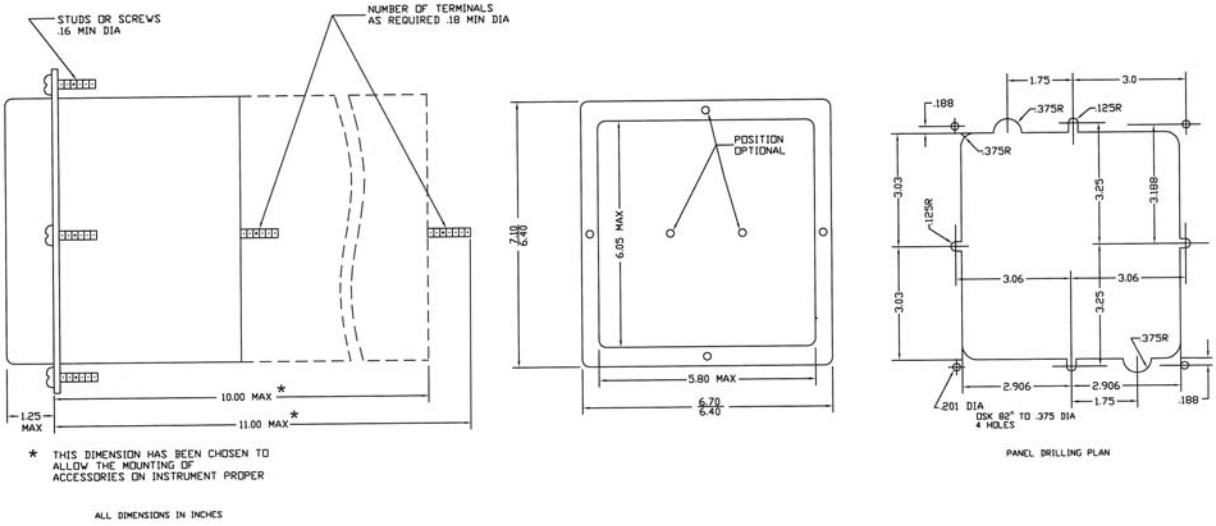

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

FULL-SCALE RANGES [2/]	MILLAMPERES, AC [1/]	AMPERES, AC [1/]				KILOAMPERES, AC [1/]	
	100	5	50	200	600	1	3
	200	10	75	300	800	1.2	4
	500	20	100	400		1.5	
		30	150	500		2	

NOTES:

[1/] Alternating current (60, 400, or 800 cycles per second).

[2/] Ammeters above 50 amperes and all kiloammeters are calibrated for use with external transformers. Current through meter at full-scale deflection is 5 amperes.

ITEM	REQUIREMENTS
Scale length	5 inches min
Position influence (balance)	1 percent of scale length, max change
Initial accuracy	1 percent max error
Damping factor	3 min
Response time	2.5 seconds max
Power consumption	5 VA max
Frequency range	60-cycle meters: 25 to 125 cycles, 2 percent max change
Frequency influence	0.5 percent max change for 60-cycle meters 2 percent max change for 400- and 800-cycle meters
External-field influence	3 percent max change in 5-oersted field
Heat effect at 65 °C	2 percent max change at 65 °C 0.5 percent max permanent change
Temperature influence	0.5 percent max change
Low-temperature exposure	1.25 percent max change at 0 °C 0.5 percent max permanent change
Momentary overload	1 percent max change
Sustained overload	1 percent of scale length, max temporary zero shift 0.5 percent of scale length, max permanent zero shift 0.33 percent max permanent change in indication
Vibration	1 percent max change
Friction effect	2 percent max change
Humidity resistance	2 percent max change

NOTES:

1. Percentages are based on full-scale value unless otherwise indicated herein.
2. Referenced specification shall be of the issue in effect on date of invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:13Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR
Navy – SH
Air Force – 99

Preparing Activity:
Navy – SH
(Project 6625-N087)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:13Z
Check the source to verify that this is the current version before use.